



Blowout Wall Hung Urinal
Vitreous China

FEATURES

• **7104 Expedio™**

7104 Expedio™ vitreous china, blowout wall urinal (1.0 gpf / 3.8 lpf) with 1 ¼" top spud, 2" I.P.S. female outlet connection.

Valve:* Flushvalve with vacuum breaker, 1" angle screwdriver stop and flush connection. Suggested (1.0 gpf / 3.8 lpf) gallon flushvalves are:



Sloan "Royal"	#180-1
Delany "Flushboy"	#F452-1
Zurn "Aquaflush"	#Z-6001-WS1

Support: Wall mounted with supplied concealed hangers and supporting bolts.

NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- For efficient operation of the urinal, a minimum flowing water pressure of 20 P.S.I. is required at the valve.
- ADA Compliant when mounted at 17" maximum height.



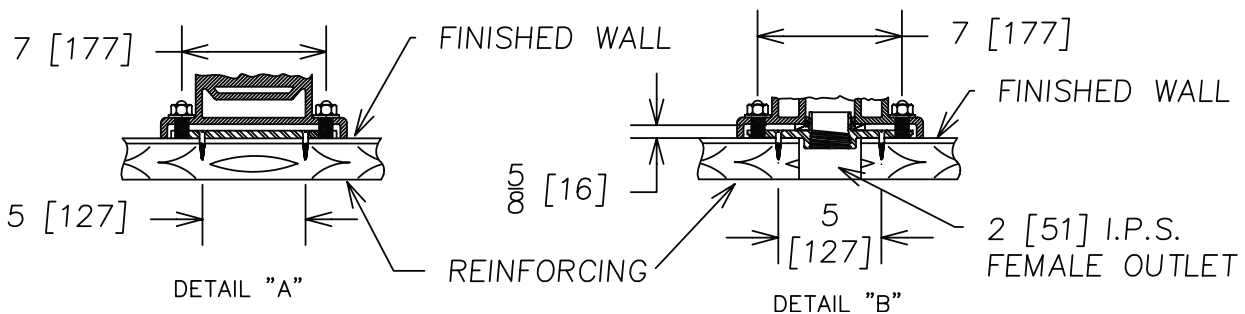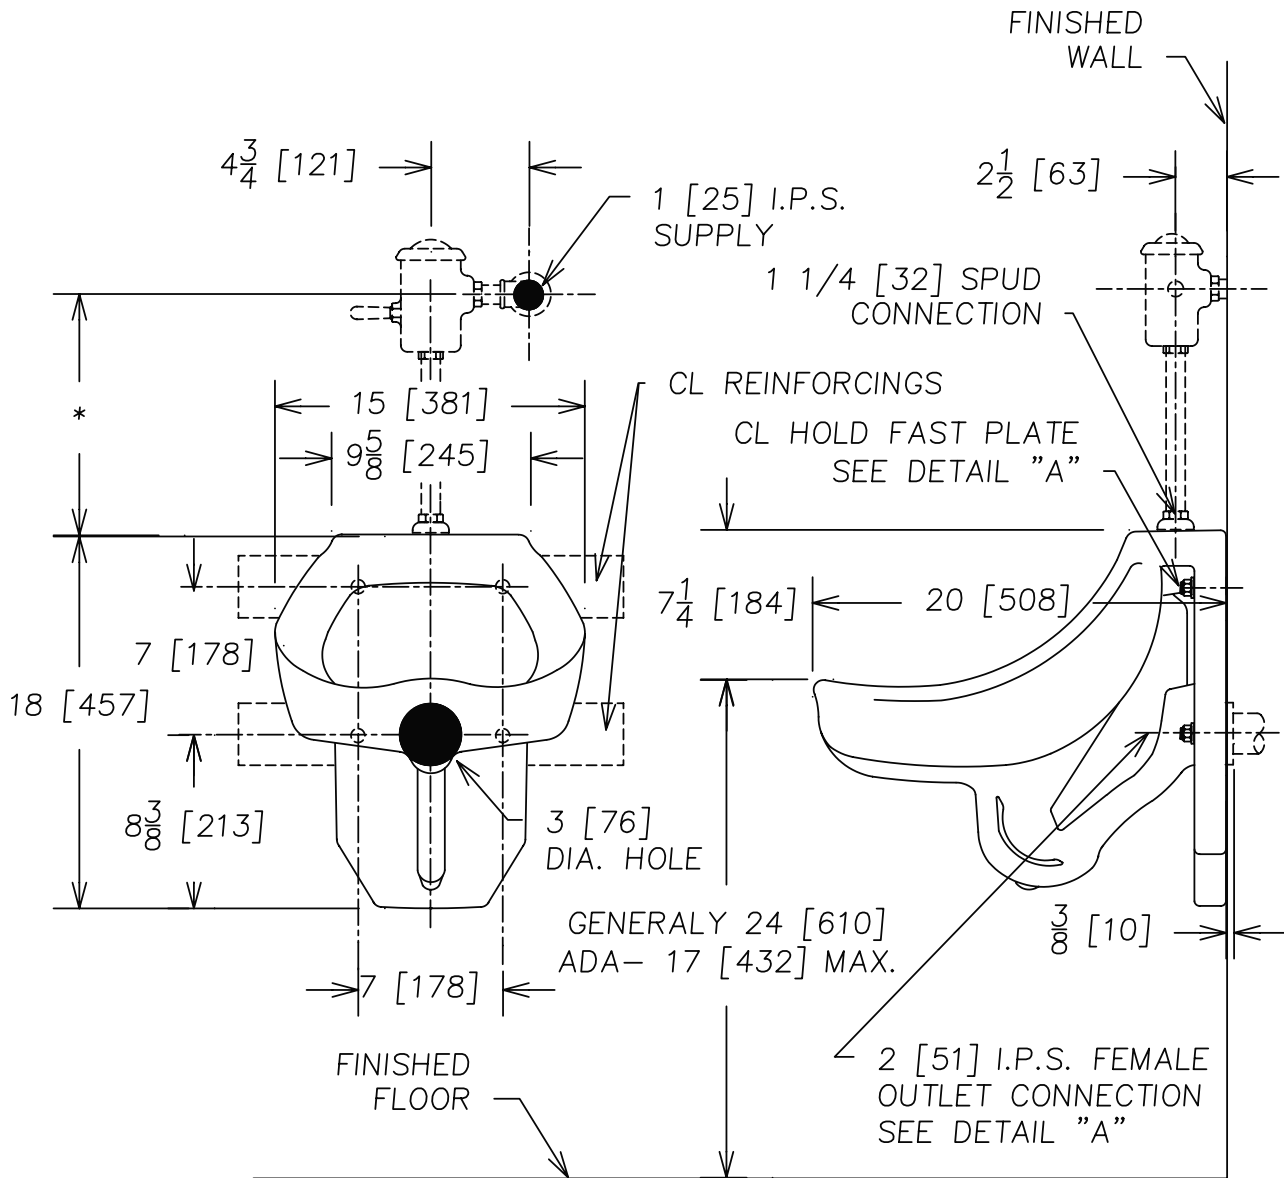

NOTE: * VARIABLE-CHECK WITH MANUFACTURER OF FLUSH VALVE FOR PROPER ROUGHING-IN DIMENSION.
 ** FIXTURE COMPLIES WITH AMERICANS WITH DISABILITIES ACT WHEN MOUNTED AT RIM HEIGHT OF 17".

IMPORTANT: Roughing-in dimensions may vary $\frac{1}{2}$ " and are subject to change or cancellation without prior notice.
 No responsibility is assumed for use of superseded or voided leaflets.

CR/PL© 04/03 Printed in U.S.A.