



**Low Consumption Wall Hung
Closet With Bedpan Lugs**
Vitreous China

FEATURES

• **3H722 Placidus™**

Bowl: 3H722 Placidus™ (1.6 gpf), vitreous china elongated rim, whirlpool flush, siphon jet, 1 1/2" top spud bowl with integral bedpan lugs.

Valve:* Flushvalve with vacuum breaker, 1" angle screwdriver stop and flush connection. Suggested (1.6 gpf), flushvalves are:

Sloan "Royal"	#111
Delany "Flushboy"	#F402-1.6
Zurn "Aquaflush"	#Z-6000-WS-1

Bedpan Cleanser:

Supply:

Seat:

Color:

Support:


NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- **For efficient operation of the bowl, a minimum flowing water pressure of 25 P.S.I. is required at the valve.
- Fixture complies with Americans With Disabilities Act, when mounted at rim height of 17".

WATER ECONOMY FACTS

Average Gallons Per Flush	**25 PSI	50 PSI	80 PSI
3H722 Elongated Rim (gpf)	1.40	1.50	1.50
Trapway.....	2"		
Water Surface.....	12" x 10"		
Water Seal.....	2 9/16"		



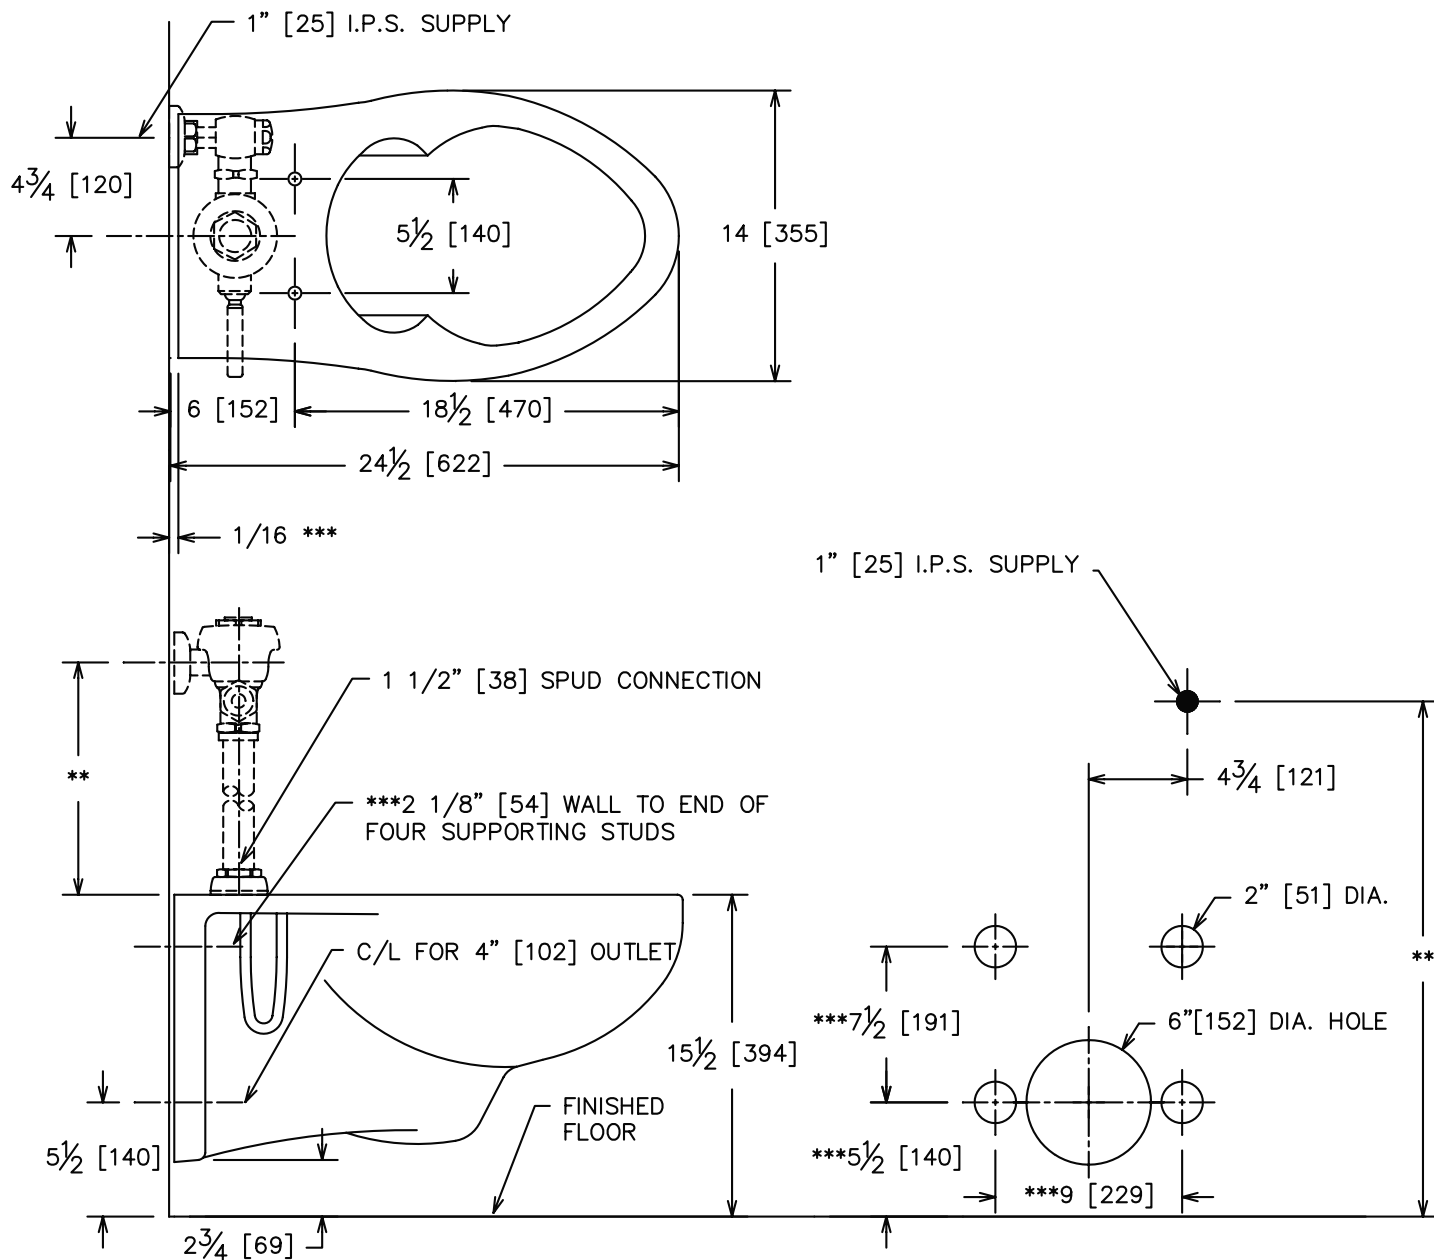

NOTES: ** VARIABLE - CHECK WITH MANUFACTURER OF FLUSHVALVE FOR PROPER ROUGHING-IN DIMENSION.

*** THESE DIMENSIONS MUST BE MAINTAINED FOR PROPER INSTALLATION. ROUGHING-IN DIMENSIONS FOR CLOSET SUPPORTING UNIT TO BE OBTAINED DIRECT FROM MANUFACTURER. CHECK WITH MANUFACTURER FOR PROPER OUTLET COUPLING EXTENSION BEYOND FINISHED WALL. FOR OUTLET CONNECTION USE NEOPRENE OR RUBBER GASKETS. NOT FOR USE WITH A WAX RING.

**** FIXTURE COMPLIES WITH AMERICANS WITH DISABILITIES ACT WHEN MOUNTED AT RIM HEIGHT OF 17".