



**Low Consumption Wall Hung  
Water Closet Bowl**  
Vitreous China

**FEATURES**

• **3H723 Placidus™**

**Bowl:** 3H723 Placidus™ (1.6 gpf), vitreous china elongated rim, whirlpool flush, siphon jet, 1½" back spud, wall hung bowl with self-draining jet.

**Valve:\*** Flushvalve with vacuum breaker, 1" angle screwdriver stop and flush connection. Suggested (1.6 gpf) flushvalves are:

Sloan "Royal"	#143-1.5
Delany "Flushboy"	#F534-1.6
Zurn "Aquaflush"	#Z-6143-WS-1

**Supply:**

**Seat:**

**Color:**

**Support:**

**NOTES**


- Fixture conforms to ANSI/ASME A112.19.2M standard.
- \*\*For efficient operation of the bowl, a minimum flowing water pressure of 25 P.S.I. is required at the valve.
- Fixture complies to ADA requirements when mounted at rim height of 17".
- Fully glazed trapway.

**WATER ECONOMY FACTS**



Average Gallons Per Flush	**25 PSI	50 PSI	80 PSI
3H723 Placidus (gpf)	1.40	1.50	1.50
Trapway.....	2"		
Water Surface.....	12" x10"		
Water Seal.....	2 ⅞"		

\* Not furnished by CR/PL, L.L.C. Description for specification purposes only.





\*\*\*\*ADA COMPLIANCE

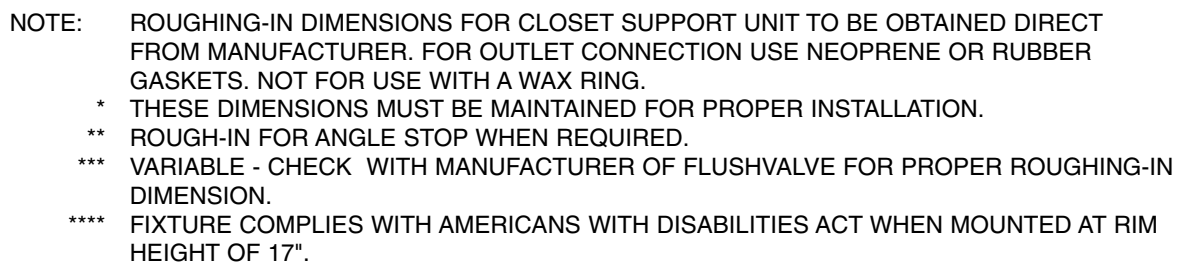

CR/PL© 12/02 Printed in U.S.A.