



**Low Consumption Wall Hung
Blow-Out Bowl**
Vitreous China

FEATURES

• **3462 Rapidway™**

Bowl: 3462 Rapidway™ (1.6 gpf / 6.0 lpf) blowout action, elongated rim, 1½" back spud, wall hung with integral seat.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (1.6 gpf / 6.0 lpf) flushvalves are:

Sloan "Royal" #143-1.5
Delany "Flushboy" #F534-1.6
Zurn "Aquaflush" #Z-6143-WS-1

Bowl: 3462 Rapidway™ (3.5 GPF/13.2 LPF) blowout action, elongated rim, 1½" back spud, wall hung with integral seat.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (3.5 GPF/13.2 LPF) flushvalves are:

Sloan "Royal" #152
Delany "Flushboy" #534-AVB
Zurn "Aquaflush" #Z-6152

• **3464 Rapidway™**

Bowl: 3464 Rapidway™ (1.6 gpf / 6.0 lpf) blowout action, elongated rim, 1½" back spud, wall hung with seat post holes.

Valve: See 3462 (1.6 gpf / 6.0 lpf) valve specifications.

Bowl: 3464 Rapidway™ (3.5 gpf / 13.2 lpf) blowout action, elongated rim, 1½" back spud, wall hung with seat post holes.

Valve: See 3462 (3.5 gpf / 13.2 lpf) valve specifications

Supply:

Seat:

Color:

Support:


NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- **For efficient operation of the bowl, a minimum flowing water pressure of 25 P.S.I. is required at the valve.
- Fixture complies to ADA requirements when mounted at rim height of 17".
- Fully glazed trapway.

WATER ECONOMY FACTS

Average Gallons Per Flush	**25 PSI	50 PSI	80 PSI
3462 Elongated Rim (1.6 GPF)	1.58	1.59	1.58
3462 Elongated Rim (3.5 GPF)	3.50	3.50	3.50
Trapway.....	2 ½"		
Water Surface.....	12 X 10"		
Water Seal.....	2 ½"		



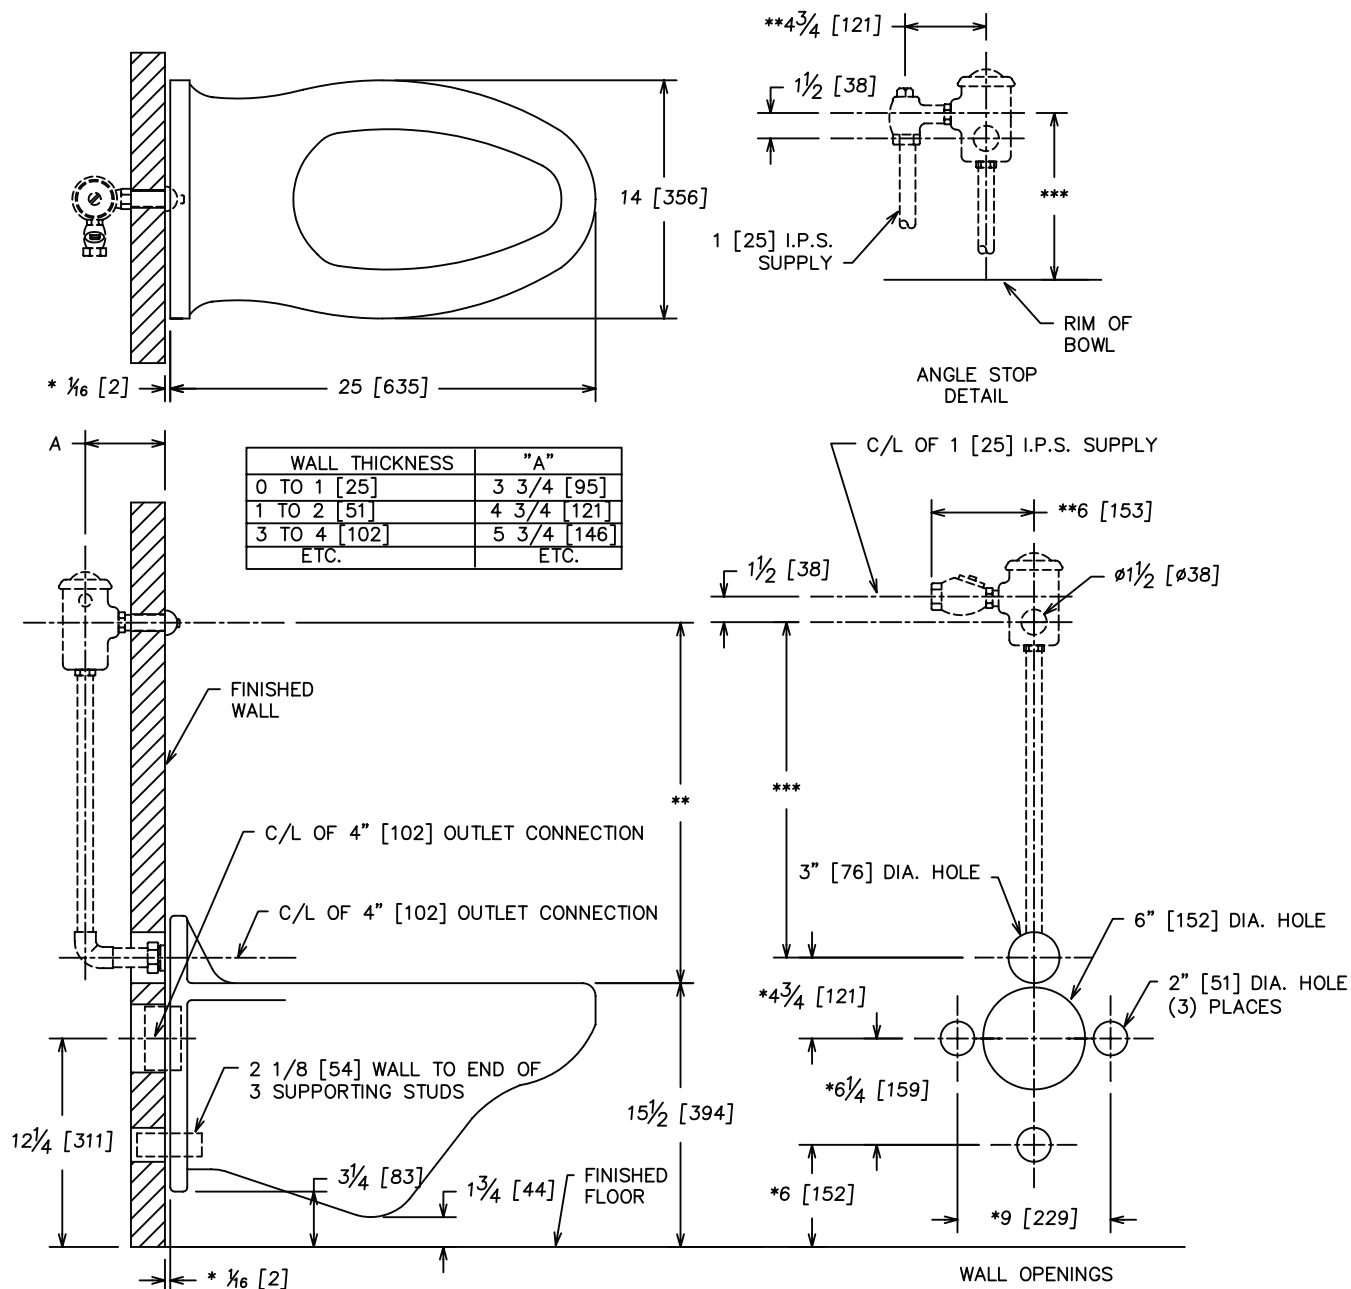

NOTE: ROUGH-IN DIMENSIONS FOR CLOSET SUPPORTING UNIT TO BE OBTAINED DIRECT FROM MANUFACTURER. CHECK WITH MANUFACTURER FOR PROPER OUTLET COUPLING EXTENSION BEYOND FINISHED WALL.

ALTERNATE CHOICE: 3464E SAME AS ABOVE EXCEPT WITH HOLES FOR SEAT INSTEAD OF INTEGRAL SEAT.

* THESE DIMENSIONS MUST BE MAINTAINED FOR PROPER INSTALLATION.

** ROUGH-IN ANGLE STOP WHEN REQUIRED.

*** VARIABLE-CHECK WITH MANUFACTURER OF FLUSHVALVE FOR PROPER ROUGHING-IN DIMENSION.

**** FIXTURE COMPLIES WITH AMERICANS WITH DISABILITIES ACT WHEN MOUNTED AT RIM HEIGHT OF 17".

FOR OUTLET CONNECTION USE NEOPRENE OR RUBBER GASKETS. NOT FOR USE WITH A WAX RING.