

ADAF SHOWER FLOOR

ADAF3636
ADAF6030
ADAF6036

Shower Floor
High Gloss Gelcoat Finish



FEATURES

- **ADAF 3636**

39" x 38 1/2" outside (nominal). One piece construction shower module.

This unit is made of sanitary grade polyester high gloss gelcoat with reinforced composite matrix. This unit shall have a fire rating of "B" and a flame spread of less than 75.

The shower floor shall have a slip-resistant, textured finish, integral molded drain with chrome plated strainer and shall be installed in a pit 1 3/4" deep so the finished floor will be level with the top of the threshold.

It is required that the shower floor be set in a mortar base, leveled and any clearances between the pit opening and the shower floor be filled with mortar. Shimming is necessary. It is recommended that a floor drain at or near the entrance to the shower be included.

- **ADAF 6030**

Same as above except 64" x 33"

- **ADAF 6036**

Same as above except 63 1/2" x 38 1/2"

NOTES


- *Anti-skid floor treatment meets performance requirements of ASTM F-462-78.*
- *Units conform to ANSI A-117.1 and ANSI Z-124.2; the shower also complies with the guidelines issued by ADA, US Architectural and Transportation Barriers Compliance Board (A & T.B.C.B.) and with most city, state, and national standards for barrier free, accessible shower facilities for the handicapped.*
- *Factory installed components are provided with additional back reinforcements to provide code complying structural integrity and are sealed from the backside.*
- *Anti-skid floor treatment meets performance requirements of ASTM F-462-78.*
- *The shower floor shall conform to ANSI Z124.2 and ANSI A117.1.*

OPTIONS



 **FIAT PRODUCTS**
ACRANE PLUMBING COMPANY

ADAF SHOWER FLOOR

Shower Receptor

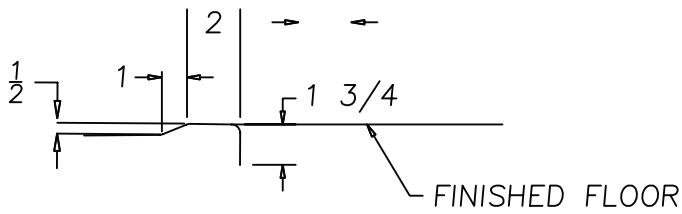

Detail A-A

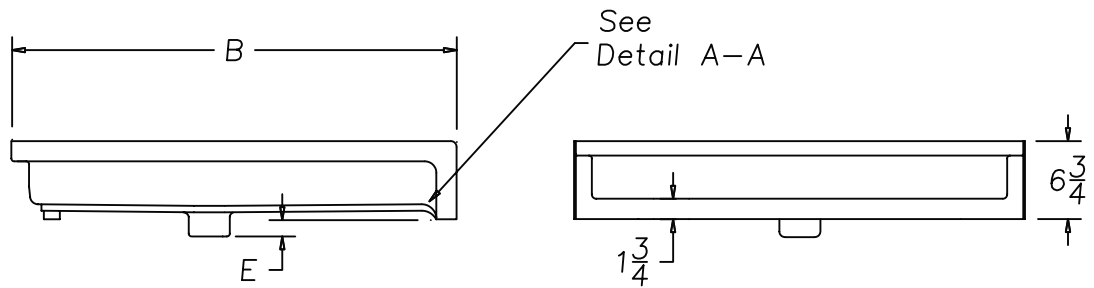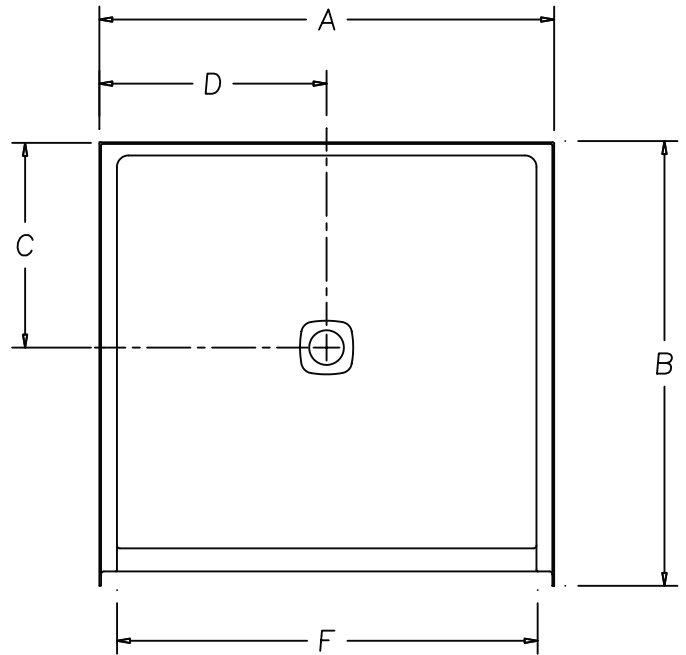

MODEL	A	B	C	D	E	F
ADAF-3636	39"	38 1/2"	17 3/4"	19 1/2"	1 1/2"	36"
ADAF-6030	64"	33"	17 3/4"	32"	1 1/2"	60 3/4"
ADAF-6036	63 1/2"	38 1/2"	19"	31 3/4"	1 1/2"	60 1/4"