

## Titan<sup>TM</sup> PRO

32062

Elongated Front, Triangle Tank Two-Piece Toilet



• Elongated Rim

- Top Rated Performance 1.6 gpf / 6.0 lpf
- 15" Rim Height
- Features the ProOne<sup>TM</sup> Flushing System
- High Volume 3" [76mm] Flush Valve with Chlorine-Resistant Flapper
- Extended Footprint for Easier Remodeling
- Brass Tank to Bowl Bolts
- 12" [305 mm] Rough-in
- 2-1/8" [54 mm] Fully Glazed Trapway
- Side Mount, Left Hand, Color-Matched, Trip Lever
- Concealed Sanitary Bar for Easy Cleaning
- Available in White, Bone, and Biscuit
- Limited Lifetime Warranty



32062	Elongated front, two-piece toilet combination with 3" [76mm] flush valve, 12" [305 mm] rough-in. Includes side mount, left hand, color-matched, trip
32008 32026	lever. Less toilet seat and supply. Elongated front toilet bowl only. 12" [305 mm] rough-in. Less toilet seat. Triangle Tank and lid only with tank trim including 3" [76 mm] flush valve and side mount, left hand, color-matched, trip lever. Less supply.

Toilet Seat Shown Not Included



32006	12" Rough-In Tank
32046	12" Rough-In Insulated Tank



P33001100 P33001208 P33001251	Side Mount, Left hand, Trip Lever - White (Standard with White tanks) Side Mount, Left hand, Trip Lever - Bone (Standard with Bone tanks) Side Mount, Left hand, Trip Lever - Biscuit (Standard with Biscuit tanks)
P33001068	Side Mount, Left hand, Trip Lever - Polished Chrome
8080	Elongated, "Lift 'n' Clean", heavy-duty plastic, toilet seat



 $Titan^{TM} PRO$  32062

## Specifications

Water Pressure Range: 20 to 80 P.S.I. Flush System: ProOne<sup>TM</sup> Flushing

System

Water Usage: 1.6 gpf /6.0 lpf Water Surface Area: 9" x 11"

[229 mm x 279 mm]

**Trap Diameter:** 2-1/8" [54 mm] **Water Seal:** 2-1/2" [64 mm]

Shipping Cubes:

32013 Bowl: 4.5 ft<sup>3</sup> [.13m<sup>3</sup>] 32026 Tank: 1.95 ft<sup>3</sup> [.05m<sup>3</sup>]


Shipping Weight:

32013 Bowl: 53 lbs. [24 kg] 32026 Tank: 37lbs. [17 kg]

Warranty:

Vitreous China - Limited Lifetime

Parts - Limited One Year

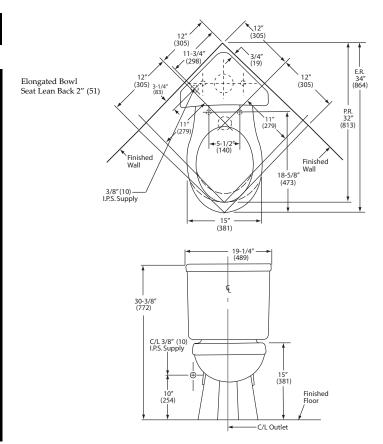

IMPORTANT: These dimensions are nominal and may vary within the range of tolerances established by ASME Standard A112.19.2

## Features and Upgrades

- Triangle Tank for Space-Saving Corner Installation
- Extended Footprint easily covers existing floor gaps
- Stabalizer bars for rigid tank to bowl support
- cUPC registered

Customer Care at American Standard P.O. Box 6820 1 Centennial Plaza Piscataway, NJ 08855-6820 1-800-442-1902 Monday - Friday 8:00 A.M. to 6:00 P.M. EST American Standard Canada 2480 Stanfield Road Mississauga, Ontario L4Y 1S2 Toll Free: 1 (800) 387-0369 Greater Toronto Area & Mississauga: (905) 306-1093 Hours: 9am - 5pm, Monday - Friday (EST)

