

SIMPLEX®

CEILINGS

255 Montpelier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com


Specifications

Linear "D" Series



- Panels:** Provide Simplex Ceilings **Un-perforated "D"** (100/200) systems in .022 in (.56 mm) thick aluminum, and "D" 300 in 0.027 in (0.70 mm) thick aluminum.
- Provide Simplex Ceilings **Perforated** D-100 in 0.018 in (0.45 mm), D-200 in 0.022 in (0.56 mm), D-300 in 0.027 in (0.70 mm) thick aluminum.
- Perforations:** **Pattern AL-21 standard:** 1 mm (.039 in) dia. holes on 2 mm (.080 in) centre in a 60 degree pattern, open area of 22%. The integral filler strip gives 20 mm (7/8 in) closed reveal between panel faces. Complete with black textile acoustical membrane.

PANEL SIZES

	W	H	R
D-100	4" (100 mm)	5/8" (15 mm)	3/4" (20 mm)
D-200	8" (200 mm)	5/8" (15 mm)	3/4" (20 mm)
D-300	12" (300 mm)	5/8" (15 mm)	3/4" (20 mm)

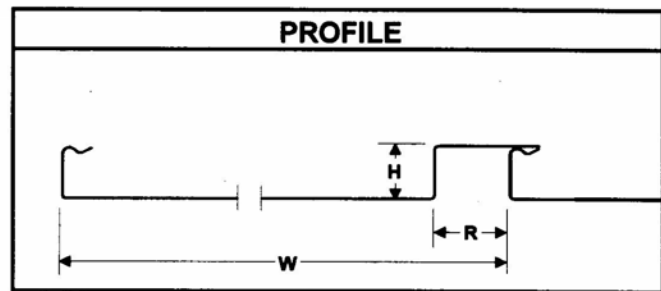

- Finish:** **Un-perforated panels:** select from Simplex Linear Metal Standard finishes
Perforated panels: standard color white 301
For all panels: custom colors are available upon request.
- Carriers:** **Interior:** Modular no. 40 carrier installed on 4 ft (1219 mm) centers. Include twist suspension clips.
Carrier is provided with pre-punched lugs and cut-outs for modular spacing.
Exterior: Modular no 40 carrier installed on 3 ft (914 mm) centers and down braced as required. Carrier is provided with pre-punched lugs and cut-outs for modular splicing. Reverse pre-punched panel locking clips are included to prevent panels from being dislodged.
- Perimeter:** Provide Edge Trim Type1 perpendicular to panel direction, Edge Trim Type 2 parallel to panels.
- Accessories:** Supply face plates for all down lights and ceiling speakers. Finish to match panels and twist suspension clips.

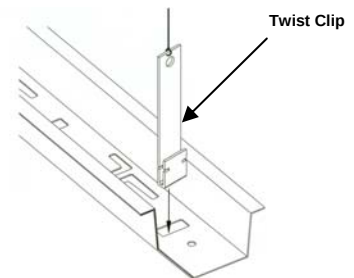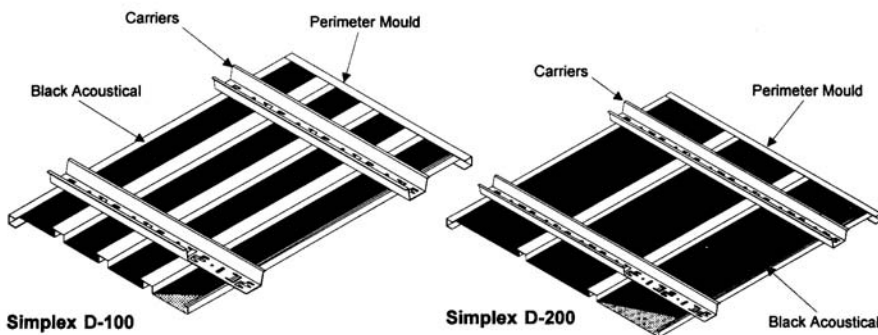

Insert the Clip
Into Slot
and Twist it.