
Product and Cut-out Dimensions G4500SCi Integrated Slimline Series Dishwasher



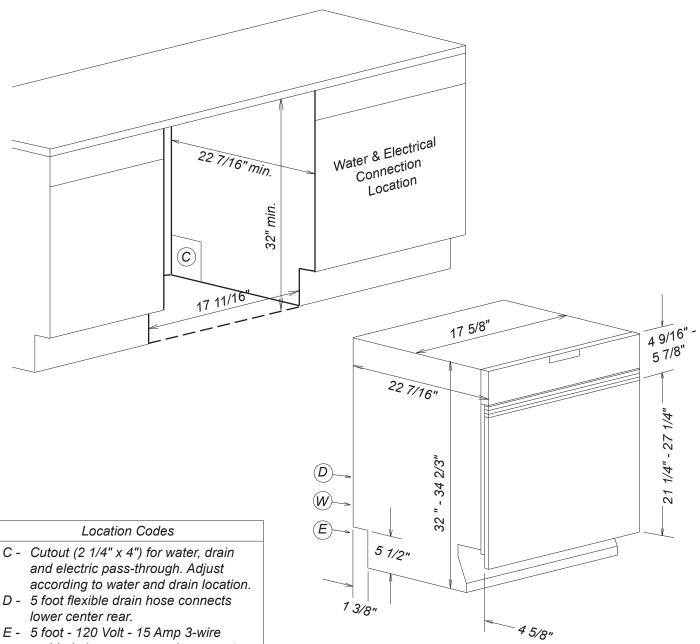


- molded plug power supply connects lower left rear.
- W 5 foot "Double Waterproof" flexible water intake hose connects lower center rear.

Notes

- · All installations must be done in accordance with local codes
- Additional 2" in height may be attained by ordering Miele UBS-1 extension feet

Product and Cut-out Dimensions G4500SCi Integrated Slimline Series Dishwasher



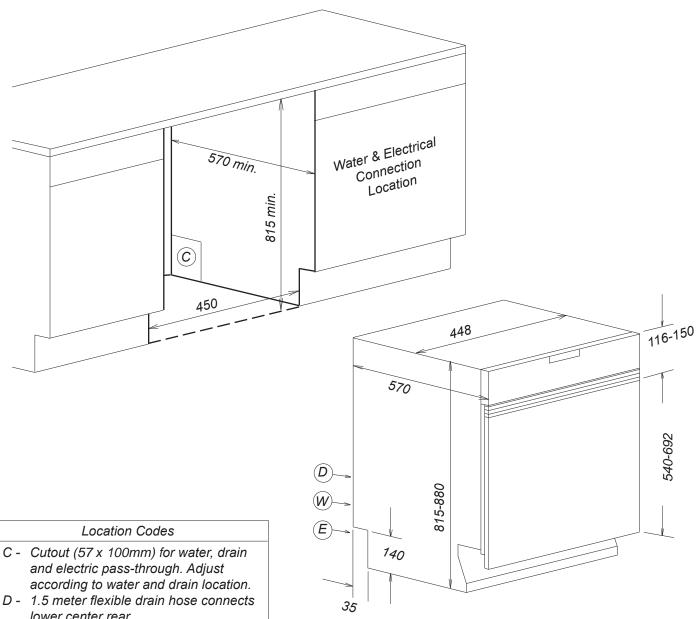

- lower center rear.
- E 1.5 meter 120 Volt 15 Amp 3-wire molded plug power supply connects lower left rear.
- W 1.5 meter "Double Waterproof" flexible water intake hose connects lower center rear.

Notes

- · All installations must be done in accordance with local codes
- Additional 50mm in height may be attained by ordering Miele UBS-1 extension feet


Front Panel Information G4500SCi Integrated Slimline Series



Custom Panel Installations

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by the cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

Panel size is determined in the following manner:

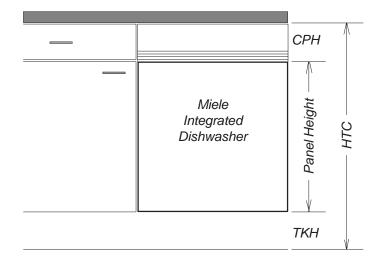

Width: 17 1/2" (444.5 mm) in all cases

Thickness: 3/4" (19 mm) in all cases

Height: Determined using the following calculation:

Panel Height = HTC - CPH - TKH

HTC = Height to the underside of countertop

CPH = Control panel height (Note 1)

TKH = Toe-kick height

Note 1: Control Panel Height is determined by the height of the drawers in the cabinets. This height is adjustable between 4 5/8" and 5 7/8" with spacer strips provided.

 Maximum panel height:
 27 1/4" (692 mm)

 Minimum panel height:
 21 1/4" (540 mm)

Maximum panel weight:

White / Black 23 Pounds (10.4 kg) Stainless Steel 19 Pounds (8.6 kg)


GDU Kit Installations

In lieu of a custom front, Miele offers a decorative panel system called a GDU kit. GDU kits vary depending upon the model chosen. Each GDU kit contains a front panel and a toe-kick cover.


Technical Information: G4500SCi Dishwashers



G4500 Series



Interior cabinet height

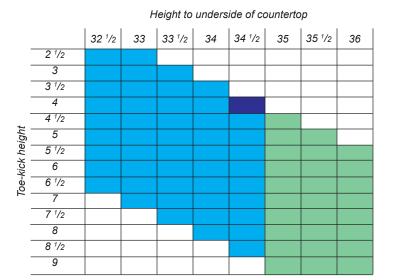


For Integrated installations



Acceptable combinations
Typical American installation
With extension feet

Water Connection

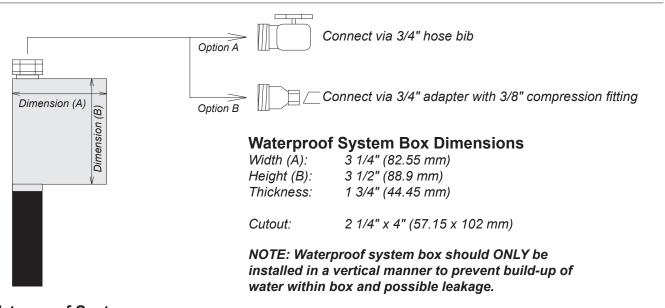

Waterproof System

Temperature: 110° - 130° F Pressure: 4.5 - 145 PSI

Drain hose: 7/8" ID - 5 feet long (1.5 meters)