

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

.25

Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Cross Handles in Chrome Complies with 0.25% WALC

STYLE No. 667792

REFERENCE No. Reference-Number

ITEM No. 07-30294-86106

SPECIFICATIONS

PAGE 1 OF 3

DESIGN

The signature details of our .25 collection serve as the inspiration for the .25 range. Graceful, clean, reductive sculptural forms deliver water in the most modern way possible, through elegant simplicity.

FEATURES

Brass material is used for all trim and valve component parts.

The manufacturing process encompasses casting, turning, hand-fitting and hand polishing.

A comprehensive product line of fittings options for the lavatory, shower, and bathtub.

Available option that complies with 0.25% Weighted Average Lead Content (WALC).



SHOWN IN Nickel

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM


.25

Low Profile Three Hole Deck Mounted Lava-
tory Faucet with Metal Cross Handles in
Chrome Complies with 0.25% WALC

STYLE No. 667792
REFERENCE No. Reference-Number
ITEM No. 07-30294-86106

SPECIFICATIONS
PAGE 2 OF 3

*All dimensions are
based on original
specifications and
are subject to change
and variation. Please
consult your Design
Associate for current
specifications.*

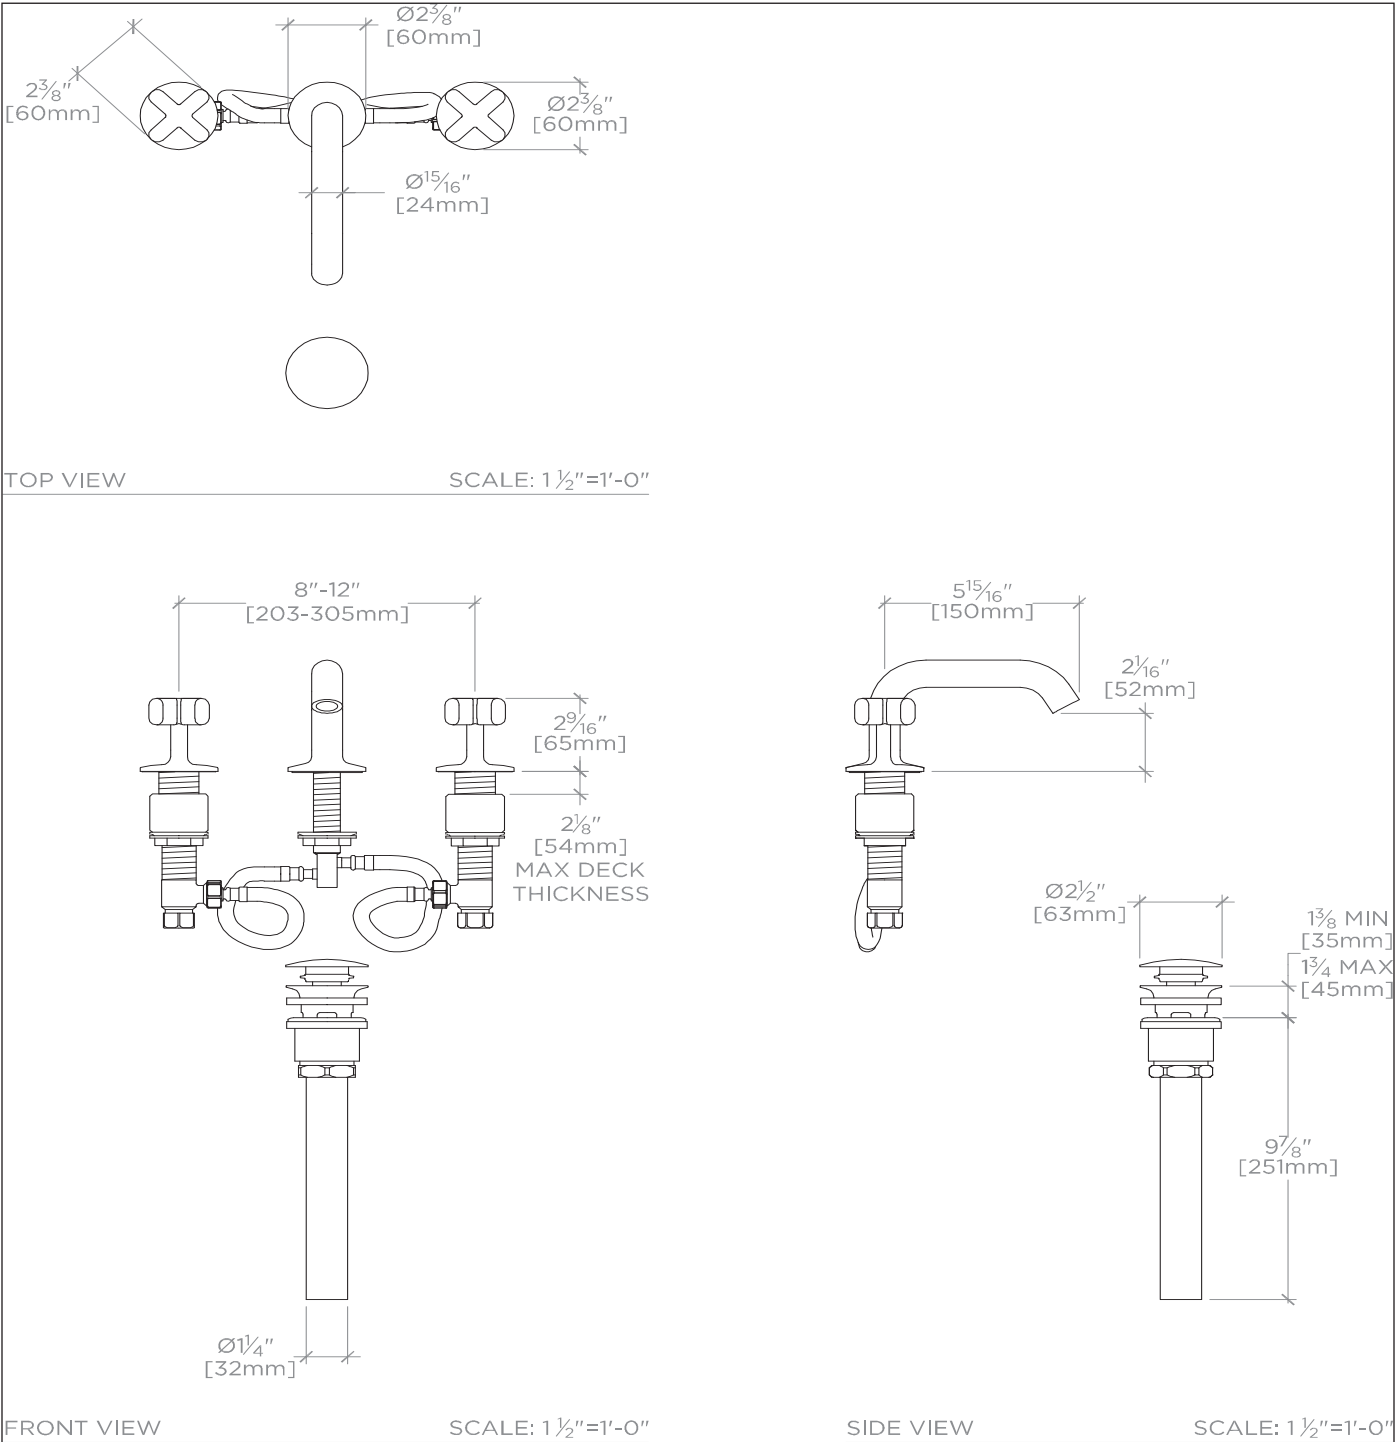

WATERWORKS

PRODUCT SUPPORT
800.927.2120
WATERWORKS.COM

.25

Low Profile Three Hole Deck Mounted Lavatory Faucet with Metal Cross Handles in Chrome Complies with 0.25% WALC

STYLE No. 667792

REFERENCE No. Reference-Number

ITEM No. 07-30294-86106

SPECIFICATIONS

PAGE 3 OF 3

SPECIFICATIONS

Primary Material: Brass
Drain Depth Maximum: 1 ¾"
Drain Depth Minimum: 1 ¼"
Drain Hole Diameter: 1 ¾"
Drain Style: Push Touch
Handle Spread Maximum: 12"
Handle Spread Minimum: 8"
Inlet Connection Size: ½"
Inlet Connection Type: Male With Supply Nut
Inlet Supply Spread Maximum: 12"
Inlet Supply Spread Minimum: 8"
Maximum Deck Thickness: 2 ⅛"
Minimum Deck Thickness: ⅛"
Maximum Water Pressure: 75 psi
Minimum Water Pressure: 20 psi
Fittings Hole Diameter: 1 ⅜"
Recommended Water Pressure: 45 psi
Restricted Maximum Flow Rate: 2.2 gpm

CARE INSTRUCTIONS

To clean the finish, wipe gently with a soft damp cloth and then with a soft dry towel. A mild soap solution can be used for daily cleaning.

CODES AND STANDARDS

ASME A112.18.1 / CSA B125.1, ASME A112.18.2 / CSA B125.2, ANSI NSF 61 Sect. 9, State of MA

FLOW RATE CURVE

REQUIRED PLUMBING DETAILS

Below is a list of choices that must be made to complete your lavatory faucet.