

## INSTALLATION INSTRUCTIONS

P66274

## THANK YOU FOR CHOOSING KALLISTA

We appreciate your commitment to Kallista quality products. Please take a moment to review this manual before you install your Kallista product. If you encounter any installation or performance problems, please do not hesitate to contact us at the phone number listed at the bottom of the page.

## BEFORE YOU BEGIN



**CAUTION: Risk of personal injury or product damage.** Handle with care. Vitreous china can break or chip if the product is handled carelessly.

- ☐ Prior to installation, unpack the console table and legs and inspect it for damage. If the product is damaged, please contact Kallista immediately at the phone number listed at the bottom of the page
- ☐ Shut off the main water supply.
- ☐ Observe all local plumbing codes.
- ☐ Provide sufficient support behind finished wall such as wall bracing. The wall bracing should be a minimum of a 2 x 6.
- ☐ This installation is designed to be done with a minimum of two people. Do not install this fixture alone.
- ☐ When drilling holes, the dimensions given assume floors and walls that are square, plumb, and level. Adjust accordingly for conditions that are not square, plumb, or level.
- ☐ Kallista reserves the right to make revisions in the design of plumbing products without notice, as specified in the Price Book.

## TOOLS AND MATERIALS




Drill



Pencil



Level



Sealant


Tape  
MeasureAdjustable  
WrenchAssorted  
Screwdrivers

## INSTALLATION INSTRUCTIONS

P66274


## 1. PREPARE THE SITE

- ☐ Rough in the water supply lines and the drain piping using specification sheet as a guide.
- ☐ Install sufficient backing material behind the finished wall to provide support for the console table.
- ☐ Finish the wall.
- ☐ Mark a centerline on the floor and wall.
- ☐ Drill holes in locations shown.

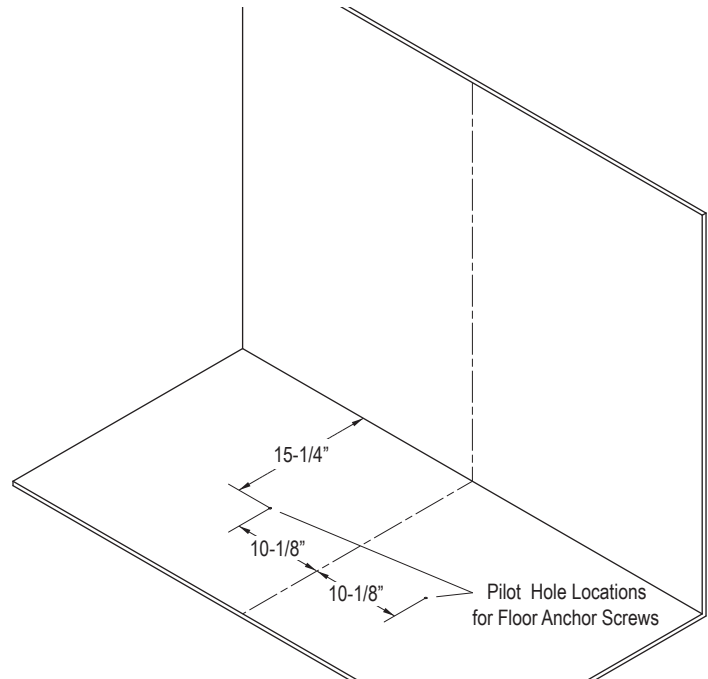

## 2. MARK SLOT LOCATIONS

- ☐ Install the floor anchors to the floor by turning a wood screw through the floor anchor and into the holes in the floor.
- ☐ Place the console table legs over the floor anchors. Have a helper place the console table on top of the legs and against the wall. Align top of console table legs with recessed areas in bottom of console table.
- ☐ With the helper holding the console table to prevent falling, level the console table front to back and side to side. Mark the location of the slots with a pencil.
- ☐ Set the console table and console table legs to the side. Drill holes in the locations marked.

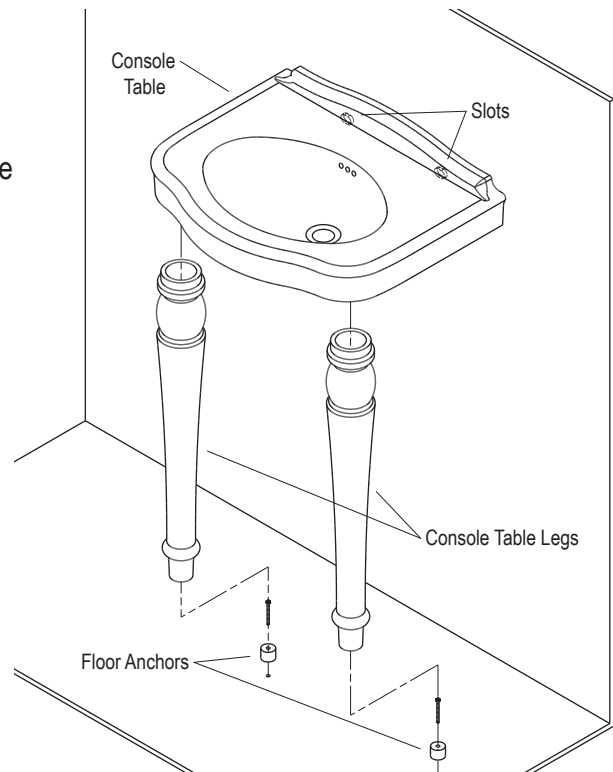

## INSTALLATION INSTRUCTIONS

P66274

## 3. INSTALL CONSOLE TABLE AND LEGS

- ☐ Loosely attach the console table to the wall with lag bolts. Be sure to leave a small space between the wall and the console table.
  - ☐ With two installers, lift front of console table up slightly. Place holes in bottom of console table legs over floor anchors. Align top of console table legs with recessed areas in bottom of console table. Gently lower console table.
- ⚠ CAUTION: Risk of product damage.** Do not overtighten lag bolts. Overtightening may cause console table to break or chip.
- ☐ Tighten lag bolts so console table rests against the wall.
  - ☐ If desired, apply a bead of sealant to the seam between console table and finished wall. Follow the sealant manufacturer's instructions

