



Right-hinged

BO 250 611

Stainless steel-backed full glass door

Width 24" (60 cm)

BO 250 631

Aluminum-backed full glass door

Width 24" (60 cm)

Left-hinged

BO 251 611

Stainless steel-backed full glass door

Width 24" (60 cm)

BO 251 631

Aluminum-backed full glass door

Width 24" (60 cm)

Included accessories

- 1 baking tray, enameled
pyrolytic-safe
- 1 broiling tray
- 1 wire rack
- 1 meat probe

Optional accessories

BA 016 103

Pull-out system

Enameled cast-iron frame and fully extendable telescopic rails.

BA 026 113

Baking tray, enameled

1" deep.

BA 036 103

Wire rack, chromium-plated

Without opening, with feet.

BA 046 113

Glass tray

1" deep.

BA 056 113

Heating element

Necessary accessory for baking stone BA 058 133.

BA 056 133

Baking stone

With support and pizza peel (heating element must be ordered separately).

BS 020 002

Pizza peel, additional set of 2

BA 226 103

Broiling tray, enameled

1" deep.

GN 340 230

Non-stick aluminum cast-iron roaster

4" deep, with 2 1/2" lid.

200 series single oven

BO 250/251

- Stainless steel or aluminum-backed full glass door with panoramic view.
- 12 heating modes, with meat probe and baking stone option. Exceptional equipment for optimum cooking results.
- Pyrolytic self-cleaning system for easy oven cleaning.

Universal heating system with 12 heating modes.

Electronic precision temperature control from 85°F – 550°F.

Net volume 3.6 cu.ft.

Features

LCD function display with digital clock.

Timer functions: cooking time, switch off time, short-term timer, stop watch, sabbath mode.

Rotary knob and touch key operation.

Meat probe with automatic shut off.

Actual temperature display.

Super-Quick preheating.

Baking stone outlet.

Menu settings.

60 W halogen light on the top.

10 W halogen light on the side.

Enameled wire racks on the side with 4 rack levels, pyrolytic safe.

Side-opening door opens up to 180° angle.

Safety

Thermally insulated door with quadruple glazing.

Child lock.

Safety lock.

Cooled housing with temperature protection.

Cleaning

Pyrolytic self-cleaning.

Gaggenau Clean-Enamel.

Heated air cleaning catalyst.

Planning notes

Door hinge not reversible.

The front of the appliance extends 1 7/8" from the cabinet front.

The outer edge of the door handle extends 3 11/16" from the cabinet front.

When planning a corner solution, pay attention to the 90° door opening angle.

Consider the overhang, incl. the door handle, when planning to open drawers next to the appliance.

Plan a gap of at least 3/16" between the appliance and adjacent cabinets.

To achieve the 21 5/8" installation depth, the connecting cable needs to follow the slanted edge on the lower right hand corner of the housing. The plug needs to be planned outside of the cut-out.

When installing two ovens side by side, the handles of the two appliances need to be in the middle.

A minimum clearance of 3/8" between the two doors is required.


Rating

Total rating: 3.7 kW.

Total Amps: 16

208/220-240V / 60Hz

Plan for a connecting cable.

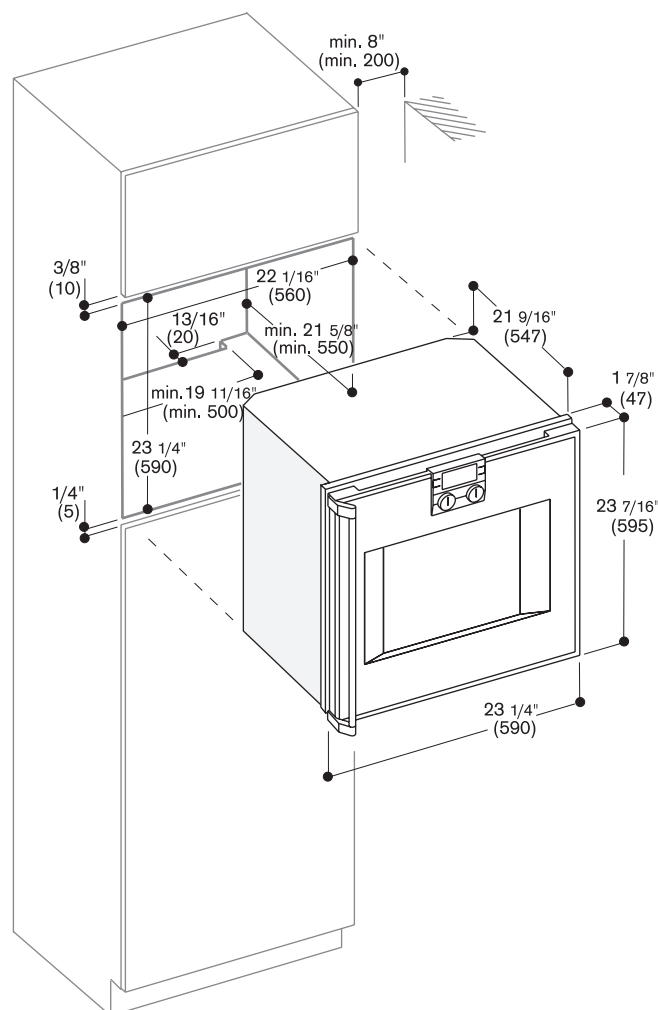

Numbers indicated inside parenthesis () = mm