



VG 295 114CA

Stainless steel control panel

Propane gas

Width 36" (90 cm)

VG 295 214CA

Stainless steel control panel

Natural gas

Width 36" (90 cm)

Optional accessories

WP 400 001

Wok pan made of multiple-layered material, with round bottom and handle, ø 14 3/16". 5.3 quarts., height 3 19/16".

200 series gas cooktop

VG 295

All-gas cooktop for natural or propane gas.

- Sturdy stainless steel, solid smooth-surface cast-iron pan support and top control panel. Top performance also in the 200 series.
- 58,000 BTU on five burners including wok burner. Professional cooking for large numbers of guests.
- Convenient operation with automatic quick ignition.

Cooking zones

5 brass gas burners:
2 two-ring super-high output burners (150–4,000 W) 500–13,600 BTU, suitable for pots up to max. ø 11".
2 two-ring standard burners (150–2,000 W) 500–6,800 BTU, suitable for pots up to max. ø 9 1/2".
1 three-ring super-high output burner (300–5,000 W) 1,000–17,000 BTU, suitable for pots up to max. ø 12 5/8".
Ideal burner configuration, electronics and a broad output spectrum.

Features

Three-part cast-iron pan support with a flat, continuous surface.
Operation control indicator lights.
Gas valve with fine control.
Integrated control panel with cooking zone and power marking.

Safety

Automatic quick ignition.
Electronic flame recognition (ionization principle) with automatic re-ignition.

Planning notes

Installation in a 36" (90 cm) base cabinet.
Air admission from above.
No intermediate shelf required.
The gas cooktop is equipped with a 55" connecting cable and a grounded plug.
The appliance must be set up and connected in accordance with the applicable installation specifications.
A ventilation hood must be switched on during operation of the gas cooktop. The rear panel must consist of a non-flammable material.
Wall trims must be heat-resistant.
A minimum clearance of 12" from adjacent heat-sensitive wooden side panels must be observed or thermal insulation must be installed.
Distance between a ventilation and the gas cooktop should be between 30" and 36".
When installing this cooktop next to another appliance of the Vario Series 200, a minimum clearance of 2" between the single cut-outs should be observed.
Cooktop clamping range: 1 13/16" – 2".
Can be installed above an EB 388 oven with 1/2" minimum distance.
The appliance is not operable without electrical connection.



Rating

Total rating: 58,000 BTU

Total Amps: 1

120V / 60Hz

Gas connection

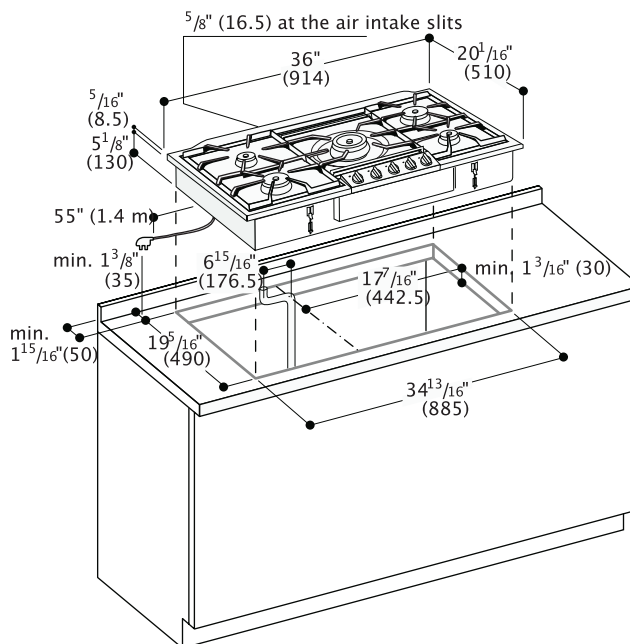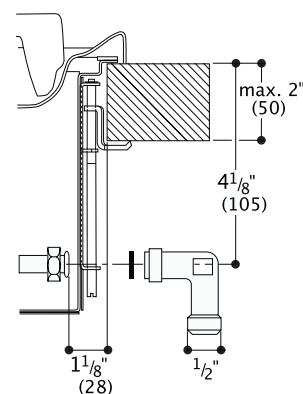

Numbers indicated inside parenthesis () = mm