



VC 422 610

Stainless steel frame

Width 15" (38 cm)

Optional accessories

VD 400 000

Stainless steel cover

VV 400 000

Connecting strip for combination with other Vario cooktops

(not when using a downdraft).

VZ 400 700

Connecting strip with timer offers the automatic cooking time function for two appliances or cooking zones

Also, independent short-period alarm timer.

400 series Vario electric cooktop VC 422

- Special appliance for restaurant-grade capabilities in the home kitchen. Individually combined for a consistent stainless steel look.
- Two cooking zones including combination. Output up to 4,400 W.
- Great versatility on a small surface.

Cooking zones

Two cooking zones:

1 Super-Quick cooking zone
ø 7 1/16" (1,500 W), converts to
ø 9 1/16" (2,400 W).

1 Super-Quick cooking zone
ø 5 11/16" (1,100 W), converts
to 5 11/16" x 9 7/16" roasting zone
(2,000 W).

Features

Electronic control in 12 output levels.

Cooking zone marking.

Two control knobs with illuminous dials showing cooking position and setting.

Safety

Combination indication.

Individual residual heat display.

Safety lock.

Planning notes

Order cover and connecting strips separately.

Built-in control box is fitted in base cabinet at drawer level.

Panel thickness: 5/8" - 1".

Dimensions listed in cut-out drawing include spaces for connecting strips.

The VC 422 610 does not come with an attached cable (hardwire required).

Clamping range: 1 3/16" - 2" cooktop fixings.

Rating

Total rating: 4.4 kW




Total Amps: 19

220-240V / 60Hz

Front panel thickness 5/8" - 1".

The sketch below must be observed if the panel is more than 1" thick (there must be a recess at the rear for proper control module installation).

Installation of the control knob

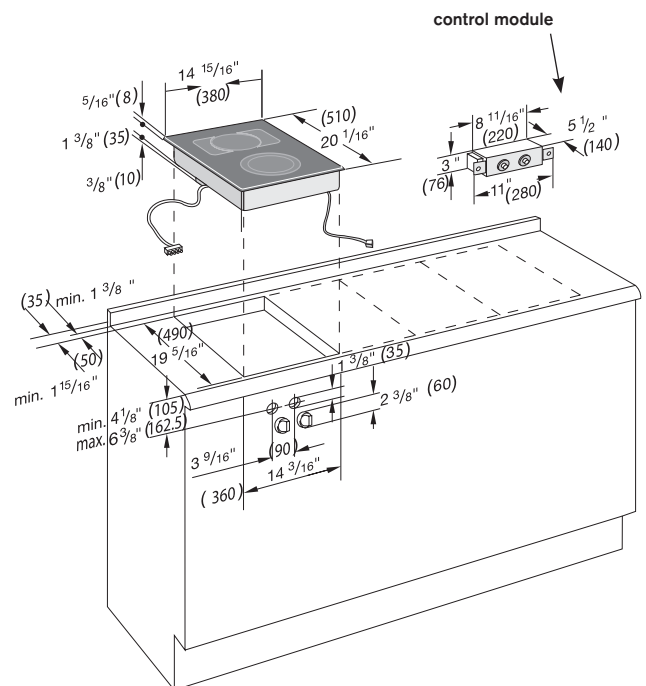

Numbers indicated
inside parenthesis () = mm