



#### AH 900 761

Stainless steel handle strip  
Air extraction/recirculation  
Width 24" (60 cm)

#### AH 900 791

Stainless steel handle strip  
Air extraction/recirculation  
Width 36" (90 cm)

#### Optional accessories

##### KF 900 055

Activated charcoal filter for

##### AH 900 761

##### KF 900 090

Activated charcoal filter for

##### AH 900 791

##### FF 900 056

Metal filter for AH 900 761.

##### FF 900 091

Metal filter for AH 900 791.

##### LL 010 000

Air deflector

#### Visor hood

#### AH 900

- Technology concealed. Design revealed.
- Top performance and low noise output. Easy change of filter.
- Eight-key operation. Direct access to all functions.

Metal grease filter (dishwasher-safe). 7-inch pull-out steam visor. Front operation; handle strip not replaceable.

Bright cooking area illumination by compact fluorescent lamp. 1 x 36 watt in the case of AH 900 761/2 x 24 watt in the case of AH 900 791.

#### Output

Unobstructed air flow:  
390 CFM with  $\varnothing$  6".

Sound pressure level:

Exhaust air: 54 dB (re 1 pW).

Recirculating air: 64 dB (re 1 pW).

#### Features

Three electronically controlled speeds plus intensive mode. Delayed shut-off function (power level can be chosen). Special function: interval ventilation. Light can be switched on separately. Grease filter saturation display indication by flashing light. Cartridge-type filter, dishwasher-safe

#### Planning notes

Weight: AH 900 761 = 36 lbs.

AH 900 791 = 44 lbs.

Minimum clearance 30" above gas appliances, 27 1/2" above electric appliances.

To be installed in an upper cabinet without base and without front frame (hood slides into side brackets from the front).

Front panel of pull-out visor is not removable.

Plan electrical connection behind the extension flue.

The door of the cabinet must be completely open to change the filter.

#### Rating

Total ratings:


AH 900 761: 230 W

Total Amps: 2

AH 900 791: 240 W

Amps: 2.2

120V / 60Hz

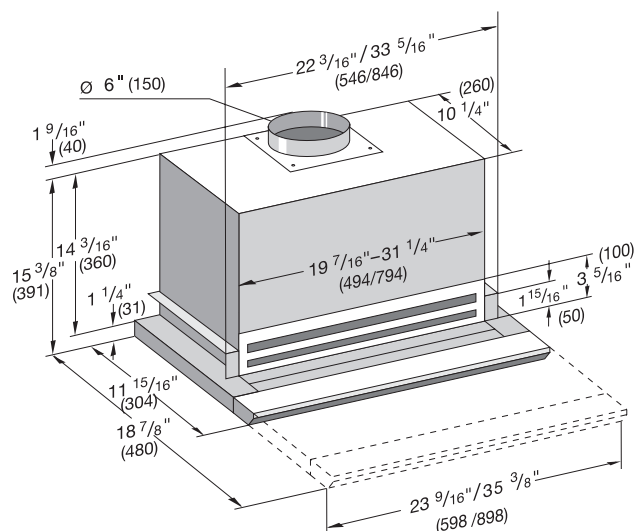

Numbers indicated  
inside parenthesis ( ) = mm