



RB 491 700

Two-door bottom freezer
with integrated ice maker

Fully integrated
Width: 36"

RY 491 701

Three-door bottom freezer
with integrated ice maker

Fully integrated
Width: 36"

Included accessory

1 ice scoop

Installation accessories

RA 460 000

Installation kit for side-by-side
installation (for connecting any
two columns)

RA 460 010

Heating kit if columns are not
attached and less than 6" apart

RA 460 030

Connecting element for vertically
split appliance fronts (for two-door
bottom freezer combination)

Optional accessories

RA 035 030

Aluminum bottle cooler

RA 421 910

Stainless steel door panel
with handles for RB 491
Panel thickness 3/4".

RA 421 912

Stainless steel door
panel with handles for RY 491
Panel thickness 3/4".

RA 421 930

Aluminum door
panel with handles for RB 491
Panel thickness 3/4".

RA 421 932

Aluminum door
panel with handles for RY 491
Panel thickness 3/4".

RA 461 910

Ventilation grill
Stainless steel for RB 491
and RY 491.

RA 423 910

Cladding set in stainless steel
Transforms RB/RY 491 into
free-standing unit. Door panels
and toe-kicks must be ordered
separately.

(W 37 13/16" / H 84 5/8" /
D 24 13/16")

Bottom freezer

RB 491/RY 491

- Fully integrated appliances.
Doors open to a 115-degree
angle, so that the large drawers
can be pulled out completely.
- One asymmetrically split shelf
and one motorized glass
shelf to make best use of the
refrigerator's interior space.
- Integrated automatic ice maker
in the freezer drawer.

Niche height 84".

Niche width 36"

Net volume 19.6 cu.ft.

Technical features

Electronic precision temperature
control with digital temperature
display. Dynamic cool air distribu-
tion with Multi-Flow Air System.
Activated charcoal filter.
Automatic defrosting.
Open-door and malfunction
warning system.

Cooling compartment

Net volume 14.3 cu.ft.

No-frost technology with
fast cooling.

Temperature adjustable
from 35° to 46°F.

Two continuous safety glass
shelves with aluminum profiles,
one of which is motorized.
Asymmetrically split shelf,
manually adjustable.

One continuous, fully extendable
drawer with transparent front.

Two fully extendable drawers with
transparent front.

Bright interior lighting with two
ceiling spotlights and two halogen
light pillars on the side.

Solid aluminum door bins.

One large gallon bin per door.

Two height-adjustable bins
per door.

One bin with front flap per door.

New TCD drawer.

Freezer compartment

Net volume 5.4 cu.ft.

No-frost technology with
fast freezing.

Temperature adjustable
from 7° to -9°F.

Two fully extendable drawers.

Interior lighting with two
spot lights.

Ice dispenser

Integrated automatic ice maker
in the freezer compartment,
with ice bin.

Ice making capacity approx.
3.8 lbs./24 hrs.

Supply at normal operation
approx. 8.8 lbs.

Ice maker can be switched
off independently.

Planning notes

Flat hinge.

Door hinges on the right,
reversible (for RB 491 700).

Plan the power outlet and water
connection behind the appliance
per installation instruction.

Total rating: 5.88 kW.

Water connection.

Connecting cable length 78".

Supply hose length 118".


Total Amps: 15

120V / 60Hz


Energy consumption

1.15/1.31 kWh/24 hrs.

RB 491-700

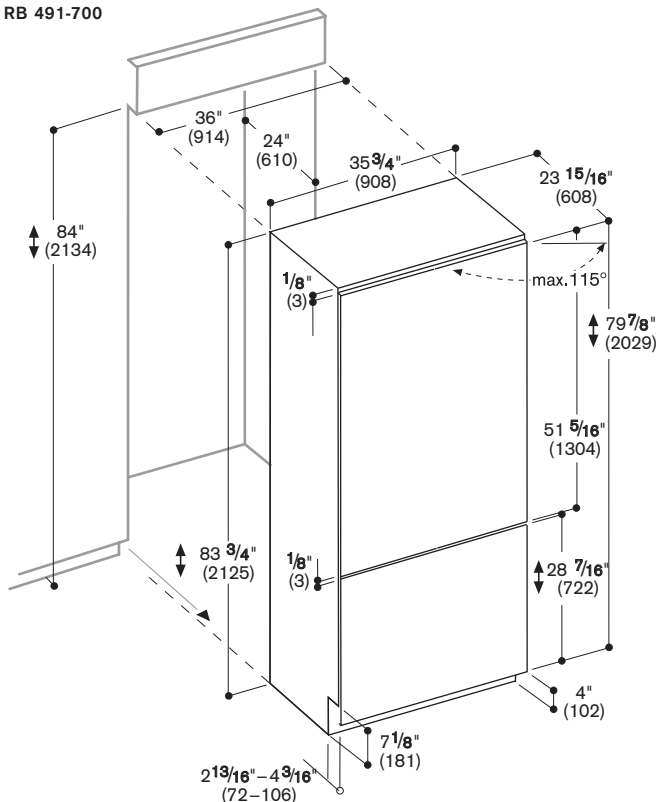

RY 491-701

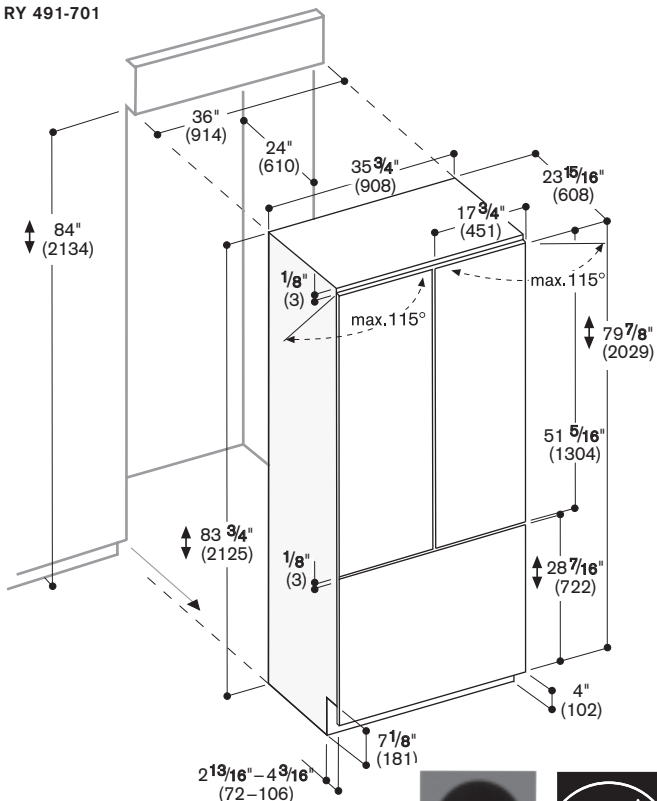

Numbers indicated
inside parenthesis () = mm

