

## Profile / Balance GlasBac® Tile

Style#: 13811

Color#: 5966

Carpet Type: Tile

Standard Size: 50 cm x 50 cm (19.69 in x 19.69 in)




Backing Options: GlasBac® RE Tile (50 cm x 50 cm), GlasBac® Tile (50 cm x 50 cm)

Layout Options:



NON-DIRECTIONAL

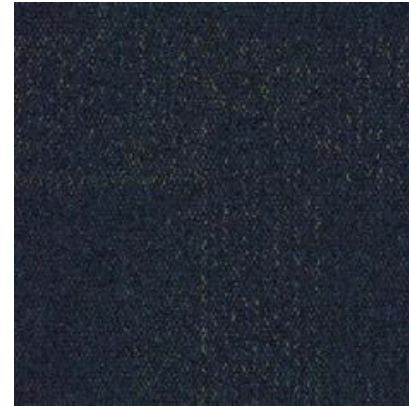

### Specifications for GlasBac® Tile


<b>Product Number:</b>	138115966
<b>Product Construction:</b>	Tufted Textured Loop
<b>Soil/Stain Protection:</b>	Protekt®
<b>Antimicrobial Treatment:</b>	(AATCC 138 Washed) (AATCC 174 Parts 2&3) Intersept®
<b>Yarn System:</b>	Post-Consumer Content Type 6 Nylon
<b>Yarn Manufacturer:</b>	Aquafil
<b>Dye Method:</b>	100% Solution Dye
<b>Post-Industrial:</b>	56% - 56%
<b>Post-Consumer:</b>	4%
<b>Total Recycled Content:</b>	60% - 60%

Product Specifications	U.S.	Metric
<b>Tufted Yarn Weight:</b>	18 oz/yd <sup>2</sup>	610 g/m <sup>2</sup>
<b>Machine Gauge:</b>	1/12 in	47.2 ends/10 cm
<b>Pile Height:</b>	.12 in	3 mm
<b>Pile Thickness:</b>	.116	2.9
<b>Stitches:</b>	8.33/in	32.79521 ends/10cm
<b>Pile Density:</b>	5586	
<b>Size:</b>	19.69 in x 19.69 in	50 cm x 50 cm

### Performance Specifications

<b>Indoor Air Quality:</b>	Green Label Plus Certified # <a href="#">GLP0820</a>
<b>Sustainable Carpet Assessment Standard:</b>	NSF-140 Gold
<b>Radiant Panel:</b>	(ASTM E-648) Class 1
<b>Smoke Density:</b>	(ASTM E - 662)
<b>Lightfastness:</b>	(AATCC 16 - E)
<b>Static:</b>	(AATCC - 134) < 3.0 KV


### Other Colors for Profile



Composition  
Color#: 5967




Vertical  
Color#: 5968



Horizontal  
Color#: 5969



Depth  
Color#: 5970



Concept  
Color#: 5971



Supports  
Color#: 5972



Length  
Color#: 5973



Width  
Color#: 5974




Dimension  
Color#: 5975




Height  
Color#: 5976




Diagonal  
Color#: 5977



Construction  
Color#: 5978



Movement  
Color#: 5979



Purpose  
Color#: 5980

All Product Specifications are averages derived from product sample testing and are subject to normal manufacturing tolerances and testing tolerances. "Tufted Yarn Weight" refers to total input weight of yarn used in tufting process, and processes such as tufting and shearing will result in a lower finished yarn weight in purchased carpet. Pile Density stated in the Product Specifications is based on the Tufted Yarn Weight. Product Specifications may be changed without notice as long as product performance is not materially affected.