

06137 CIRCA
06138 CIRCO

gradations


SERIES II

Geomatrix

 **Tandus**
FLOORING




Circo 47010 Surface
Horizontal Ashlar Installation

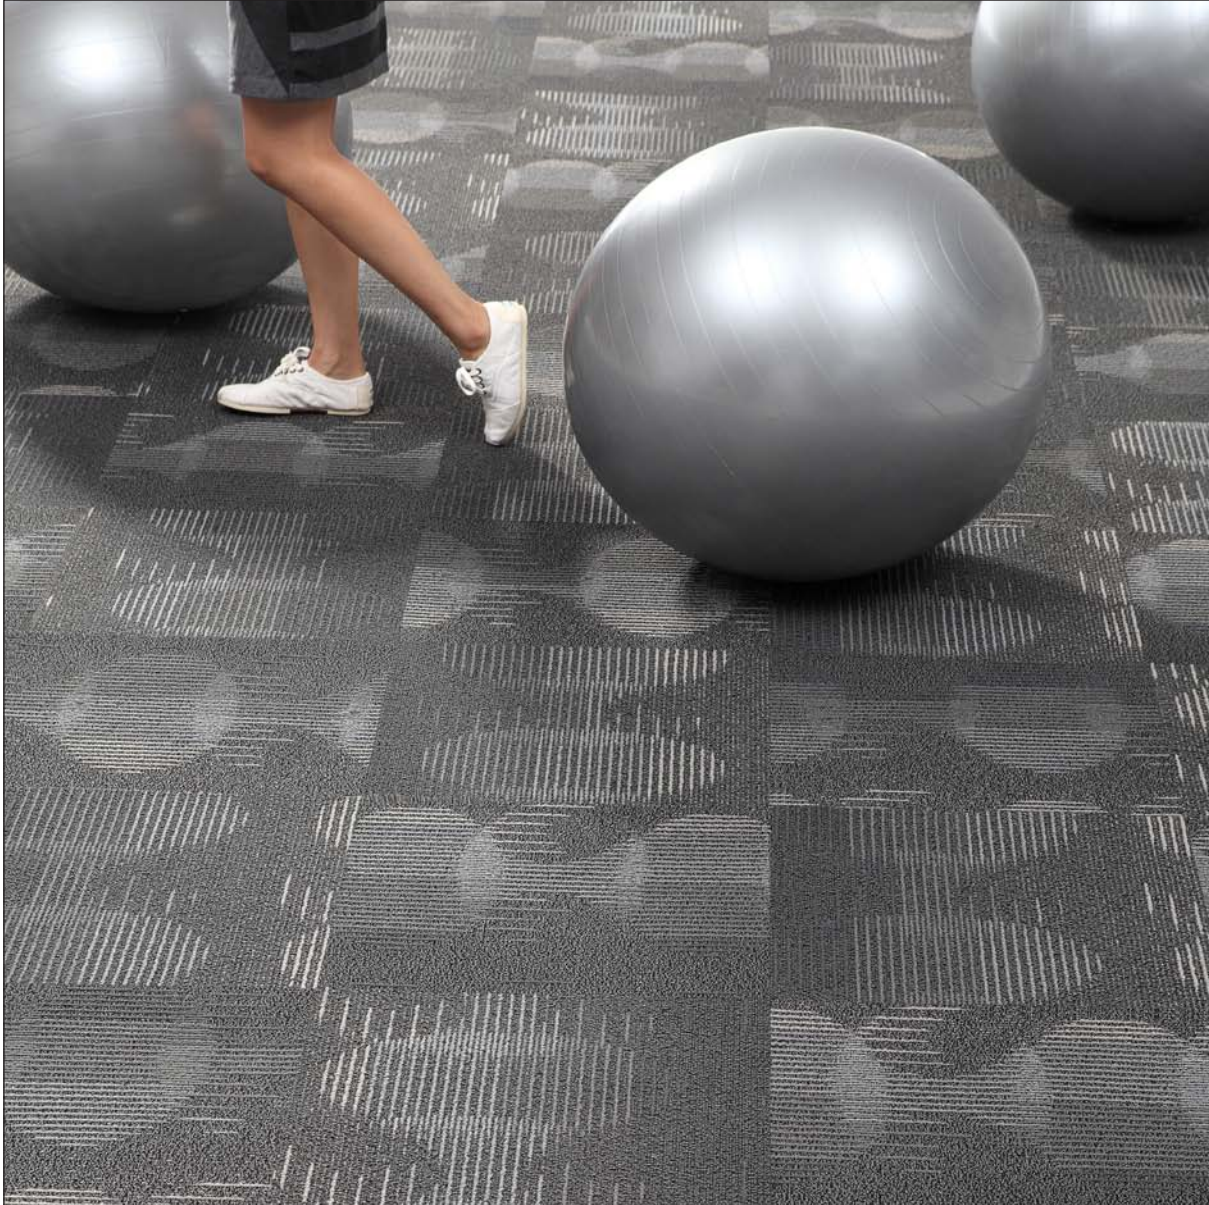

 **Tandus**
FLOORING

**Circa 46010 Surface
Quarter Turn Installation**

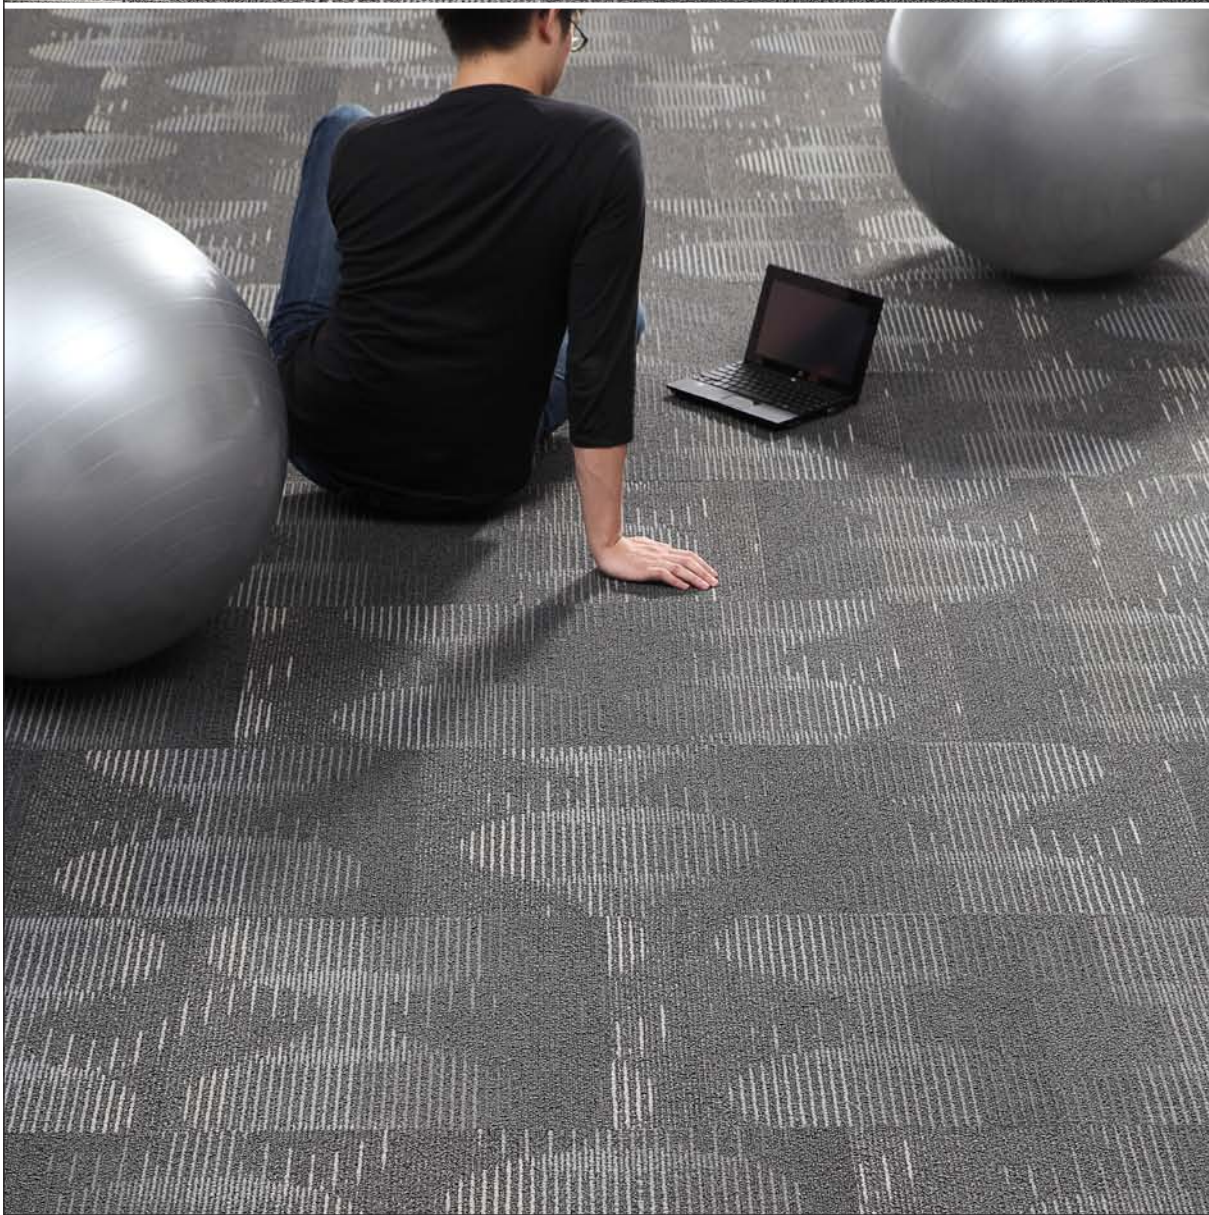


**Circa 46010 Surface
Horizontal Ashlar Installation**



 **Tandus**
FLOORING

**Circa 46010 Surface with
Circo 47010 Surface
Quarter Turn Installation**

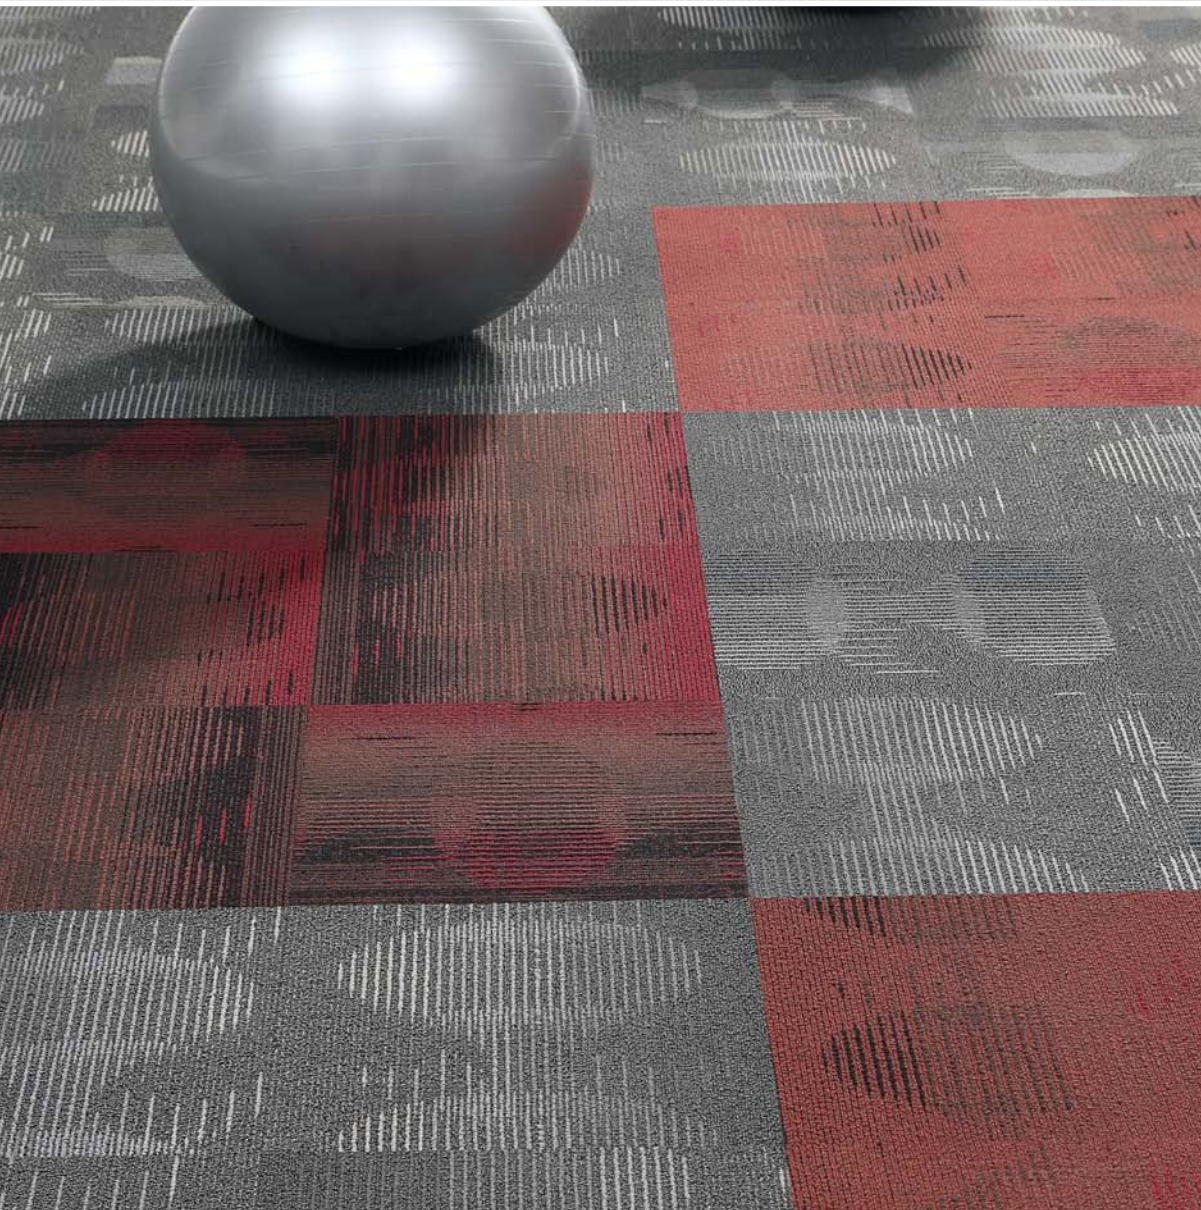


**Circa 46010 Surface,
Circa 46006 Vector
and Circo 47006 Vector
Custom Installation**

06137 CIRCA
06138 CIRCO


Circa and Circo are studies of circles that evolve into elliptical shapes that overlap.




Circa 46001 Volume

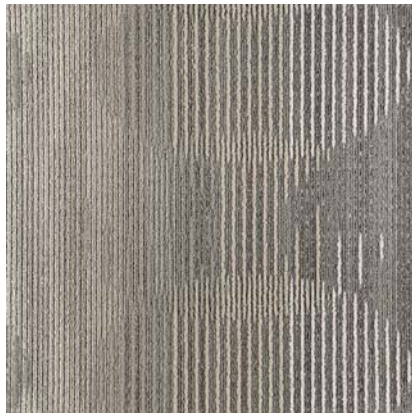

Circo 47001 Volume

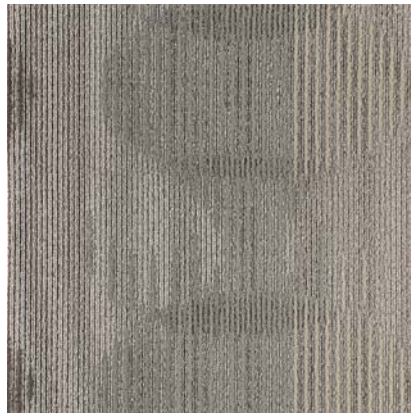

Circa 46002 Area

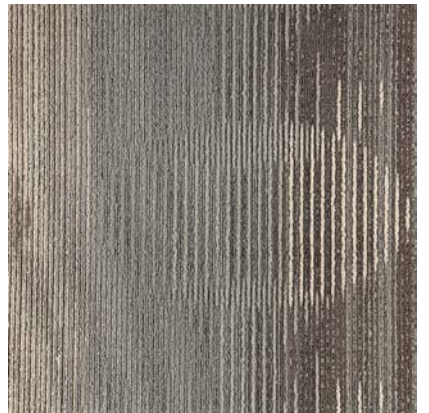


Circo 47002 Area



Circa 46003 Length



Circo 47003 Length

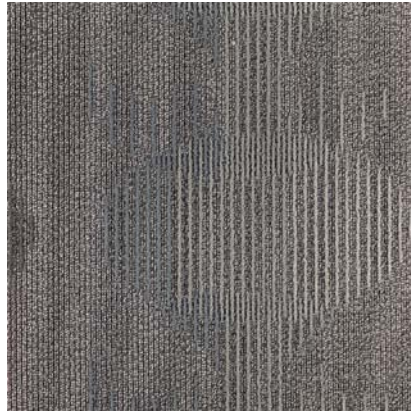


Circa 46004 Space




Circo 47004 Space



Circa 46005 Dimensions

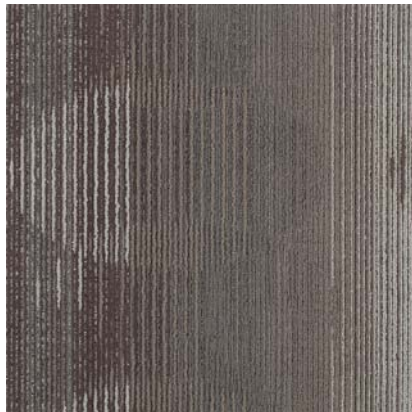

Circo 47005 Dimensions

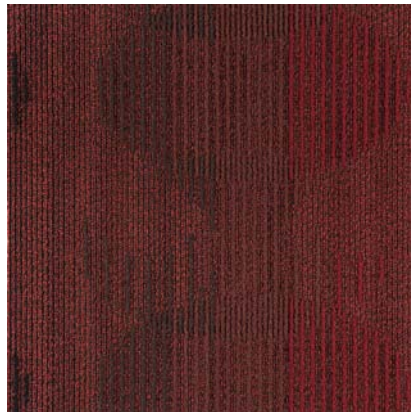

Circa 46006 Vector




Circo 47006 Vector

Coordinates: Wildflower Tones, Wildflower Accents

06137 CIRCA
06138 CIRCO




Circa 46007 Measure

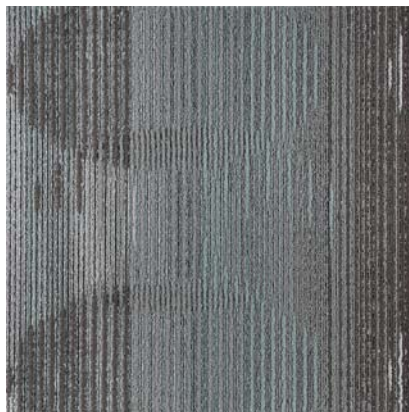

Circo 47007 Measure




Circa 46008 Distance

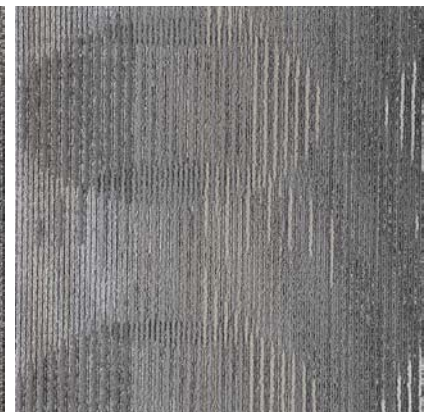


Circo 47008 Distance




Circa 46009 Units

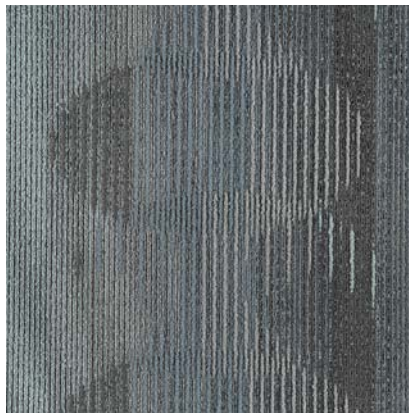

Circo 47009 Units

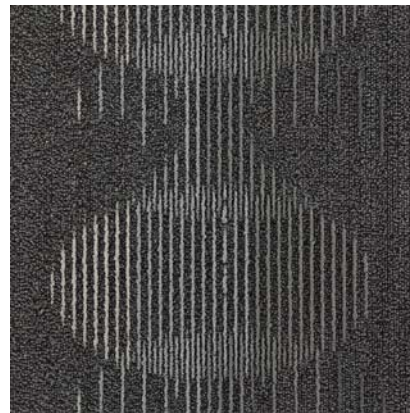


Circa 46010 Surface

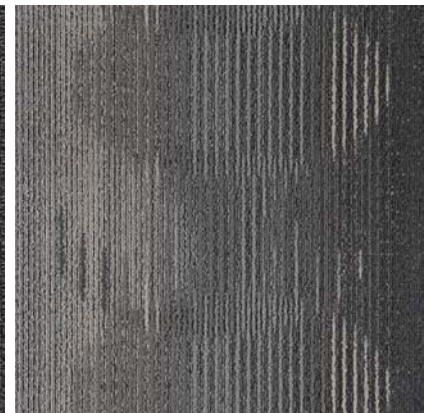


Circo 47010 Surface


Installation Instructions:




Horizontal Ashlar



Quarter Turn



Non-directional



Random

Coordinates: Wildflower Tones, Wildflower Accents

06137 CIRCA
06138 CIRCO



PRODUCT INFORMATION

Product Size	500 mm x 500 mm (19.7" x 19.7")
Construction	Patterned Loop
Gauge	1/12 (47.2 rows/10 cm)
Fiber System	100% Invista™ SD Nylon
Density Factor	6,300 oz/yd ³ UM44D
Dye Method	Solution Dyed
Total Product Weight	4,040 g/m ² ± 5%
Pile Height Average	2.8 mm ASTM D-418
Soil Resistance	ENSURE
Indoor Air Quality	All Tandus products comply with CRI Green Label Plus Standards ID: #GLP5288. Passes GB 18587-2201
Backing	ECOBOND™ Recycled Content Backing
Recycled Content	Contains approx. 32% overall recycled content including a min.30% post-consumer content.
Surface Flammability	Passes CPSC FF 1-70 ASTM D-2859
Flooring Radiant Panel	Class I (Mean average CRF: 0.45 watts/cm ² or higher) ASTM E-648
Electrostatic Propensity	3.0 kV or lower AATCC 134
Colourfastness to Light	≥4 after 100 hours AATCC 16E
Fluorine	Minimum 500 ppm - Minimum 400 ppm after two hot water extractions CRI TM-102
Recycling:	[CERTIFIED] All vinyl products, when recovered, are 100% recyclable



PRODUCT NOTES:

1. Product specifications are derived from averages resulting from normal manufacturing tolerances in yarn, fiber, temperature, humidity and colour. Product specifications may vary within normal industry and standardised testing tolerances.
2. These specifications reflect mean averages based upon tests of production runs of this carpet style by independent laboratories. A range of variances is implicit in the testing process. Furthermore, the standard test methods established to derive the specifications lack a degree of precision and repeatability; therefore, individual test results on the actual carpet purchased may differ from the specifications above.
3. Colours may vary slightly from dye lot to dye lot.
4. Backing or other materials may be changed without prior notice when shortages occur or when technological advancements become available which provide for improvement of the product's performance.
5. All ECOBOND™ products are 100% recyclable .

WARRANTY

Limited 15 years non-prorated surface wear, static, delamination, edge ravel, zipping and backing resiliency loss. See warranty for details.
Contact the Tandus Representative nearest you for detailed specifications, limited warranty and sample requests.