



Dia SY EN - 27.11.2009 - www.vs-furniture.com

SYSTEM INFORMATION

Dialog Dialogue workplaces.

Modular system consists of a table top with middle cross-member, supported by a pedestal and a leg in various configurations. Individual workplaces at either sitting or standing height are thus created.

Supporting leg (bow-shaped and cheek) of powder-coated tubular steel and perforated-metal respectively, each with castors. Supporting pedestal (Cubic pedestal). Steel skeleton construction clad with melamine-resin laminated LIGNOpal chipboard. The steel frame with integrated rows of holes allows the torsion and wear free acceptance of drawers and suspension files.

The body is fitted with a pivoted joint that can be freely positioned on the cross-member. Fitted with either castors or glides. Electrification is located in the cable storage compartment at the rear of the body which is easily accessible through a lockable perforated-metal door. Cable exit via 3 holes with aluminium inserts.

Table heights are fixed at either 72 cm for sitting or 107 cm for standing.

Table top of a melamine-resin laminated or veneered LIGNOpal chipboard with glued-on (KU) plastic or (BU) beech edges. **Monitor shelves** are positioned in the cable outlet of the supporting pedestal.

Table tops are either oval or freely shaped elements.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: TH-37-Turn.





Dia-Oval_TY_EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Oval table tops.

Modular system consists of a table top with middle cross-member, supported by a pedestal and leg in various configurations. Individual workplaces at either sitting or standing height are thus created. The connection to the supporting pedestal is via a pivoted joint.

Table top (oval) of either a melamine-resin laminated or beech veneered LIGNOpal chipboard with glued-on (KU) plastic or (BU) beech edges.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: Sit-at terminal 1664, sit-at bow-shaped leg 1642, monitor station 1650, PantoMove-2K.

Dialog		1621	1622	1623	1624		
Dialog	W·d			1623			
Dialog		1621		1623	1624 200·100		







Dia-Rund_TY_EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION


Dialog Round an

Round and triangular table tops.

Modular system consists of a table top with middle cross-member, supported by a pedestal and leg in various configurations. Individual workplaces at either sitting or standing height are thus created. The connection to the supporting pedestal is via a pivoted joint.

Table top (round, triangular) of either a melamine-resin laminated or beech veneered LIGNOpal chipboard with glued-on (KU) plastic or (BU) beech edges.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: Stand-at terminal 1670, stand-at bow-shaped leg 1643, stand-at cheek 1641, monitor station 1650.

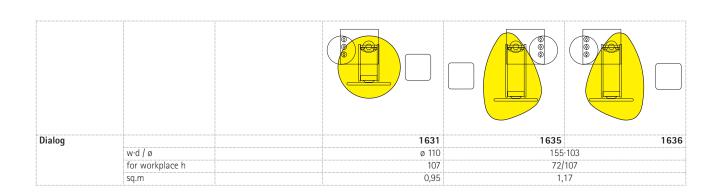









Dia-Sitz_TY_EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Sit-at terminal.

Modular system consists of a table top with middle cross-member, supported by a pedestal and leg in various configurations. Individual workplaces at either sitting or standing height are thus created.

Supporting pedestal (Cubic pedestal). Steel skeleton construction clad with melamine-resin laminated LIGNOpal chipboard. The steel frame with integrated rows of holes allows the torsion and wear free acceptance of drawers, suspension files and open equipment pull-out shelves.

The body is fitted with a pivoted joint that can be freely positioned on the cross-member. Fitted with either castors or glides with levelling screws.

The terminal can be used alone without attachment to the cross-member.

Electrification is located in the cable storage compartment at the rear of the body which is easily accessible through a lockable perforated-metal door. Cable exit via 3 holes with aluminium inserts.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: Sit-at terminal 1661, sit-at loop-shaped leg 1643, monitor-station 1650.

Dialog		1660	1661	1662	1663	1664	1665
	w·h·d	61-62-67					
	for workplace h	73					
	HE	1.5+3+6	1.5+3+3+3	1,5			
1	1115	1,01010	1,5757575		- 1	,5	
	document pull-out	1,01010	1,0707070	1		1	
		1,31310	1,0707070	1	1	1 1	2





Dia-Steh TY EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Stand-at terminal.

Modular system consists of a table top with middle cross-member, supported by a pedestal and leg in various configurations. Individual workplaces at either sitting or standing height are thus created.


Supporting pedestal (Cubic pedestal). Steel skeleton construction clad with melamine-resin laminated LIGNOpal chipboard. The steel frame with integrated rows of holes allows the torsion and wear free acceptance of drawers, suspension files and open equipment pull-out shelves.

The body is fitted with a pivoted joint that can be freely positioned on the cross-member. Fitted with either castors or glides with levelling screws.

The terminal can be used alone without attachment to the cross-member.

Electrification is located in the cable storage compartment at the rear of the body which is easily accessible through a lockable perforated-metal door. Cable exit via 3 holes with aluminium inserts.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: Stand-at terminal 1673, stand-at cheek 1641, monitor-station 1650.

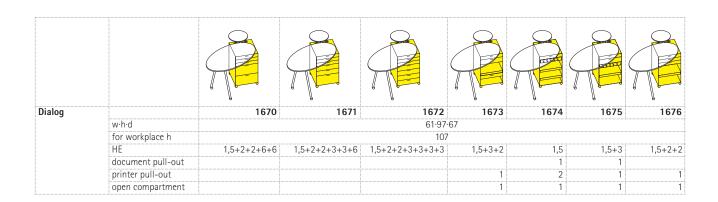





Dia-Train_TY_EN - 13.01.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Supervisor's place.

Modul–System consists of a table top with supporting frame and combinable supporting devices such as V-shaped leg, cheek and pedestal. The table top is attached to the pedestal with a pivot and is free to turn.

Supporting devices are leg and cheek of powder-coated round-steel tube and perforated-metal respectively, each in table height of 72 cm with double pivoted castors.


Pedestals have self-supporting steel frame and double pivoted castors or adjustable feet. Steel frame with integrated rows of holes to accept organisational units. Cable storage space with lockable hinged door of perforated-metal at the back. Body with 3 cable outlets.

Accessories and options. Turnable display unit station for insertion into the middle cable outlet.

Table top of melamine-resin laminated LIGNOpal chipboard with glued-on (BU) beech or (KU) plastic edges.

Following materials and colours are available: Frame: arctic, anthracite, black and mCr (mat chrome-plated). Table top: off-white and beech veneer H1. Body: L2. Front: L2.

Further models illustrated on this page: PC-Training, PantoMove-2K.

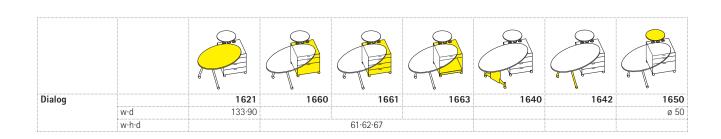







Dia-UGest_TY_EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Supporting devices.

Modular system consisting of a table top with middle cross-member, supported by a pedestal and leg in various configurations. Individual workplaces at either sitting or standing height are thus created.

Supporting devices (leg and cheek) of powder-coated tubular-steel and perforated-metal respectively, each with lockable castors.

Following materials are available: Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6. Further models illustrated on this page: Stand-at terminal 1670, stand-at bow-shaped leg 1643, stand-at cheek 1641, monitor station 1650.

Dialog		1640	1641	1642	1643
	frame ø	3,2		3,8	
	for workplace h	73	108	73	108





Dia-Zub_TY_EN - 27.11.2009 - www.vs-furniture.com

PRODUCT INFORMATION

Dialog Accessories.

Monitor station consists of a melamine-resin laminated LIGNOpal chipboard with glued-on (KU) plastic edges. The attachment to the Dialog terminal is via a tube with eccentric joint which is inserted into the cable outlet. **Quadruple power socket** with 3 m of cable (HO5W-F3G) and angled plug. With VDE test mark. **Following materials are available:** Frame = M2,5; Top LIGNOpal plastic/beech = L1,4,6,F1; Carcass/Front = L1,4,6.

