

Shelton, Mindel & Associates design



d1012




See also:

d5010



d8010

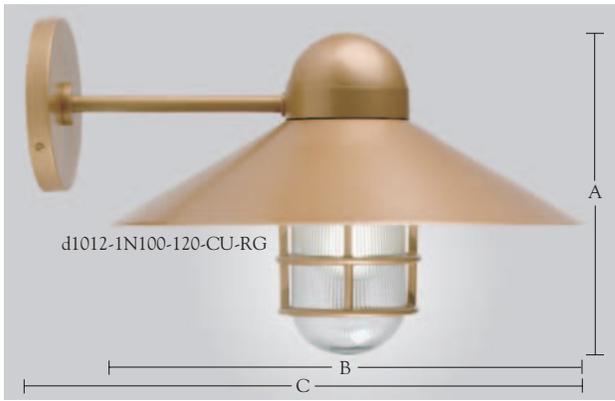


	A	B	C
d1012:	9 1/4"	14"	16"
d1018:	11 1/2"	17"	19 1/2"

Item #	Lamping	Voltage	Fixture Finish	Options	Sp. Orders
<input type="text"/>					

Work space for submittals

**How to specify**

Example from illustration at left

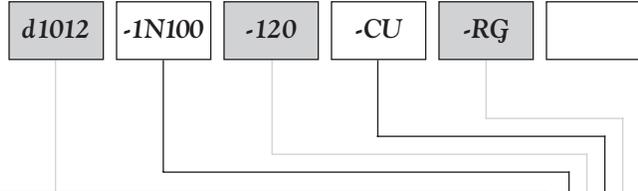

**Item Number** d1012  
d1018

SOFT INDUSTRIAL wall fixture w/shade  
SOFT INDUSTRIAL wall fixture - Large  
Shelton, Mindel & Associates design

**Construction**

Cast aluminum grill and fittings. Clear glass enclosure.  
5" diam. x 1/2" deep canopy. (Fluorescent versions enclose ballast in 5" diam. x 2" deep canopy.) For standard wall junction box mounting. UL listed, cUL certified for dry locations.

**Lamping / Wattage**

Fixtures supplied less lamps.  
Lamps may be ordered from d'ac.

- |               |  |
|---------------|--|
| <b>1N100</b>  | Incandescent, one 100 W, medium base, A type                     |
| <b>1N200*</b> | Incandescent, one 200 W, medium base, A type                     |
| <b>1FM13</b>  | Fluorescent, one 13 W quad, 2 pin, electromagnetic NPF ballast   |
| <b>1F13</b>   | Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast        |
| <b>1F18</b>   | Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast        |
| <b>1F26</b>   | Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast |
| <b>1F32</b>   | Fluorescent, one 32 W triple tube, 4 pin, electronic HPF ballast |
| <b>1F42*</b>  | Fluorescent, one 42 W triple tube, 4 pin, electronic HPF ballast |
| <b>1M70*</b>  | Metal Halide†, one 70 W, medium base, ED-17 type                 |
| <b>1M100*</b> | Metal Halide†, one 100 W, medium base, ED-17 type                |
| <b>1M150*</b> | Metal Halide†, one 150 W, medium base, ED-17 type                |

\*Available on d1018 only

†remote "F-can" magnetic type metal halide ballast not to exceed 10 feet from lamp

<b>Voltage</b>	120	120V	277	277V
----------------	-----	------	-----	------

**Fixture Finishes**

See Page d9000 for color renderings

- |                            |  |                           |
|----------------------------|--|---------------------------|
| <b>AL</b> Brushed Aluminum |  |                           |
| Baked Enamel Finishes:     |  |                           |
| <b>WH</b> White Gloss      | <b>G1</b> Light Grey                             | <b>G2</b> Medium Grey     |
| <b>MG</b> Metallic Grey    | <b>AN</b> Metallic Anthracite                    | <b>BG</b> Black Gloss     |
| <b>MB</b> Matte Black      | <b>BC</b> Black Crinkle                          | <b>CU</b> Metallic Copper |
| <b>BZ</b> Metallic Bronze  | <b>T1</b> Light Tan                              | <b>T2</b> Medium Tan      |
| <b>GM</b> Metallic Green   | <b>SF</b> Seafoam                                | <b>BL</b> Metallic Blue   |
| <b>RD</b> Metallic Red     | <b>RB</b> Bright Red                             | <b>MP</b> Magenta Pink    |
| <b>YL</b> Bright Yellow    | <b>SCF</b> Special Finish—must supply paint chip |                           |

**Options**

- |   |                                   |
|---|-----------------------------------|
| <b>RG</b> Ribbed Glass enclosure  | <b>PS</b> Perforated metal Sleeve |
| <b>WET</b> Wet location UL/cUL listed   |                                   |
| <b>SCF</b> Special/Custom Finish - customer must supply paint chip  |                                   |
| <b>ELTRN</b> Remote electronic metal halide ballast, 120 V (70 W & 100 W only)<br>Not to exceed 12 feet from lamp |                                   |

**Special Orders**

For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.