

d'ac studio design





d5030 Stadio (14" diam.) and
d5029 Mini-Stadio (9 1/2" diam.) pendants



d5029-1F26-120-CPL

d5029

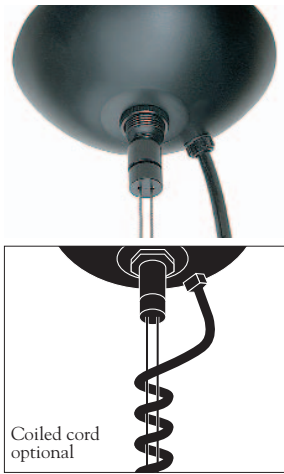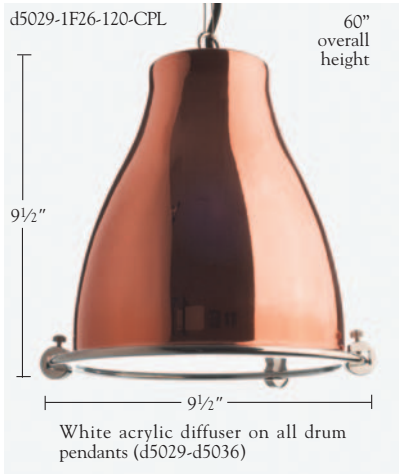

| Item # | Lamping | Voltage | Finish | Options | Sp. Orders |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

Work space for submittals

How to specify

Example from illustration at left

| | | | | | |
|-------|-------|------|------|----------------------|----------------------|
| d5029 | -1F26 | -120 | -CPL | <input type="text"/> | <input type="text"/> |
|-------|-------|------|------|----------------------|----------------------|

Item Number

d5029

MINI-STADIO pendant / d'ac studio design

Construction

Spun aluminum or solid copper (new) shade. Polished chrome trim, clamps and loop. White opal acrylic diffuser. 5" diam. black canopy. Adjustable height, aircraft cables support fixture. Black, 3 conductor cord. 60" overall height. For standard ceiling junction box mounting. UL listed, cUL certified for dry, damp and wet locations.

Lamping / Wattage

Fixtures supplied less lamps.

Lamps may be ordered from d'ac.

*Remote "F-can" magnetic metal halide ballasts not to exceed 15 feet from lamp.

1N75

1H60

1F13

1F18

1F26

1M39*

Incandescent, one 75 W, medium base, A type
 Halogen, one 60 W, medium base, double enclosed, T type
 Fluorescent, one 13 W quad, 4 pin, electronic HPF ballast
 Fluorescent, one 18 W quad, 4 pin, electronic HPF ballast
 Fluorescent, one 26 W triple tube, 4 pin, electronic HPF ballast
 Metal Halide, one 39 W, medium base, PAR20 30° flood

Voltage

120

120V

277

277V

Finishes

See Page d9000 and d9000A for color renderings

AL Brushed Aluminum

WH White Gloss

MG Metallic Grey

MB Matte Black

BZ Metallic Bronze

GM Metallic Green

RD Metallic Red

YL Bright Yellow

PA Polished Aluminum

G1 Light Grey

AN Metallic Anthracite

BC Black Crinkle

T1 Light Tan

SF Seafoam

RB Bright Red

SCF Special Finish—must supply paint chip

Baked Enamels:

G2 Medium Grey

BG Black Gloss

CU Metallic Copper

T2 Medium Tan

BL Metallic Blue

MP Magenta Pink

New: Solid copper shade: (also available on larger d5030 fixture)

CPL Polished Copper (*lacquered*)

CBL Brushed Copper (*lacquered*)

CPU Polished Copper (*unlacquered – will naturally tarnish over time*)

CBU Brushed Copper (*unlacquered – will naturally tarnish over time*)

Options

WET UL listed for wet and damp locations

STEM Rigid, 1/2" diam. stem (aircraft cable and cord replaced by 1/2" diam. rigid stem and modified canopy)

COIL Coiled electrical cord. (Not an option for metal halide.)

TR Fixture can be modified for use with track systems. (adapter & track supplied by others)

INCP Inner shade in raw copper vs. painted white (standard on fixture) for copper finishes.

Special Orders

For modifications to dimensions, electrical requirements and other special orders, please contact your d'ac representative.

