
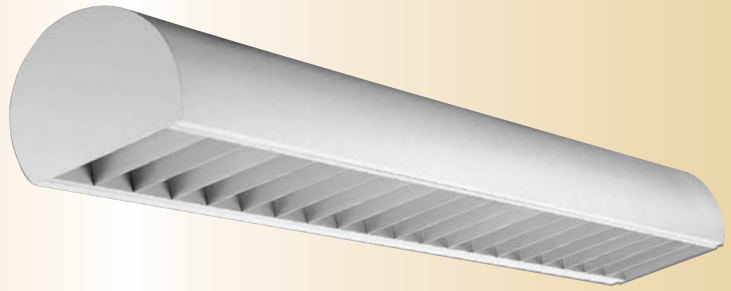


Rounds

AD-RO7-D

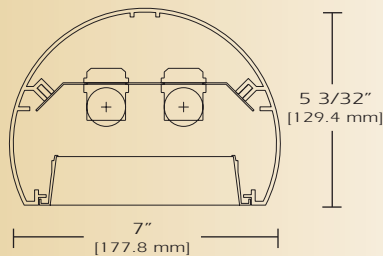

TYPE _____

FEATURES

The AD RO7 D series is a 7" round extruded aluminum luminaire with a round clear ribbed acrylic lens, round radial baffle or flush parabolic louver. The series can be suspended or wall mounted. These AD RO 7 D can be mounted individually, in perfectly aligned continuous rows, or in any combination of patterns. The AD RO 7 D is an excellent tool for general direct illumination as well as highlighting within the space.

SPECIFICATIONS

- Housing:** One piece heavy gauge extruded aluminum 6063T5 alloy welded construction forming a seven-inch round diameter profile. Finished end caps are welded with no exposed hardware or knockouts.
- Reflector:** Die formed 20-gauge cold rolled steel minimum 90% reflectivity finished in high gloss baked white enamel.
- Shielding:** Parabolic louver is semi-specular low iridescence aluminum 1 1/4" x 2.4" O.C. with 20 cells per 4' section. Four spring clips secure snap in baffle including two tethers.
- Electrical:** Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% total harmonic distortion. The minimum number of ballasts will be used unless otherwise specified.
- Mounting:** Standard installation is an adjustable self-locking aircraft assembly 48" x 3/32" in diameter with 5" canopy. One 1/4" SJT straight 54" cord is supplied with each power feed. Standard pendants are available in 24" lengths. See Accessories for additional mounting.
- Finish:** Fixture housing and steel components are finished in baked white enamel applied over a five-stage pretreatment process.
- Lamps:** Fixtures are provided for use with one or two 32 watt T8 lamps or 54 watt T5 HO lamps. (Supplied by Others)
- Certification:** Luminaires are U. L. Listed, C. S. A. certified and are Union Made in the United States of America I.B.E.W.

ORDERING GUIDE

MODEL NO.	DIRECTION	SHIELDING	LAMPS	MOUNTING	LENGTH	FINISH	VOLTAGE	OPTIONS
AD-RO7	D							
AD-RO7	D=Direct	ARL= Acrylic Ribbed Lens RAB= Radial Aluminum Baffle PBL= Parabolic Louver (Flush)	132T8 232T8 154T5 HO 254T5 HO	AC= Cable PD= Pendant WM= Wall Mount	4= 4 ft 8= 8 ft	W= White CC= Custom Color	120v 277v	See Options Below
					for other, please enter row length (eg. 48=48ft)			
					See Accessories			

Example: **AD-RO7-D-ARL-232T8-AC-4-W-120V**
 Example: AD-RO7 direct with acrylic ribbed lens for two 32 watt T8 lamps including two 48inch aircraft cables and power feed four foot fixture finished in baked white enamel 120v electronic ballast less than 20% total harmonic distortion.

OPTIONS

- E10=** Electronic ballast, high power factor, thermally protected class P, sound rated A, < 10% total harmonic distortion
- DIM=** Dimming Ballast
- EPC=** Emergency Battery Pack
- EMC=** Emergency Circuit
- TCW=** Two Circuit Wiring
- TDW=** Tandem Wiring
- OTH=** See Accessories for other options available

