


300 Series

A01 - Floor to Floor

A02 - Floor to Wall

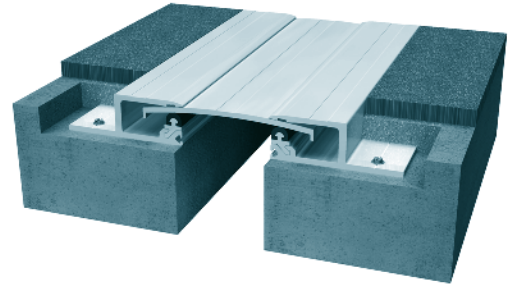

	Movement Rating $\pm$ 50%		
Product Guide			
	 Seismic	 Fire Rated Option	 Quick Ship AVAILABLE

- ▶ Glide plate allows for full seismic movement
- ▶ 3 Fully integrated floor, wall and ceiling systems
- ▶ Patented “no-bump” configuration. ADA compliant. (Patent No. 5384996)
- ▶ Gasketed to eliminate transition rattle
- ▶ Load rated
- ▶ Recessed frame accommodates many floor finishes including concrete, terrazzo, tile, VCT and carpet
- ▶ Integral vapor barrier option available
- ▶ $\pm$ 100% movement available on selected systems


SYSTEM DATA																	
Application	System	W		H1		H2		S		B		Movement +/-				Load	
		Joint Width		Frame Height 1		Height 2		Sight Line		Blockout		Horizontal		Vertical			
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm
Floor/Floor	300-A01-025	1"	25	1"	25	*	*	3 1/4"	83	2 3/4"	70	1/2"	13	1/4"	6	3.9	35
	300-A01-050	2"	51	1"	25	*	*	5 1/4"	133	3 1/4"	83	1"	25	1/2"	13	2.8	25
	300-A01-075	3"	76	1"	25	*	*	7 1/8"	181	3 3/4"	95	1 1/2"	38	3/4"	19	1.7	15
	300-A01-100	4"	102	1"	25	*	*	9 1/8"	232	4 1/4"	108	2"	51	1"	25	HP	HP
	300-A01-150	6"	152	1"	25	*	*	13 1/8"	333	5 1/4"	133	3"	76	1 1/2"	38	HP	HP
Floor/Wall	300-A02-025	1"	25	1"	25	*	*	2 1/8"	5	2 3/4"	70	1/8"	3	1/8"	3	3.9	35
	300-A02-050	2"	51	1"	25	*	*	3 5/8"	92	3 1/4"	83	3/8"	10	1/4"	6	2.8	25
	300-A02-075	3"	76	1"	25	*	*	5"	127	3 3/4"	95	9/16"	14	3/8"	10	1.7	15
	300-A02-100	4"	102	1"	25	*	*	6 5/8"	168	4 1/4"	108	3/4"	19	1/2"	13	HP	HP
	300-A02-150	6"	152	1"	25	*	*	9 1/2"	241	5 1/4"	133	1 1/4"	31	3/4"	19	HP	HP

Shear movement – unlimited. 100% movement available on selected models.


IPC.828/REV.5

300 Series Glide Plate Seismic Floor Systems

300-A01 Floor/Floor
(2" (50mm) system shown)

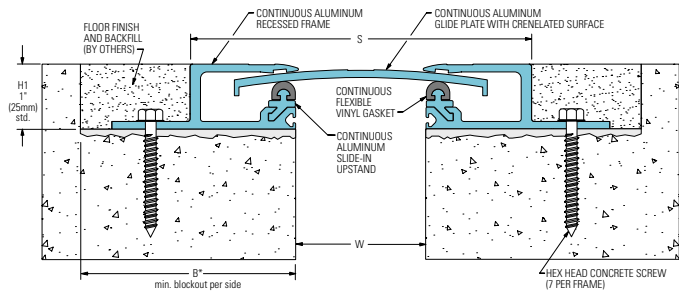


300-A02 Floor/Wall
(2" (50mm) system shown)

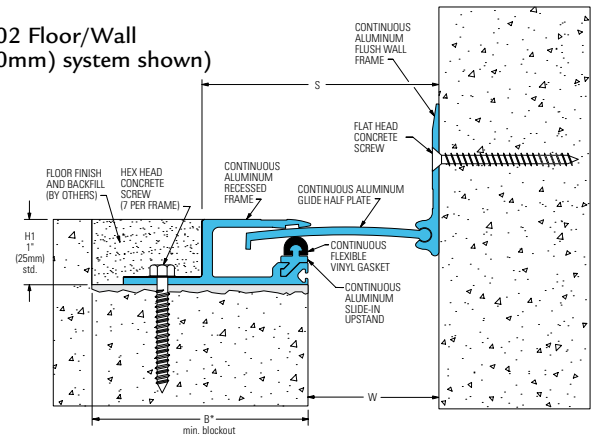

300 Series Options

Integral Vapor Barrier
(300-A01-050 system shown)

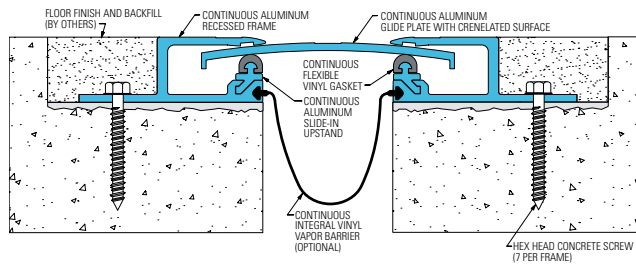

Reactofire Fire Blanket System
(300-A01-050 system shown)

