


312 Series

A01 - Floor to Floor

A02 - Floor to Wall

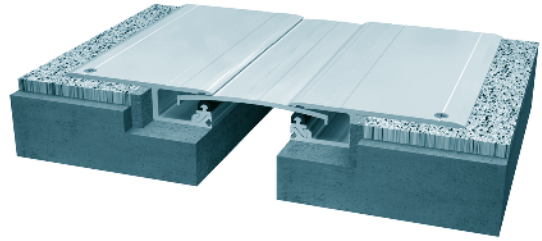

	Movement Rating $\pm$ 50%	
Product Guide		
	 Seismic	 Fire Rated Option

- ▶ Surface mount flanges ideal for retrofit applications
- ▶ Glide Plate allows for full seismic movement
- ▶ Gasketed to eliminate transition rattle
- ▶ Flange design keep fasteners away from edges
- ▶ Load rated
- ▶ Integral vapor barrier option available
- ▶ $\pm$ 100% movement available on selected models


Application	System	W		H1		H2		S		B		Movement +/-				Load	
		Joint Width		Frame Height 1		Height 2		Sight Line		Blockout		Horizontal		Vertical			
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US ton	kN
Floor/Floor	312-A01-050	2"	51	1"	25	*	*	10 1/8"	257	1 7/8"	48	1"	25	1/2"	13	2.8	25
	312-A01-100	4"	102	1"	25	*	*	14 1/8"	358	2 7/8"	73	2"	51	1"	25	HP	HP
Floor/Wall	312-A02-050	2"	51	1"	25	*	*	6"	152	1 7/8"	48	3/8"	10	1/4"	6	2.8	25
	312-A02-100	4"	102	1"	25	*	*	9"	229	2 7/8"	73	3/4"	19	1/2"	13	HP	HP

Shear movement – unlimited.


IPC.834/REV.4

312 Series Surface Mount Glide Plate Floor Systems

312-A01 Floor/Floor
(2" (50mm) system shown)

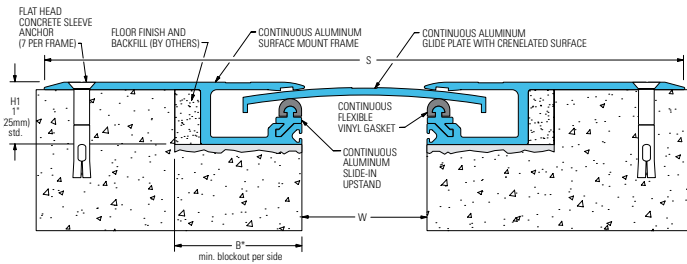


312-A02 Floor/Wall
(2" (50mm) system shown)

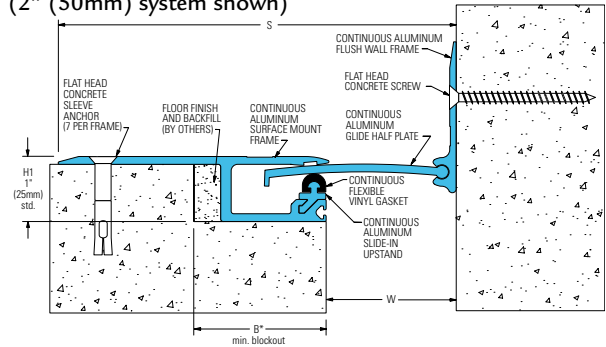

312 Series Options

Integral Vapor Barrier
(312-A01-050 system shown)

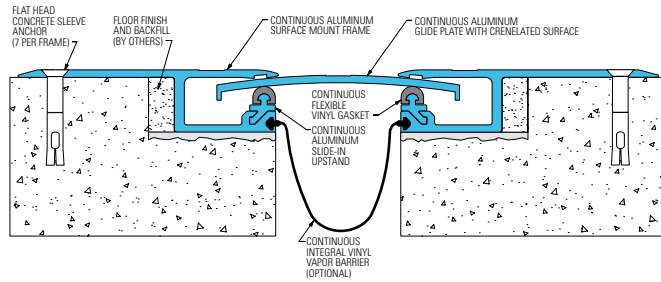

Reactofire Fire Blanket System
(312-A01-050 system shown)

