


316 Series

A01 - Floor to Floor

A02 - Floor to Wall

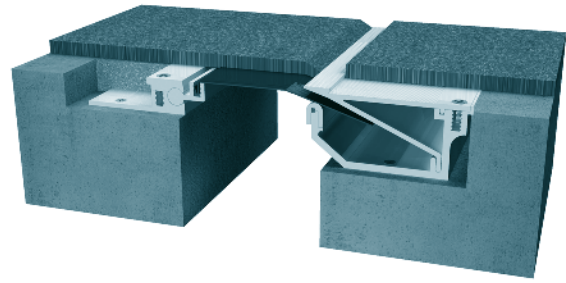

	Movement Rating $\pm$ 50%	
Product Guide		
	Seismic	Fire Rated Option

- ▶ Specially designed for carpeted floors
- ▶ Stainless steel leaf spring positions carpet accurately
- ▶ Single, narrow sightline preferred by interior designers
- ▶ ADA compliant
- ▶ Rated for high pedestrian loads, making the system ideal for heavy traffic areas

SYSTEM DATA


Application	System	W		H1		H2		S		B		Movement +/-				Load		Load	
		Joint Width		Frame Height 1		Height 2		Sight Line		Blockout		Horizontal		Vertical		US ton	kN	US ton	kN
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm				
Floor/Floor	316-A01-050	2"	51	2"	51	1"	25	3/4"	19	4 1/2"	114	3 1/2"	89	1"	25	1"	25	HP	HP
	316-A01-075	3"	76	2"	51	1"	25	3/4"	19	4 1/2"	114	3 1/2"	89	1 1/2"	38	1 1/2"	38	HP	HP
Floor/Wall	316-A02-050	2"	51	2"	51	1"	25	3/4"	19	4 1/2"	114	*	*	1/2"	13	1/2"	13	HP	HP
	316-A02-075	3"	76	2"	51	1"	25	3/4"	19	4 1/2"	114	*	*	3/4"	19	3/4"	19	HP	HP

Shear movement – unlimited.


IPC.837/REV.4

316 Series Single Sightline Seismic Floor Systems

**316-A01 Floor/Floor
(2" (50mm) system shown)**

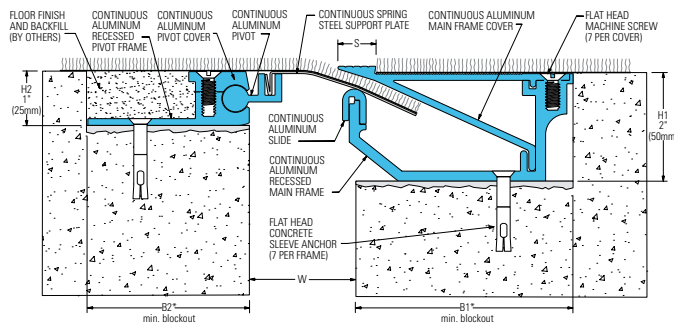


**316-A02 Floor/Wall
(2" (50mm) system shown)**

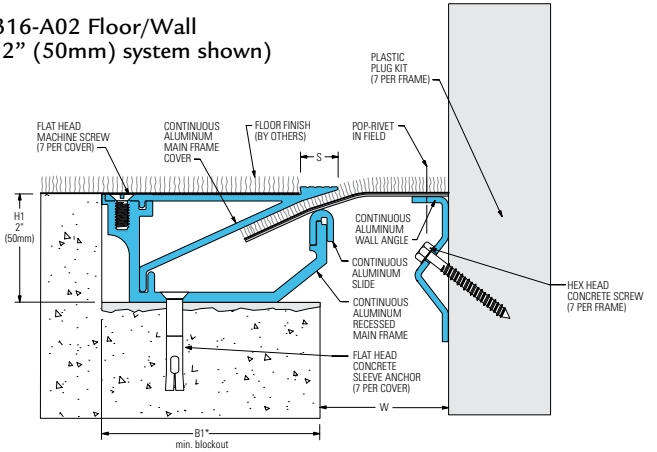


316 Series Options

**Wrap Around Vapor Barrier
(316-A01-050 system shown)**

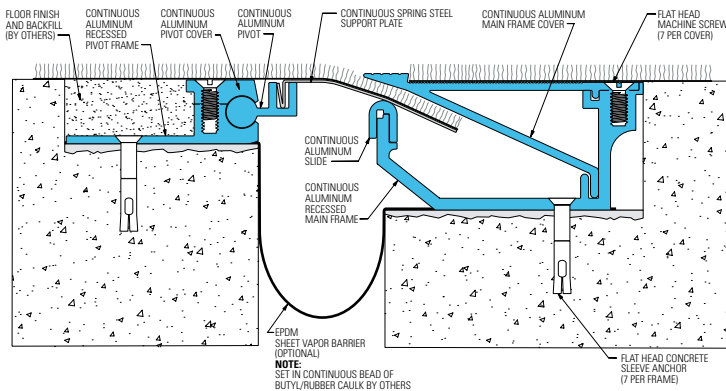

**Reactofire Fire Blanket System
(316-A01-050 system shown)**

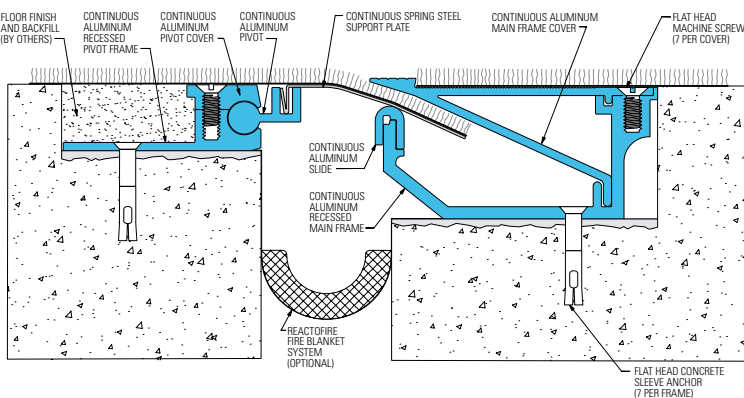

P.O. Box 406 · Muskego, Wisconsin 53150 USA

www.inprocorp.com

Nationwide **800.222.5556**/Fax 888.715.8407

International Sales **262.679.5521** / Fax 262.679.5524