


611, 615, 616 Series

A07 - Wall to Wall or Ceiling to Ceiling

A09 - Wall to Corner or Wall to Ceiling

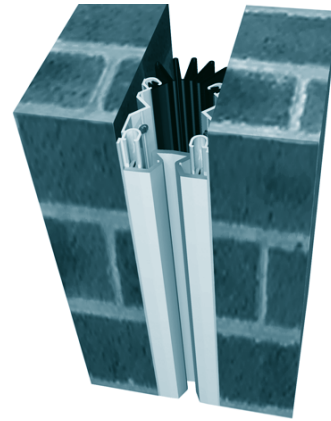

Movement Rating $\pm 25\%$	
Product Guide	 Seismic
	 Interior/Exterior
	 Fire Rated Option
	 Quick Ship Available

- ▶ Flush mount interior and exterior systems reduce sightline
- ▶ Santoprene® seals - Field heat weldable for weather tight transitions
- ▶ Standard seal colors: black, beige, gray, off white and bright white. Custom colors available upon request.
- ▶ **615 Series** - 4 component exterior system includes integral backseal
- ▶ **611 Series** systems do not include backseal
- ▶ Extra wide multi-plexed pantograph systems (616 System)
- ▶ Optional silicone seals available for custom applications and colors

SYSTEM DATA

Application	System	W Joint Width		H1 Frame Height 1		H2 Sub Height 2		S Sight Line		B Blockout		Movement +/-				Load	
												Horizontal		Vertical			
		US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US	mm	US ton	kN
Wall/Wall Ceiling/Ceiling	611-A07-050	2"	51	2 3/8"	60	*	*	2"	51	*	*	1"	25	1"	25	*	*
	611-A07-075	3"	76	2 3/8"	60	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38	*	*
	611-A07-100	4"	102	2 3/8"	60	*	*	4"	102	*	*	2"	51	2"	51	*	*
	611-A07-150	6"	152	2 3/8"	60	*	*	6"	152	*	*	3"	76	3"	76	*	*
Wall/Corner Wall/Ceiling	611-A09-050	2"	51	2 3/8"	60	*	*	2"	51	*	*	1"	25	1"	25	*	*
	611-A09-075	3"	76	2 3/8"	60	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38	*	*
	611-A09-100	4"	102	2 3/8"	60	*	*	4"	102	*	*	2"	51	2"	51	*	*
	611-A09-150	6"	152	2 3/8"	60	*	*	6"	152	*	*	3"	76	3"	76	*	*
Wall/Wall Ceiling/Ceiling	615-A07-050	2"	51	2 3/8"	60	*	*	2"	51	*	*	1"	25	1"	25	*	*
	615-A07-075	3"	76	2 3/8"	60	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38	*	*
	615-A07-100	4"	102	2 3/8"	60	*	*	4"	102	*	*	2"	51	2"	51	*	*
	615-A07-150	6"	152	2 3/8"	60	*	*	6"	152	*	*	3"	76	3"	76	*	*
Wall/Wall Ceiling/Ceiling	615-A09-050	2"	51	2 3/8"	60	*	*	2"	51	*	*	1"	25	1"	25	*	*
	615-A09-075	3"	76	2 3/8"	60	*	*	3"	76	*	*	1 1/2"	38	1 1/2"	38	*	*
	615-A09-100	4"	102	2 3/8"	60	*	*	4"	102	*	*	2"	51	2"	51	*	*
	615-A09-150	6"	152	2 3/8"	60	*	*	6"	152	*	*	3"	76	3"	76	*	*
Wall/Wall	616-A07-200	8"	200	3"	75	*	*	8"	200	*	*	4"	102	4"	102	*	*
	616-A07-250	10"	250	3"	75	*	*	10"	250	*	*	5"	127	5"	127	*	*
	616-A07-300	12"	300	3"	75	*	*	12"	300	*	*	6"	152	6"	152	*	*
	616-A07-450	18"	450	3"	75	*	*	18"	450	*	*	9"	229	9"	229	*	*
Wall/Corner	616-A07-600	24"	600	3"	75	*	*	24"	600	*	*	12"	305	12"	305	*	*
	616-A09-200	8"	200	3"	75	*	*	8"	200	*	*	4"	102	4"	102	*	*
	616-A09-250	10"	250	3"	75	*	*	10"	250	*	*	5"	127	5"	127	*	*
	616-A09-300	12"	300	3"	75	*	*	12"	300	*	*	6"	152	6"	152	*	*
Wall/Corner	616-A09-450	18"	450	3"	75	*	*	18"	450	*	*	9"	229	9"	229	*	*
	616-A09-600	24"	600	3"	75	*	*	24"	600	*	*	12"	305	12"	305	*	*

Shear movement – 25% movement rating.


IPC.858/REV.5

P.O. Box 406 · Muskego, Wisconsin 53150 USA
 inprocorp.com
 Nationwide 800.222.5556/Fax 888.715.8407
 International Sales 262.679.5521/Fax 262.679.5524


INPRO CORPORATION®
 Interior and Exterior Architectural Products

611, 615, 616 Series Flush Mount Wall and Ceiling Systems


615-A09 Wall/Corner Wall/Ceiling
(3" (75mm) system shown)

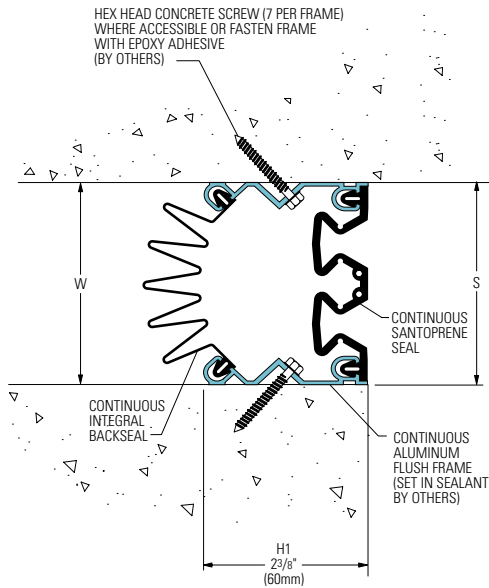


616-A07 Wall/Wall Ceiling/Ceiling
(8" (200mm) system shown)

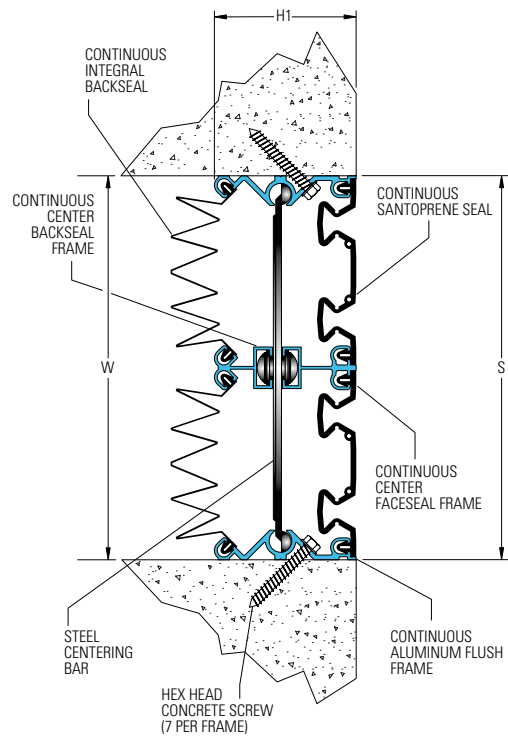

615-A07 Wall/Wall Ceiling/Ceiling
(2" (50mm) system shown)

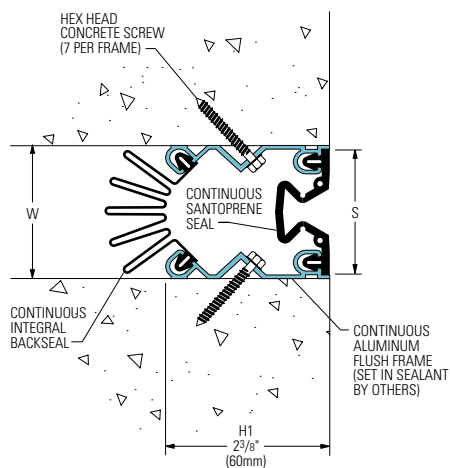


611-A07 Wall/Wall Ceiling/Ceiling
(2" (50mm) system shown)

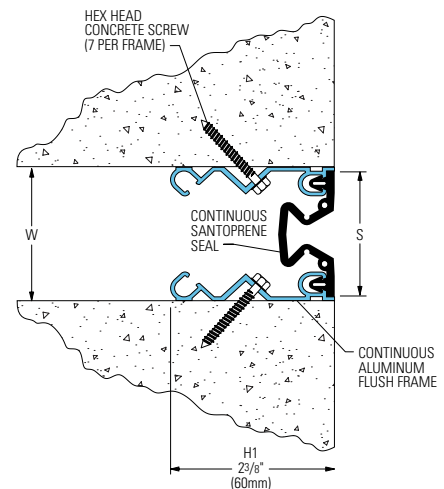

611, 615, 616 Series Options

Reactofire Fire Blanket System (615-A07-050 system shown)

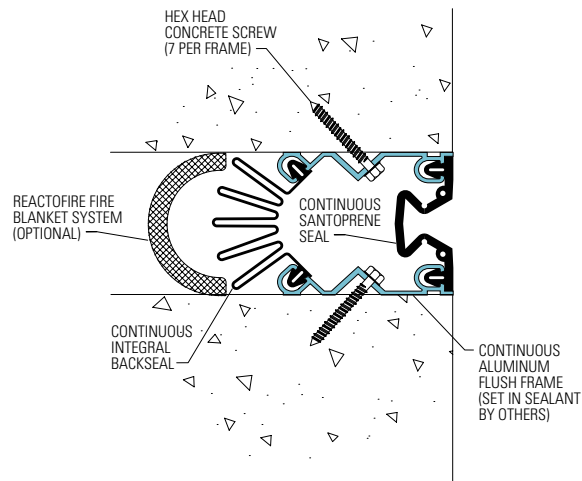

Reactofire Mineral Wool & Sealant Fire Barrier System (615-A07-050 system shown)

