


620, 621 Series

A07 - Wall to Wall

A09 - Wall to Corner

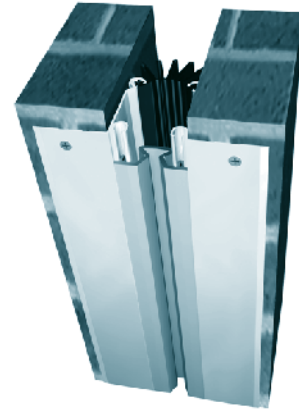

Movement Rating $\pm 25\%$	
Product Guide	 Seismic
	 Interior/Exterior
	 Fire Rated Option

- ▶ Surface mount frame design eases installation in narrow joints and wall to corner conditions
- ▶ Santoprene seals - field heat weldable for weather tight transitions
- ▶ Seal barbs provide secure engagement in frame, making installation easier
- ▶ Standard seal colors: black, beige, gray, off white and bright white. Custom colors available upon request.
- ▶ Centering bar system for extra wide joints eliminates need for expensive pantograph

Application	System	W		H1		H2		S		B		Movement +/-				Load	
		US	mm	US	mm	US	mm	US	mm	US	mm	Horizontal		Vertical		US ton	kN
Wall/Wall Ceiling/Ceiling	620-A07-050	2"	51	2 3/8"	60	*	*	5 13/16"	148	*	*	1"	25	1"	25	*	*
	620-A07-075	3"	76	2 3/8"	60	*	*	6 13/16"	173	*	*	1 1/2"	38	1 1/2"	38	*	*
	620-A07-100	4"	102	2 3/8"	60	*	*	7 13/16"	198	*	*	2"	51	2"	51	*	*
	620-A07-150	6"	152	2 3/8"	60	*	*	9 13/16"	249	*	*	3"	76	3"	76	*	*
Wall/Corner Wall/Ceiling	620-A09-050	2"	51	2 3/8"	60	4 3/8"	111	3 7/8"	98	*	*	1"	25	1"	25	*	*
	620-A09-075	3"	76	2 3/8"	60	4 3/8"	111	4 7/8"	124	*	*	1 1/2"	38	1 1/2"	38	*	*
	620-A09-100	4"	102	2 3/8"	60	4 3/8"	111	5 7/8"	149	*	*	2"	51	2"	51	*	*
	620-A09-150	6"	152	2 3/8"	60	4 3/8"	111	7 7/8"	200	*	*	3"	76	3"	76	*	*

Application	System	W		H1		H2		S		B		Movement +/-				Load	
		US	mm	US	mm	US	mm	US	mm	US	mm	Compression		Expansion		US ton	kN
Wall/Wall	621-A07-200	8"	200	3"	75	*	*	12"	300	*	*	4"	102	4"	102	*	*
	621-A07-250	10"	250	3"	75	*	*	14"	350	*	*	5"	127	5"	127	*	*
	621-A07-300	12"	300	3"	75	*	*	16"	400	*	*	6"	152	6"	152	*	*
	621-A07-450	18"	450	3"	75	*	*	22"	550	*	*	9"	229	9"	229	*	*
	621-A07-600	24"	600	3"	75	*	*	28"	700	*	*	12"	305	12"	305	*	*
Wall/Corner	621-A09-200	8"	200	3"	75	*	*	10"	250	*	*	4"	102	4"	102	*	*
	621-A09-250	10"	250	3"	75	*	*	12"	300	*	*	5"	127	5"	127	*	*
	621-A09-300	12"	300	3"	75	*	*	14"	350	*	*	6"	152	6"	152	*	*
	621-A09-450	18"	450	3"	75	*	*	20"	500	*	*	9"	229	9"	229	*	*
	621-A09-600	24"	600	3"	75	*	*	26"	650	*	*	12"	305	12"	305	*	*


IPC.912/REV.3

P.O. Box 406 · Muskego, Wisconsin 53150 USA
 inprocorp.com
 Nationwide 800.222.5556/Fax 888.715.8407
 International Sales 262.679.5521/Fax 262.679.5524



 Interior and Exterior Architectural Products

620, 621 Series Surface Mount Wall Systems


620-A07 Wall/Wall
(2" (50mm) system shown)

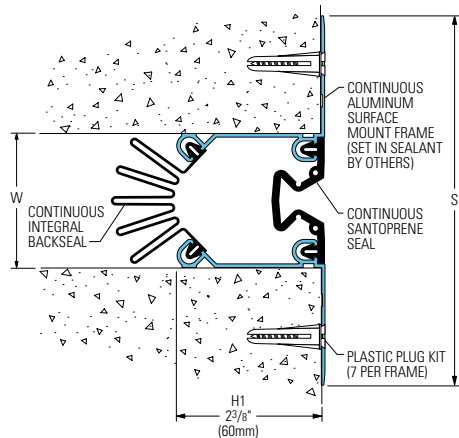


620-A09 Wall/Corner
(3" (75mm) system shown)

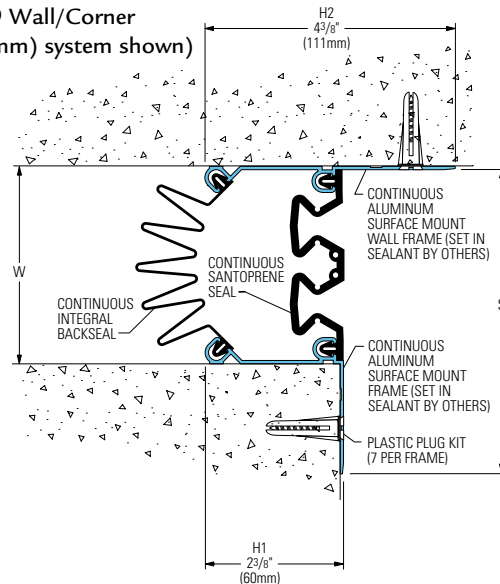

621-A07 Wall/Wall
(8" (200mm) system shown)

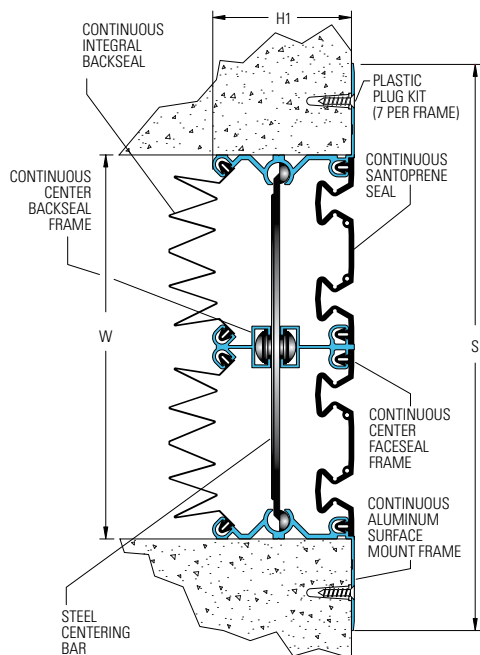

Reactofire Fire Blanket System
(620-A07-050 system shown)

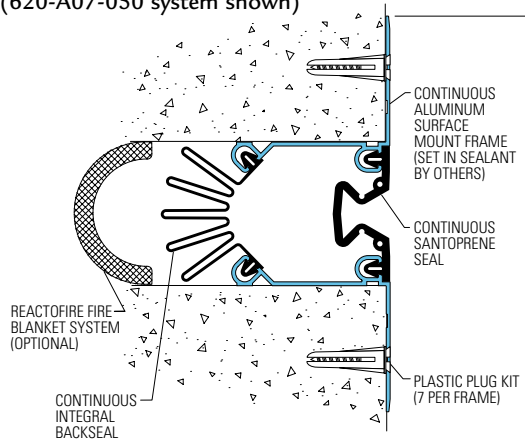

Reactofire Mineral Wool & Sealant Fire Barrier System
(620-A07-050 system shown)

