


925, 921 Series

Fire Barrier Systems
for Floors and Walls - Mineral Wool and Sealant

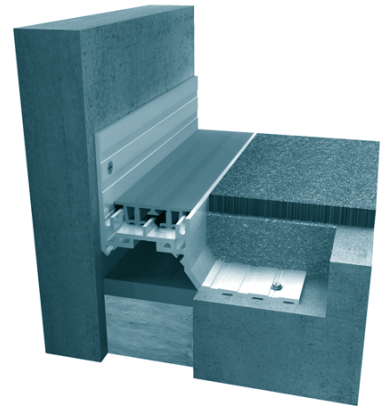


Movement Rating $\pm 20\%$

Product Guide




- ▶ Economical system for joint widths up to 3"
- ▶ Mineral wool supplied in 4' (1.2m) lengths. Compressed and friction-held in gap for easy installation
- ▶ Silicone sealant available in 28.7oz cartridges or 2.63 US gallon pails - Self leveling (horizontal applications)
 - Gun grade (vertical applications)
- ▶ UL2079
- ▶ 3 hour rated
- ▶ Horizontal movement to $3\frac{3}{16}" \pm 20\%$

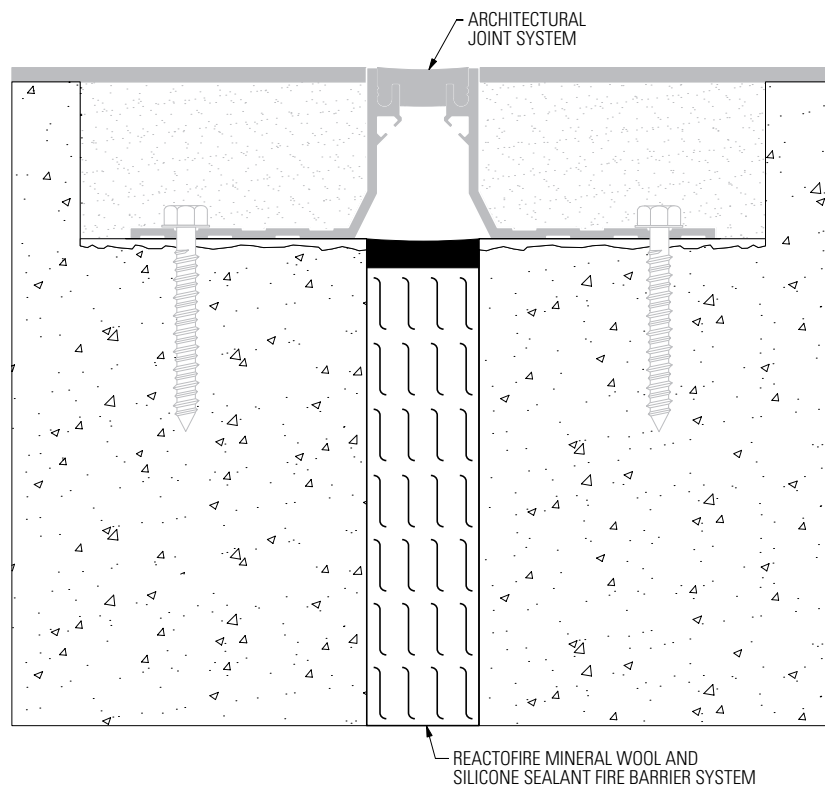


IPC.890/REV.2

925, 921 Series for Floors and Walls

Reactofire Mineral Wool & Sealant Fire Barrier System
(1" (25mm) floor system shown)

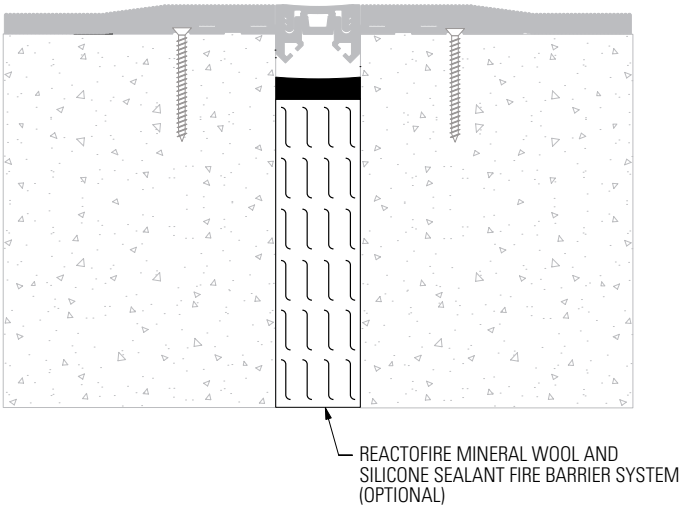

Reactofire Mineral Wool & Sealant Fire Barrier System
(2" (50mm) wall system shown)

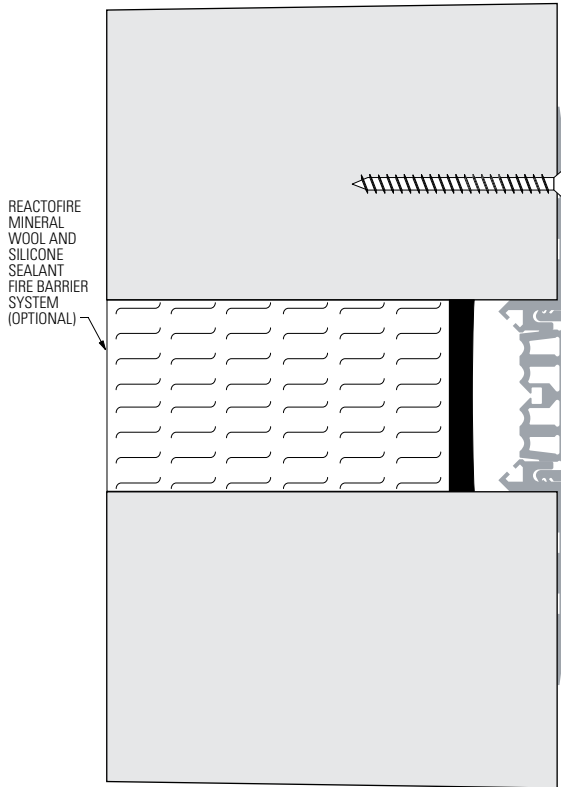

Mineral Wool & Sealant Coverages

Width of Structural Gap	Mineral Wool
1" (25mm) - 1½" (38mm)	2"
1½" (38mm) - 2¼" (56mm)	3"
2¼" (56mm) - 3" (75mm)	4"

Coverage (Installed ¼" thick)	LF/1" Jt	LF/2" Jt	LF/3" Jt
28.7oz. Cartridge	17LF	8.5LF	5.6LF
2.63 US Gallon Pail	20SLF	102SLF	68SLF