
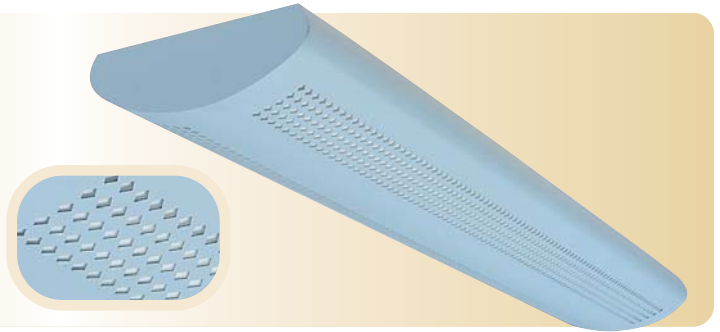


Generation Series 1

G1-DI-10

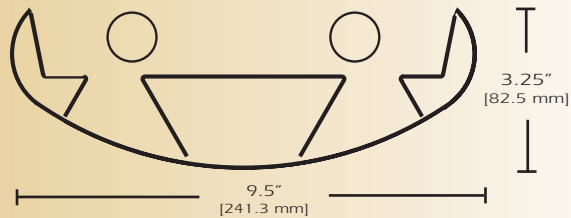

TYPE

FEATURES

The G1-DI-10 is one variation of a complete family of suspended linear fluorescent luminaires. The G1-DI-10 is a direct/indirect version of the family of luminaires. The computer designed optical system creates a widespread indirect distribution while the variety of direct components provides contrast. The low profile and modern design provide excellent efficiency and styling where high performance and uniform lighting are required.

SPECIFICATIONS

Housing: One piece die formed 20-gauge cold rolled steel welded construction forming a 9.50" x 3.25" rounded profile. Continuous diagonal pattern is 1/4" square with white .020 translucent overlay. Finished end caps are laser cut 16-gauge cold rolled steel, with no exposed hardware or knockouts. Aligner brackets are provided to eliminate light leaks and for precision alignment of continuous rows.

Reflector: Die formed 20-gauge cold rolled steel minimum 90% reflectivity finished in high gloss baked white enamel with die formed .025 specular anodized aluminum side reflectors.

Electrical: Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% total harmonic distortion. The minimum number of ballasts will be used unless otherwise specified.

Mounting: Standard Installation is an adjustable self-locking aircraft cable assembly 48" x 3/32" in diameter with 5" canopy. One 16/4 SJT straight 54" cord is supplied with each power feed. Standard pendants are available in 24" lengths. See Accessories for additional mounting.

Finish: Fixture housing and steel components are finished in baked white enamel applied over a five-stage pretreatment process.

Lamps: Fixtures are provided for use with one, two or three 32 watt T8 lamps or 54 watt T5 HO lamps. (Supplied by Others)

Certification: Luminaires are U. L. Listed, C. S. A. certified and are Union Made in the United States of America I.B.E.W.

ORDERING GUIDE

MODEL NO.	DIRECTION	SHIELDING	LAMPS	MOUNTING	LENGTH	FINISH	VOLTAGE	OPTIONS
G1	-	DI	-	10	-			
G1	DI= Direct/Indirect	10= Square Diagonal	132T8 232T8 332T8 154T5 HO 254T5 HO 354T5 HO O= Other Specify	AC= Cable PD= Pendant See Accessories	4= 4 ft 8= 8 ft 12= 12 ft for other, please enter row length (eg. 48=48ft)	W= White CC= Custom Color	120v 277v	See Options Below

Example: **G1-DI-10-232T8-AC-4-W-277V**


Generation One with square diagonal continuous pattern with opal overlay for two 32 watt T8 lamps with two 48 inch aircraft cables and power feed four foot fixture finished in baked white enamel with 277v electronic ballast less than 20% total harmonic distortion.

OPTIONS


E10=	Electronic ballast, high power factor, thermally protected class P, sound rated A, < 10% total harmonic distortion
DIM=	Dimming Ballast
EPC=	Emergency Battery Pack
EMC=	Emergency Circuit
TCW=	Two Circuit Wiring
TDW=	Tandem Wiring
QCW=	Quick Connect Wiring
OTH=	See Accessories for other options available

G 1 - D I - 1 0


LINEAR SECTIONS AND SUSPENSION LOCATION

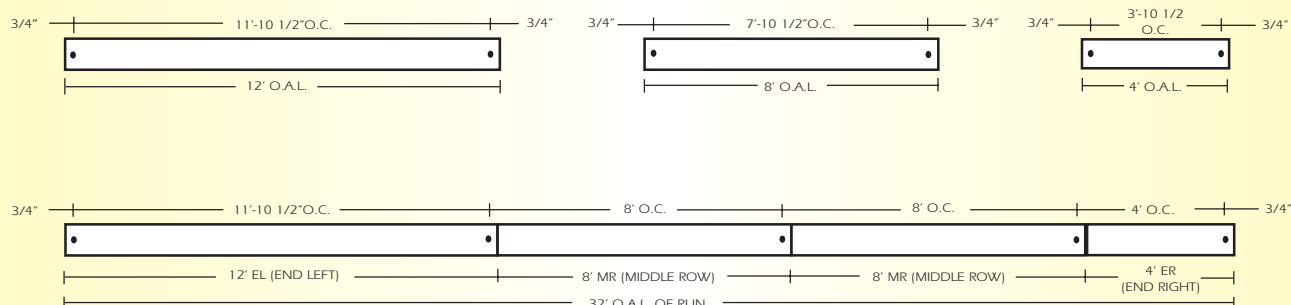

INSTALLATION PREPARATION

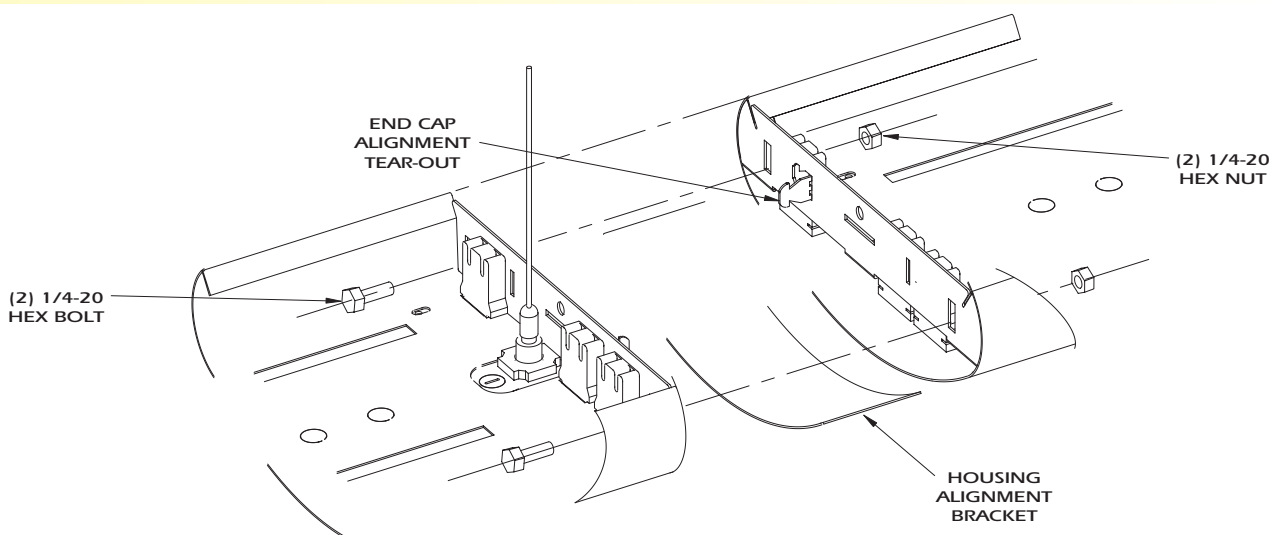

PHOTOMETRY

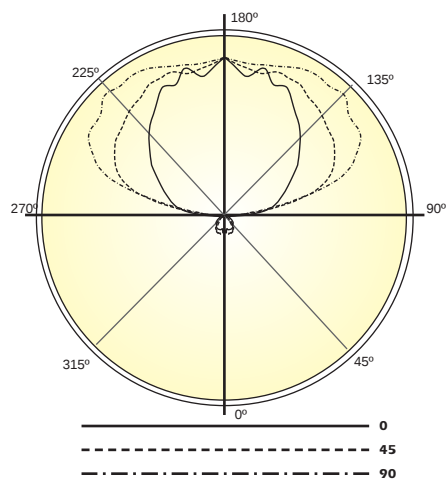

LAMP (2) 32W T8
LUMENS: 2900 PER LAMP

Candela Distribution:


Vert. Angle	0	22.5	45	67.5	90
0	96	96	96	96	96
5	122	112	95	121	121
15	86	121	133	129	130
25	86	135	125	120	124
35	87	111	110	98	85
45	73	97	73	55	44
55	67	73	33	24	24
65	53	39	20	20	16
75	36	21	14	12	15
85	47	31	18	10	11
95	186	229	168	132	126
105	299	500	682	700	690
115	431	611	873	1019	1040
125	588	715	951	1108	1154
135	723	809	993	1162	1233
145	849	937	1015	1160	1206
155	1007	1026	1080	1133	1187
165	1055	1059	1080	1069	1055
175	1053	1073	1096	1053	1114
180	1124	1124	1124	1124	1124

Optical Distribution:
93% Indirect: 7% Direct

Coefficients of Utilization - Zonal Cavity Method:

pfc = 0.20

	.8				.7				.5				.3				.1				0
pw	.7	.5	.3	.1	.7	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	.5	.3	.1	0
RCR																					
0	84	84	84	84	73	73	73	73	51	51	51	32	32	32	14	14	14	5			
1	77	73	70	67	66	63	61	58	45	43	42	28	27	26	12	12	11	4			
2	70	64	59	55	60	55	51	48	39	36	34	24	23	22	10	10	9	3			
3	63	56	50	45	55	48	43	40	34	31	29	21	20	18	9	8	8	3			
4	58	49	43	38	50	43	37	33	30	27	24	19	17	15	8	7	7	2			
5	53	44	37	32	45	38	32	28	27	23	21	17	15	13	7	6	6	2			
6	49	39	32	27	42	34	28	24	24	20	18	15	13	11	6	6	5	2			
7	45	35	28	24	38	30	25	21	21	18	15	13	11	10	6	5	4	2			
8	41	31	25	21	35	27	22	18	19	16	13	12	10	8	5	4	4	1			
9	38	28	22	18	33	25	19	16	18	14	12	11	9	7	5	4	3	1			
10	35	26	20	16	30	22	17	14	16	13	10	10	8	7	4	3	3				



Total Luminaire Optical Efficiency = 87.5%