

Directory Series S560 Printed Panel Directory

- ▶ Clearly label a floor plan or door schedule
- ▶ Digitally printed panels create a custom directory
- ▶ Subsurface printed
- ▶ Panels replace easily and are magnetized to the frame

Standard Sizes


- ▶ Smallest size: 24" x 12"
- ▶ Largest size: 60" x 60"
- ▶ Standard printed panels are 12" x 12"

Frame Options

- ▶ PVC or Aluminum frame

Additional Information

- ▶ Directories available in virtually any color
- ▶ Logos available; digital file required
(eps, dmx, ai and wmf files accepted)

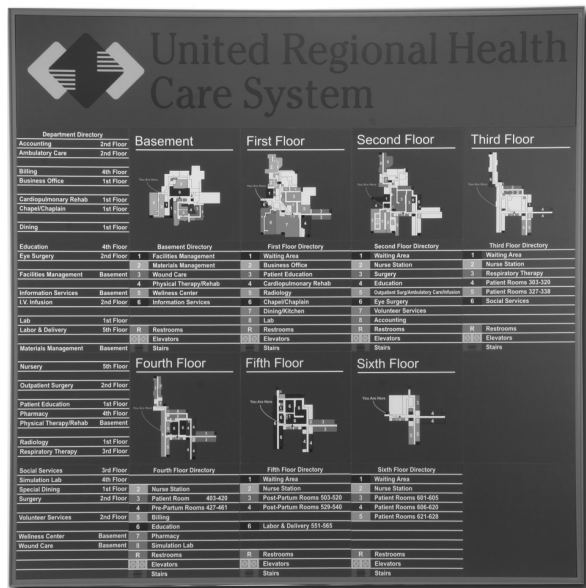

IPC.982/REV.3

S560 Printed Panel Directory

Suggested Specifications

PART 1 – GENERAL

1.01 SUMMARY

- A. Interior non-illuminated printed panel directory signage.

1.02 SECTION INCLUDES

- A. S560 Modular Printed Panel Directory Sign

1.03 REFERENCES

- A. Americans with Disabilities Act (ADA)
B. American National Standards Institute (ANSI)

1.04 SYSTEM DESCRIPTION

- A. Performance Requirements: Provide signage systems that conform to the following requirements of regulatory agencies and the quality control of InPro SignScape.

1. Signage shall comply with all applicable provisions of the ADA and ANSI A117.1-1998

1.05 SUBMITTALS

- A. Product Data: Manufacturer's printed product data for each signage system indicated in this section.
B. Signage Report: SignPro signage report indicating signage sizes, lettering and construction.
C. Samples: Verification samples of signage systems minimum of 6 inches square of each type and color indicated.

- D. Manufacturer's Installation Instructions: Printed Installation Instructions for each signage system.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials in unopened factory packaging to the jobsite.
B. Inspect materials at delivery to assure that specified product have been received.
C. Store in original packaging in a climate controlled environment away from direct sunlight.

1.07 WARRANTY

- A. Standard InPro SignScape limited lifetime warranty against material and manufacturing defects.

PART 2 – PRODUCTS

2.01 MANUFACTURERS

- A. Acceptable Manufacturer: InPro SignScape,
InPro Corporation PO Box 406, Muskego, WI 53150
USA, Telephone 800-222-5556, Fax: 888-715-8407
E-mail: service@inprocorp.com

- B. Substitutions: Not permitted

- C. Provide all signage systems from a single manufacturer.

2.02 MATERIALS

A. Signage Panel

1. Provide signage material in a color selected by the architect from InPro SignScape color selection.

B. Frames

1. Extruded Aluminum Frames: Aluminum frames shall be fabricated from 6063-T5 aluminum.

2. Extruded Vinyl Frames: Vinyl frames shall be extruded from chemical and stain resistant polyvinyl chloride.

B. Frame Finishes

1. Extruded Aluminum Frames: Color to be selected, by the architect, from the InPro SignScape finish selection. Aluminum shall be anodized.

2. Extruded Vinyl Frames: Color to be selected, by the architect, from the InPro SignScape finish selection. Texture shall be smooth.

3. Enclosed Case with Locking Glass Door: Color of case to be satin aluminum.

C. Production Style

1. Directory Sign Panel Structure

- a. Provide sign panel structure consisting of top layer of .060" (1.6mm) polycarbonate sheet, back printed with UV curable inks. Polycarbonate is bonded to 3 mil white laminate

2.03 MANUFACTURED UNITS

A. Directory Panel

1. Size and construction
Minimum size – 12"h (305mm) x 24"w (610mm),

with 2 - 12"h (310mm) x 12"w (310mm) printed panels

Maximum size – 60"h (305mm) x 60"w (1.52m), with 2 - 12"h (310mm) x 12"w (310mm) printed panels

B. Aluminum Frames

1. Size, exterior dimensions

12.75"h (324mm) x 24.75"w (629mm) minimum size

60.75"h (1.54m) x 60.75"w (1.54m) maximum size

C. Extruded Vinyl Frame

1. Size, exterior dimensions

12.75"h (324mm) x 24.75"w (629mm) minimum size

60.75"h (1.54m) x 60.75"w (1.54m) maximum size

PART 3 – EXECUTION

3.01 EXAMINATION

- A. Examine areas and conditions in which the signage system will be installed.

1. Complete all finishing operations, including painting, before beginning installation of signage systems.
2. Wall surface shall be dry and free from dirt, grease and loose paint.

3.02 PREPARATION

- A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

3.03 INSTALLATION

- A. General: Locate the signage system as indicated on the approved detail drawing for the appropriate substrate and in compliance with the InPro SignScape installation instructions. Install signage systems level and plumb at the height indicated on the drawings.

3.04 CLEANING

- A. At completion of the installation, clean surfaces in accordance with the InPro SignScape clean up and maintenance instructions.

