

Installation Instructions

Ultra Cube Track with the Safety Loading Unit

FIG. 1

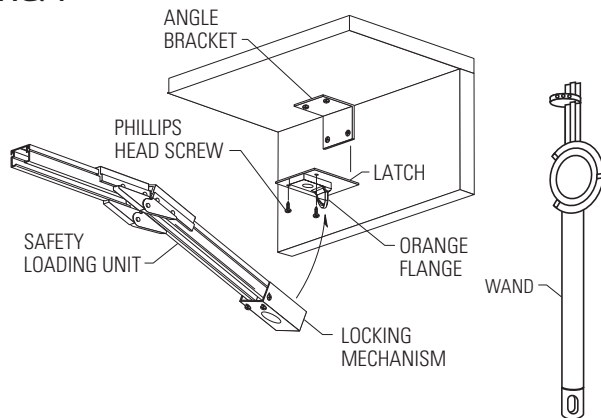


FIG. 2


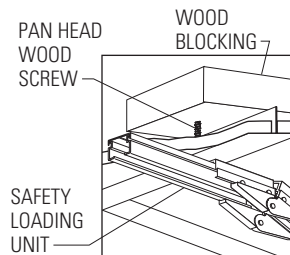


FIG. 3

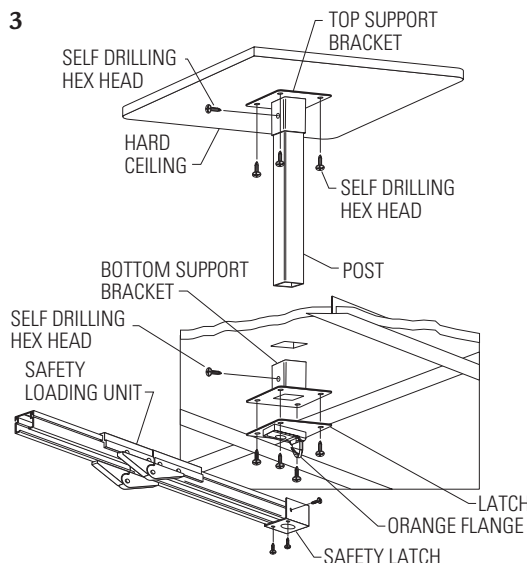

Note: Verify the drop ceiling is installed and functioning properly before installing Safety Loading Unit and track.

When safety latch lands on wall (see Figure 1):

1. Attach the angle bracket to the wall or suspended ceiling corner angle.
2. Lift the Safety Loading Unit into place onto the angle bracket.
3. Trace and drill holes in top angle bracket. Screw in. **DO NOT USE SCREW GUN.**
4. Line up orange flange with locking mechanism to ensure easy operation. Attach latch and orange flange plate to top of the angle bracket. Tighten all screws when Safety Loading Unit latch opens and closes smoothly.
5. Attach safety loading unit to a permanent section of track, making sure the hinge is pushed entirely onto the track and it is reinforced with wood* or sheet metal blocking or a suspended support set (see Figure 2 and 3).
6. To operate, turn wand left to lock the Safety Loading Unit into place. Turn wand right to unlock.

When safety latch does not land on wall:

1. Attach the safety loading unit bracket to the suspended ceiling. Use a support set for reinforcement by mounting the Safety Loading Unit to a hard ceiling above the suspended ceiling (see Figure 3).
 - 1a. Attach top latch support bracket to the hard ceiling with the appropriate fasteners for the substrate e.g. drywall screws on drywall.
 - 1b. Cut post to appropriate length and attach it to the top latch bracket.
 - 1c. Cut square holes through the suspended ceiling for the posts. Screw the bottom support bracket to the post. **DO NOT USE SCREW GUN.**
 - 1d. Screw the Safety Loading Unit bracket to the bottom support bracket. **DO NOT USE SCREW GUN.**
2. Line up orange flange with locking mechanism to ensure easy operation. Tighten all screws when Safety Loading Unit latch opens and closes smoothly.
3. Attach safety loading unit to a permanent section of track, making sure the hinge is pushed entirely onto the track and it is reinforced with wood* or sheet metal blocking or a suspended support set (see Figure 2 and 3).
4. To operate, turn wand left to lock the Safety Loading Unit into place. Turn wand right to unlock.

Attaching rest of track: See Ultra and Whisper Cube regular track or track with Gridclips Installation Instructions.

* Check your local fire codes for maximum amount of wood allowed when using wood blocking.

IPC.519/REV.6

Installation Questions?

Contact our Installation Hotline 866.EZINPRO
For Sales & Customer Service call 800.222.5556

INPRO
CLICKEZE
Privacy Systems/Soft Goods