



Sanparrel Rigid Vinyl Sheet

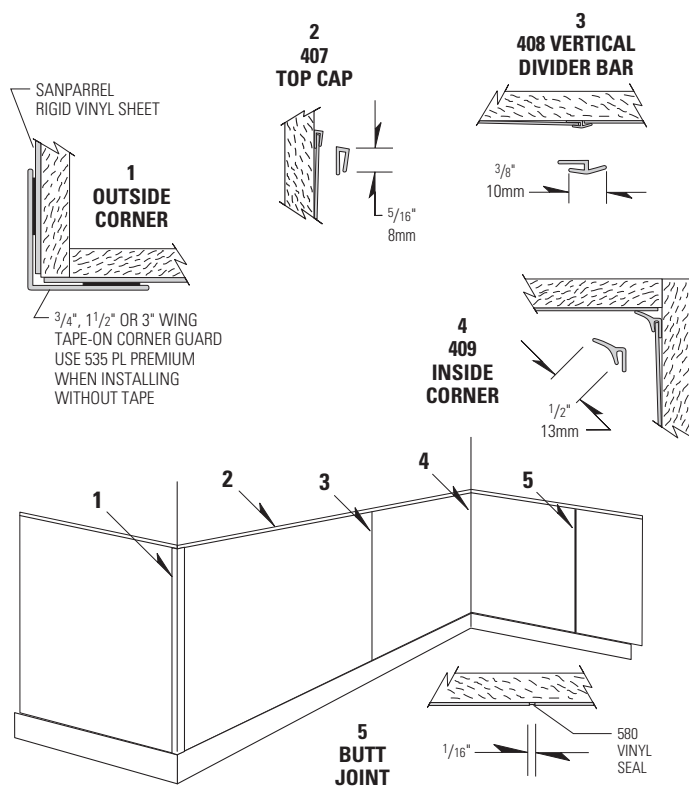

- ▶ Provides reliable wall protection and is more durable, longer lasting and easier to clean than paint
- ▶ Available in standard 3' (.91m) and 4' (1.22m) widths and 8' (2.44m) lengths. Custom lengths and rolls up to 120' (36m) available
- ▶ Standard thicknesses of .040 (1mm) & .060 (1.5mm), .030 (.8mm) & .080 (2mm) thickness also available
- ▶ Scratch and stain resistant rigid vinyl
- ▶ Quick Ship applies to .040" (1mm) and .060" (1.5mm) thicknesses in 4' (1.22m) x 8' (2.44m) sheets only

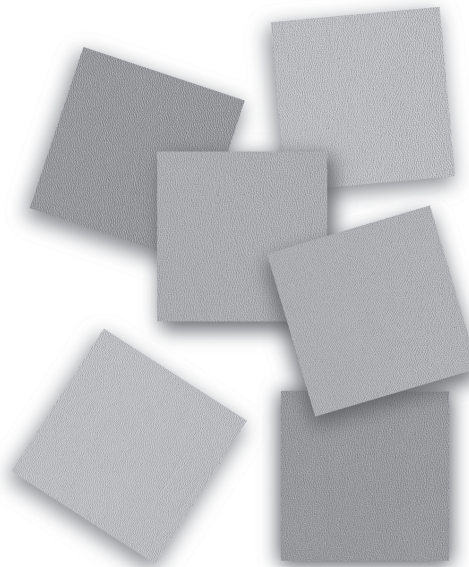

IPC.460/REV.10

P.O. Box 406 · Muskego, Wisconsin 53150 USA
inprocorp.com
Nationwide 800.222.5556/Fax 888.715.8407
International Sales 262.679.5521/Fax 262.679.5524

INPRO
IPC Interior Protection Products
and Decorative Surfaces

Sanparrel Rigid Vinyl Sheet

Suggested Specifications

PART 1 - GENERAL

1.01 SUMMARY

- A. Rigid vinyl sheet for wall protection and decoration
1.02 SECTION INCLUDES

- A. Sanparrel Rigid Vinyl Sheet

1.03 REFERENCES

- A. American Society for Testing and Materials (ASTM)
B. National Building Code of Canada (NBC)
C. National Fire Protection Association (NFPA)
D. Society of Automotive Engineers (SAE)
E. Underwriters Laboratory (UL)
F. Underwriters Laboratory of Canada (ULC)
G. Uniform Building Code (UBC)

1.04 SYSTEM DESCRIPTION

- A. Performance Requirements: Provide rigid vinyl sheet systems that conform to the following requirements of regulatory agencies and the quality control of IPC Door and Wall Protection Systems, InPro Corporation.

1. Fire Performance Characteristics: Provide UL Classified Sanparrel Rigid Vinyl Sheet conforming with the NFPA Class A fire rating. Surface burning characteristics as determined by UL-723 (ASTM E-84), for Sanparrel Rigid Vinyl Sheet installed with 3M Fastbond 30, InPro Bond Adhesive, or Formulated Solutions, LLC "XT-2000+" Adhesive shall be a maximum flame spread of 20 and a maximum smoke developed of 350 for .060" (1.5mm) thick material. Provide ULC (Canada) listed Sanparrel Rigid Vinyl Sheet conforming to the requirements of the National Building Code of Canada 1990, Subsection 3.1.13. Surface burning characteristics, as determined by CAN/ULC-S102.2, shall be flame spread of 15 and smoke developed of 30.
2. Self Extinguishing: Provide rigid vinyl sheet with a CC1 classification, as tested in accordance with the procedures specified in ASTM D-635-74, Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position, as referenced in UBC S2-4-1988.
3. Provide sheet materials that have been tested and results filed in compliance with article 15, part 1120 of the New York State uniform fire prevention and building code. DOS # 09960-930.504.4001.
4. Impact Strength: Provide Sanparrel Rigid Vinyl Sheet that has an Impact Strength of 30.4 ft-lbs/ inch of thickness as tested in accordance with the procedures specified in ASTM D-256-90b, Impact Resistance of Plastics.
5. Chemical and Stain Resistance: Provide rigid vinyl sheet that show resistance to stain when tested in accordance with applicable provisions of ASTM D-543.
6. Fungal and Bacterial Resistance: Provide rigid vinyl that does not support fungal or bacterial growth as tested in accordance with ASTM G-21 and ASTM G-22.
7. Color Consistency: Provide components matched in accordance with SAE J-1545 - (Delta E) with a color difference no greater than 1.0 units using CIE Lab, CIE CMC, CIE LCh, Hunter Lab or similar color space scale systems.

1.05 SUBMITTALS

- A. Product Data: Manufacturer's printed product data for each type of Sanparrel Rigid Vinyl Sheet specified.
- B. Detail Drawings: Mounting details with the appropriate adhesives for specific project substrates.
- C. Samples: Verification samples of Sanparrel Rigid Vinyl Sheet, 8" (203mm) square, of each type and color indicated.

- D. Manufacturer's Installation Instruction: Printed installation instructions for Sanparrel Rigid Vinyl Sheet.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials in unopened factory packaging to the jobsite
- B. Inspect materials at delivery to assure that specified products have been received.
- C. Store in original packaging in a climate controlled location away from direct sunlight.

1.07 PROJECT CONDITIONS

- A. Environmental Requirements: Products must be installed in an interior climate controlled environment.

1.08 WARRANTY

- A. Standard IPC Limited Lifetime Warranty against material and manufacturing defects.

PART 2 - PRODUCTS

2.01 MANUFACTURER

- A. Acceptable Manufacturer:
IPC Door and Wall Protection Systems, InPro Corporation, PO Box 406 Muskego, WI 53150 USA; Telephone: 800.222.5556, Fax: 888.715.8407, www.inprocorp.com

- B. Substitutions: Not permitted

- C. Provide all Sanparrel Rigid Vinyl Sheet and wall protection from a single source.

2.02 MANUFACTURED UNITS

- A. Rigid Vinyl Sheet

1. Sanparrel, Rigid Vinyl Sheet Options

Item #	Dimensions	Thickness
305	3'x8' (.91m x 2.44m)	.040" = 3/64" (1mm), available
306	3'x8' (.91m x 2.44m)	.060" = 1/16" (1.5mm), available
404	4'x8' (1.22m x 2.44m)	.030" = 1/32" (.8mm), available
405	4'x8' (1.22m x 2.44m)	.040" = 3/64" (1mm), standard
406	4'x8' (1.22m x 2.44m)	.060" = 1/16" (1.5mm), standard
410	4'x8' (1.22m x 2.44m)	.080" = 3/64" (2mm), available

Also available:

3' x 10' (.91m x 3.04m) sheets - thickness, .040" (1mm) and .060" (1.5mm)
3' x 80' (.91m x 24.3m) rolls - thickness, .060" (1.5mm)
3' x 120' (.91m x 36.5m) rolls - thickness, .040" (1mm)
4' x 10' (1.22m x 3.04m) sheets - thickness, .030" (.8mm), .040" (1mm), .060" (1.5mm) and .080" (2mm)
4' x 80' (1.22m x 24.3m) rolls - thickness, .060" (1.5mm)
4' x 120' (1.22m x 36.5m) rolls - thickness, .030" (.8mm) and .040" (1mm)
Custom sizes - available
Backing - unbacked
Accessories:

407 Top Cap; Length: 8' (2.44m) standard, 10' (3.04m) available
408 Vertical Divider Bar; Length: 8' (2.44m) standard, 10' (3.04m) available
409 Inside Corner; Length: 8' (2.44m) standard, 10' (3.04m) available
417 Top Cap for .080" sheet; Length: 8' (2.44m) standard, 10' (3.04m) available
418 Vertical Divider Bar for .080" sheet; Length: 8' (2.44m) standard, 10' (3.04m) available
419 Inside Corner for .080" sheet; Length: 8' (2.44m) standard, 10' (3.04m) available

3448, 3496, 11248 or 11296 Outside Corner
580 Color matched VinylSeal

2.03 MATERIALS

- A. Vinyl: Sanparrel shall be manufactured from chemical and stain resistant polyvinyl chloride with the addition of impact modifiers. No plasticizers shall be added (plasticizers may aid in bacterial growth).

2.04 ACCESSORIES

- A. Top caps, inside corners, divider bars and outside corners shall be made of extruded PVC.

2.05 FINISHES

- A. Color or pattern of Sanparrel to be selected by the architect from the IPC finish selection. Surface shall have a haircell texture.
- B. Accessories: Top caps, inside corners, divider bars and outside corners shall be of a color matching the Sanparrel.

PART 3 - EXECUTION

3.01 EXAMINATION

- A. Examine areas and conditions in which the rigid vinyl sheet will be installed.

1. Complete all finishing operations, including painting, before beginning installation of rigid vinyl sheet materials.

- B. Wall surface shall be dry and free from dirt, grease and loose paint.

3.02 PREPARATION

- A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

3.03 INSTALLATION

- A. General: Locate the rigid vinyl sheet as indicated on the approved detail drawing for the appropriate substrate and in compliance with the IPC installation instructions. Install level and plumb at the height indicated on the drawings.

- B. Installation of Sanparrel Rigid Vinyl Sheet

1. Adhere to substrate with InPro Bond, a freeze-thaw stable, nonflammable, high strength, water based adhesive that trowels on and allows approximately 20 minutes working time before firming.
2. Adhere to substrate with XT-2000+, a freeze-thaw stable, nonflammable, high strength, water based adhesive that trowels on and allows approximately 20 minutes working time before firming.
3. Adhere to substrate with Fastbond 30, a nonflammable, high strength, water-dispersed contact adhesive, with very little odor. Smooth roll surface.

3.04 CLEANING

- A. At completion of the installation, clean surfaces in accordance with the IPC clean-up and maintenance instructions.

