

Sanparrel Directional Series S230 Overhead Signs Double Sided

Standard Sizes


- ▶ Available in 6" (152mm), 8" (203mm), 9" (229mm), 12" (305mm) and 15" (381mm) heights with lengths from 6" (152mm) to 72" (1.83m)
- ▶ Must have 80" (1.98m) of clearance from bottom of sign to floor

Production Styles

- ▶ Tactile

Additional Information

- ▶ Manufactured from Sanparrel Rigid Vinyl Sheet and 10mm Celtec board
- ▶ Signs available in more than 180 colors and patterns
- ▶ Mounts to ceiling using InPro Clickeze track and gridclips
- ▶ Logos available; digital file required (eps, wmf, dmx or ai files accepted)

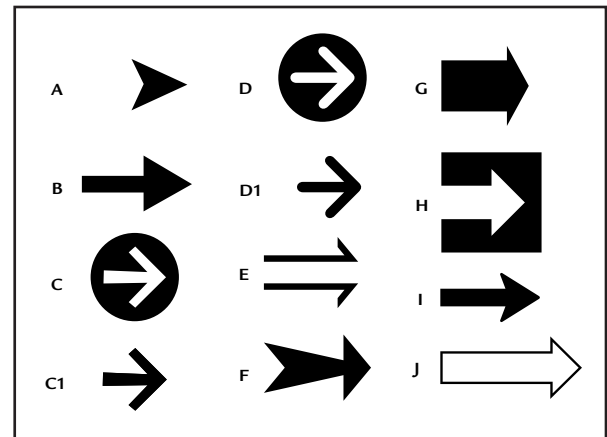

IPC.956/REV.7



P.O. Box 406 · Muskego, Wisconsin 53150 USA
inprocorp.com
Nationwide 800.222.5556/Fax 888.715.8407
International Sales 262.679.5521/Fax 262.679.5524

INPRO
SIGNSCAPE
Signage and Wayfinding

S230 Directional Sign

Suggested Specifications

PART 1 – GENERAL

1.01 SUMMARY

- A. Interior non-illuminated directional surface mounted signage.

1.02 SECTION INCLUDES

- A. S230 Overhead Mount Directional Signage

1.03 REFERENCES

- A. Americans with Disabilities Act (ADA)
B. American National Standards Institute (ANSI)

1.04 SYSTEM DESCRIPTION

- A. Performance Requirements: Provide signage systems that conform to the following requirements of regulatory agencies and the quality control of InPro SignScape.

1. Signage shall comply with all applicable provisions of the ADA and ANSI A117.1-1998

1.05 SUBMITTALS

- A. Product Data: Manufacturer's printed product data for each signage system indicated in this section.
B. Signage Report: SignPro signage report indicating signage sizes, lettering and construction.
C. Samples: Verification samples of signage systems minimum of 6 inches (152mm) square of each type and color indicated.
D. Manufacturer's Installation Instructions: Printed Installation Instructions for each signage system.

1.06 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials in unopened factory packaging to the jobsite.
B. Inspect materials at delivery to assure that specified product have been received.
C. Store in original packaging in a climate controlled environment away from direct sunlight.

1.07 WARRANTY

- A. Standard InPro SignScape limited lifetime warranty against material and manufacturing defects.

PART 2 – PRODUCTS

2.01 MANUFACTURERS

- A. Acceptable Manufacturer: InPro SignScape,
InPro Corporation PO Box 406, Muskego, WI 53150

USA Telephone 800-222-5556, Fax: 888-715-8407
E-mail: service@inprocorp.com

- B. Substitutions: Not permitted
C. Provide all signage systems from a single manufacturer.

2.02 MATERIALS

A. Mounting Tracks

1. Extruded Aluminum:

- a. Mounting Track: Aluminum mounting track shall be fabricated from 6063-T5 aluminum.
b. Center Support: Aluminum center support shall be fabricated from 6063-T5 aluminum.
c. Overhead Mounting Channel: Aluminum overhead mounting channel shall be fabricated from 6063-T5 aluminum.
d. Mounting Clips: Gridclips shall be fabricated from injection molded thermo-plastic

- B. Aluminum Finish: Aluminum finish shall be white.

C. Production Style

Overhead Signage Panels

1. Provide Sanparrel sign material consisting of a top layer of .040" (1mm) material, a middle layer of $\frac{3}{8}$ " (10mm) white foam PVC material, and a back layer of .040" (1mm) material. Top and back layers are bonded to white foam PVC sheet. Additional .040" (1mm) material is cut and adhered to the top and/or back layer to create signage.

2.03 MANUFACTURED UNITS

A. Sizes

1. 6" x 6" (152mm x 152mm),
6" x 12" (152mm x 305mm)
6" x 24" (152mm x 610mm),
6" x 30" (152mm x 762mm),
6" x 36" (152mm x 910mm),
6" x 42" (152mm x 1.1m)
2. 9" x 9" (229mm x 229mm),
9" x 12" (229mm x 305mm)
9" x 24" (229mm x 610mm),
9" x 30" (229mm x 762mm),
9" x 36" (229mm x 910mm),
9" x 42" (229mm x 1.1m)

3. 8" x 8" (203mm x 203mm),
4. 12" x 12" (305mm x 305mm),
12" x 30" (305mm x 762mm),
12" x 36" (305mm x 910mm),
12" x 42" (305mm x 1.07m),
12" x 48" (305mm x 1.22m),
12" x 54" (305mm x 1.37m),
12" x 60" (305mm x 1.52m),
12" x 66" (305mm x 1.68m),
12" x 72" (305mm x 1.83m)
5. 15" x 36" (381mm x 910mm),
15" x 42" (381mm x 1.07m),
15" x 48" (381mm x 1.22m),
15" x 54" (381mm x 1.37m),
15" x 60" (381mm x 1.52m),
15" x 66" (381mm x 1.68m),
15" x 72" (381mm x 1.83m)

All corners are $\frac{3}{4}$ " (19mm) radius

PART 3 – EXECUTION

3.01 EXAMINATION

- A. Examine areas and conditions in which the signage system will be installed.
1. Complete all finishing operations, including painting, before beginning installation of signage systems.
2. Wall surface shall be dry and free from dirt, grease and loose paint.

3.02 PREPARATION

- A. General: Prior to installation, clean substrate to remove dust, debris and loose particles.

3.03 INSTALLATION

- A. General: Locate the signage system as indicated on the approved detail drawing for the appropriate substrate and in compliance with the InPro SignScape installation instructions. Install signage systems level and plumb at the height indicated on the drawings.

3.04 CLEANING

- A. At completion of the installation, clean surfaces in accordance with the InPro SignScape clean up and maintenance instructions.

