


Installation Instructions

Stainless Steel Door Edge Protector:

Models 190, 193, 290, 293

FIG. 1a

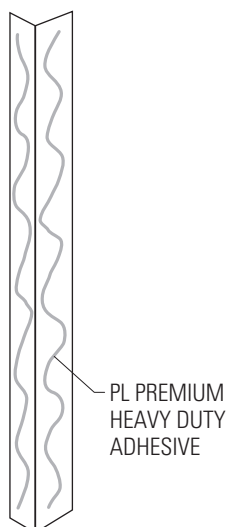


Please read all instructions before installing door edge protector.

Material must be stored, installed and used in environmentally controlled conditions.

1. Allow door edge protector to reach room temperature before installing. The door surface must be dry and free of dirt, dust, oil, loose paint, wax and grease. Check the door clearance to see if the door will close properly with door edge protector in place. If needed, plane the edge of the door where the door edge protector will be mounted until there is proper clearance.
2. **CEMENT-ON INSTALLATION**
Apply a bead of PL Premium Heavy Duty Adhesive in a zig-zag pattern over the back of the door edge protector. See Figure 1a.

Position the door edge protector on the door and apply pressure until a tight fit is achieved. Remove the protective plastic coating from the exposed surface of the door edge protector. See Figure 1b.

FIG. 1b

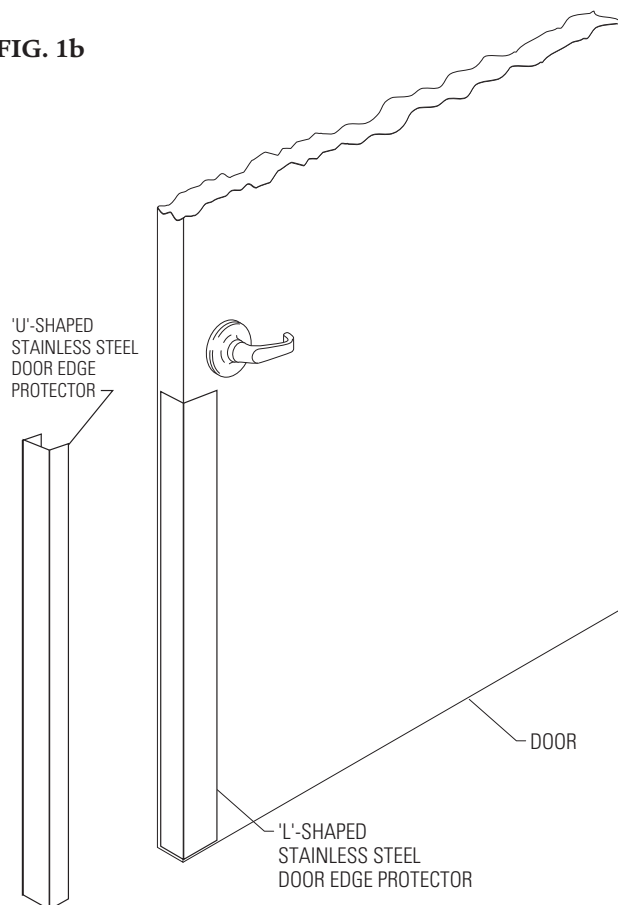

IPC.453/REV.3

Installation Questions?

Contact our Installation Hotline 866.EZINPRO
For Sales & Customer Service call 800.222.5556


INPRO CORPORATION®
Interior and Exterior Architectural Products

Installation Instructions

Stainless Steel Door Edge Protector:

Models 190, 193, 290,293

FIG. 2

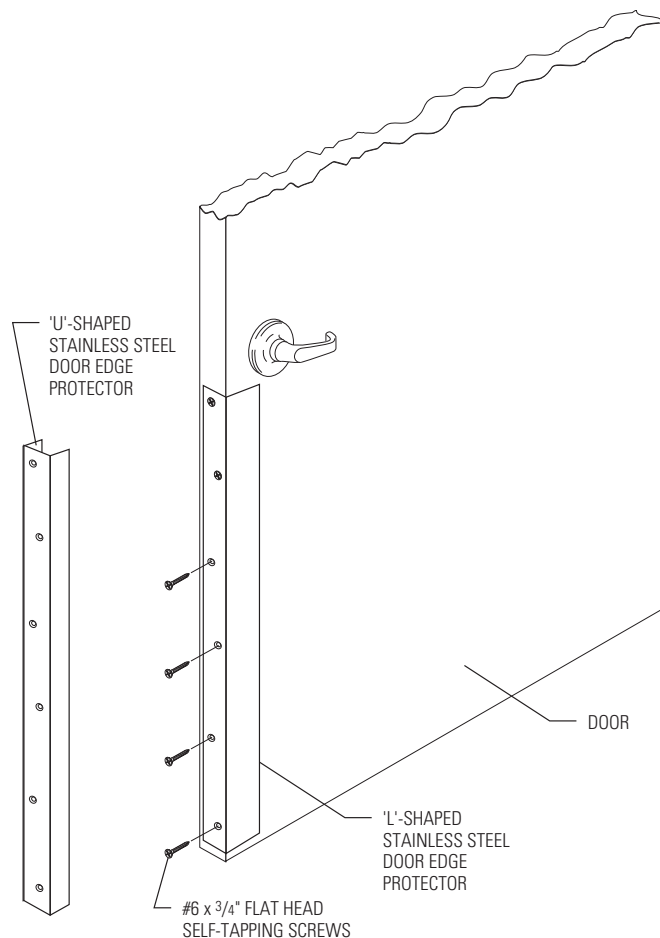

3. SCREW-ON INSTALLATION

Attach door edge protector to door with provided hardware. Remove the protective plastic coating from the exposed surface of the door edge protector. See Figure 2.



Installation Questions?

Contact our Installation Hotline 866.EZINPRO
For Sales & Customer Service call 800.222.5556

INPRO CORPORATION
Interior and Exterior Architectural Products