



Exterior Compression Seal Series

CR - Parking and Bridge Deck

WM - Parking and Bridge Deck

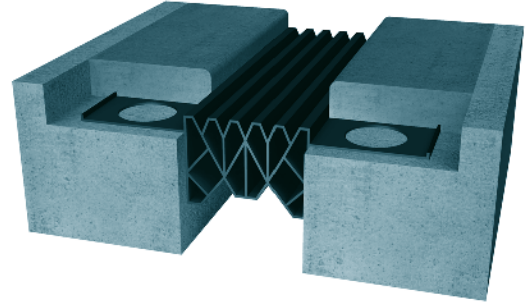

Product Guide



CR Series

- ▶ Forms a smooth walking surface for pedestrians
- ▶ Constant surface during cyclic action
- ▶ Ideal system for both new and retrofit vehicular applications
- ▶ Heat or adhesive splice for watertight directional changes
- ▶ Elastomeric concrete header system for heavy traffic
- ▶ Santoprene membrane

WM Series

- ▶ Low profile seal installs quickly and easily
- ▶ Use for buried joints requiring positive leak proofing
- ▶ Ideal system for both new and retrofit vehicular applications
- ▶ Heat or adhesive splice for watertight directional changes
- ▶ Elastomeric concrete header system for ehavy traffic
- ▶ Santoprene membrane

Application				Minimum Joint Width		Maximum Joint Width		B		H2	
	System	Nominal Seal Width						Blockout		Seal Depth	
			US	mm	US	mm	US	mm	US	mm	US
Parking Deck	CR-225	2 1/4"	57	3/4"	19	1 3/4"	44	3"	76	3/4"	19
	CR-250	2 1/2"	64	1"	25	2 1/4"	57	3"	76	3/4"	19
	CR-300	3"	76	1 1/2"	38	2 3/4"	70	3"	76	3/4"	19
	CR-400	4"	102	1 5/8"	41	3 3/4"	95	3"	76	3/4"	19
	CR-500	5"	127	2"	51	4 3/4"	121	3"	76	3/4"	19
	CR-600	6"	152	2 3/4"	70	5 3/4"	146	3"	76	3/4"	19
Parking Deck/ Buried Joints	WM-125	1 1/4"	32	3/4"	19	2 3/4"	70	2 1/2"	64	3/4"	19
	WM-150	1 1/2"	38	3/4"	19	3"	76	2 1/2"	64	3/4"	19
	WM-200	1 3/4"	44	1 3/4"	44	5 3/4"	146	2 1/2"	64	3/4"	19

		Yield/Kit	
		CuIn	CuCm
Header Material	Polycrete Cold Applied	600	9832
	Polycrete Hot Applied	670	10979
	Polycrete HP	120	19664


IPC.886/REV.5

P.O. Box 406 · Muskego, Wisconsin 53150 USA
 inprocorp.com
 Nationwide 800.222.5556/Fax 888.715.8407
 International Sales 262.679.5521/Fax 262.679.5524

INPRO CORPORATION®
 Interior and Exterior Architectural Products

Parking and Bridge Deck Compression Seal Series

CR Series Deck/Deck
(2" (50mm) system shown)

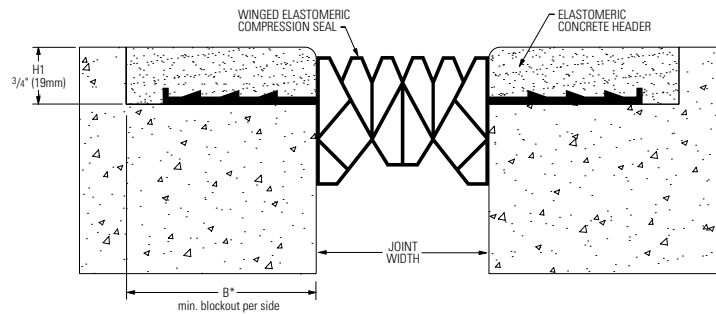

WM Series Deck/Deck
(2" (50mm) system shown)

