


New Age Series

NAS-PI

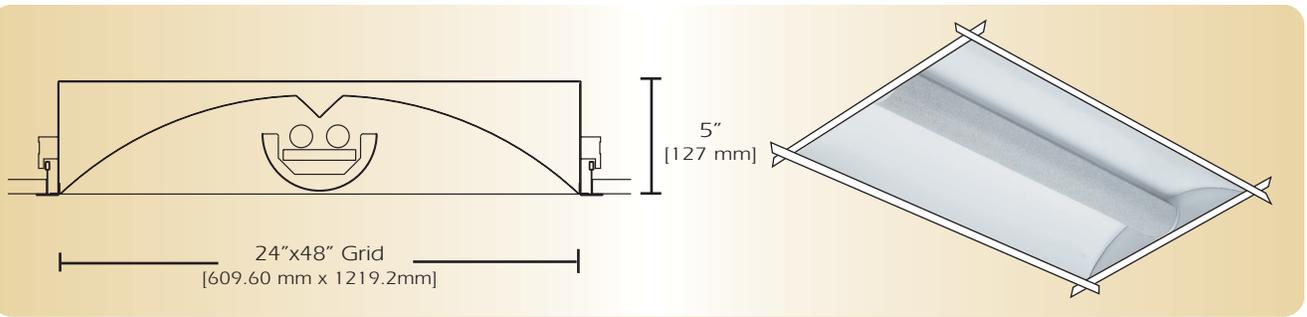

TYPE _____

FEATURES

The NAS-PI is one variation of a complete group of Recessed Direct luminaires featuring a centered metal perforated lamp shield with an acrylic overlay to obscure direct lamp image. The centered perforated lamp shield is positioned above the ceiling plane. Lamp output is distributed over a computer designed reflector system to provide soft glare-free illumination. The NAS-PI series can be used in any installation where high performance and comfortable lighting are required.

SPECIFICATIONS

- Housing:** Die formed 20-gauge cold rolled steel finished in baked white enamel. Housing has an access plate on top with two 7/8" diameter knockouts.
- Shielding:** Die formed 20 gauge perforated steel lamp shield has a 41% opening with white acrylic .020 translucent overlay. The hinged lamp shield is removable for easy lamp access.
- Reflector:** Die formed .020 aluminum 90% minimum reflectivity finished in low glare matte baked white enamel.
- Electrical:** Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% total harmonic distortion. The minimum number of ballasts will be used unless otherwise specified.
- Mounting:** Standard installation is 2 x 4 exposed inverted T-bar ceiling. Optional trims are also available for installations in miniature grid, drywall or plaster ceiling. For mounting detail information consult factory. Four support brackets are included with each fixture.
- Finish:** Fixture housing and steel components are finished in baked white enamel applied over a five-stage pretreatment process.
- Lamps:** Fixtures are provided for use with 40 or 50 watt compact fluorescent or 32 watt T8 lamps. (Supplied by Others)
- Certification:** Luminaires are U. L. Listed, C.S.A. certified and are Union Made in the United States of America I.B.E.W.

ORDERING GUIDE

MODEL NO.	LAMPS	SIZE	MOUNTING	FINISH	VOLTAGE	OPTIONS
NAS-PI		24				
NAS-PI	440-CF 450-CF 232-T8	24= 2X4	G= Standard Lay-in Grid MG= Miniature Grid F= Flanged	W= White CC= Custom Color	120v 277v	See Options Below
	O=Other Specify					

Example: **NAS-PI-232-T8-24-G-W-277V**
New Age Series with perforated lamp shield two 32 watt T8 fluorescent 2x4 grid fixture finished in baked white enamel 277 volt electronic ballast less than 20% harmonics.

OPTIONS


- E10=** Electronic ballast, high power factor, thermally protected class P, sound rated A, <10% total harmonic distortion
- DIM=** Dimming Ballast
- EPC=** Emergency Battery Pack
- EMC=** Emergency Circuit
- TCW=** Two Circuit Wiring
- ARS=** Air return system
- FWH=** Flexible wiring harness
- OTH=** See Accessory Section for other options available

New Age Series

NAS-PI


LINEAR SECTIONS AND SUSPENSION LOCATION

MOUNTING "G"

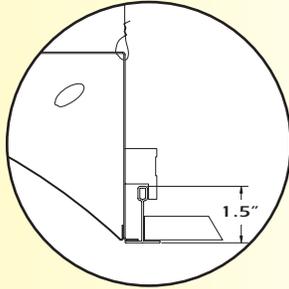


STD. 1 1/2" INVERTED "T" BAR

MOUNTING "MG"

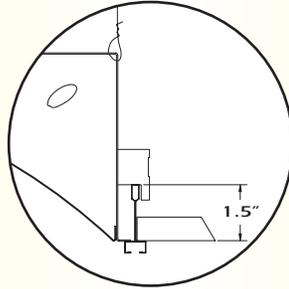


1 1/2" MINIATURE GRID CEILING

MOUNTING "F"

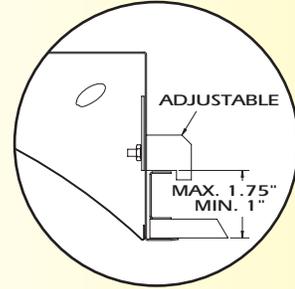


PLASTER OR DRY WALL CEILING


INSTALLATION PREPARATION

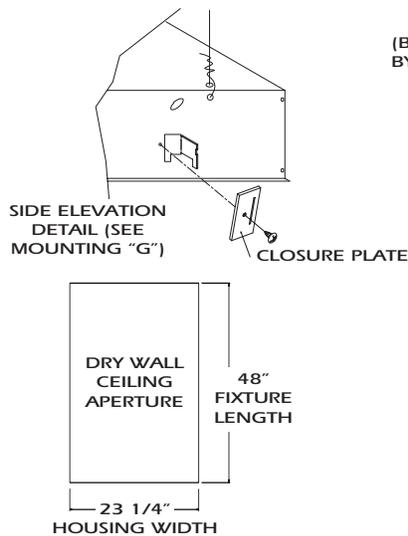

WIRE TIES OR CHAINS
(BY OTHERS AS REQUIRED
BY NATIONAL AND LOCAL
ELECTRICAL CODES)

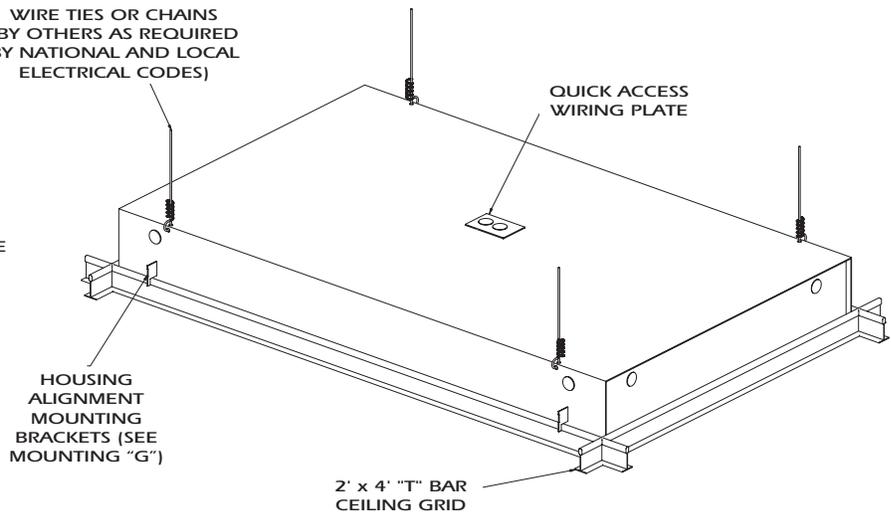

PHOTOMETRY

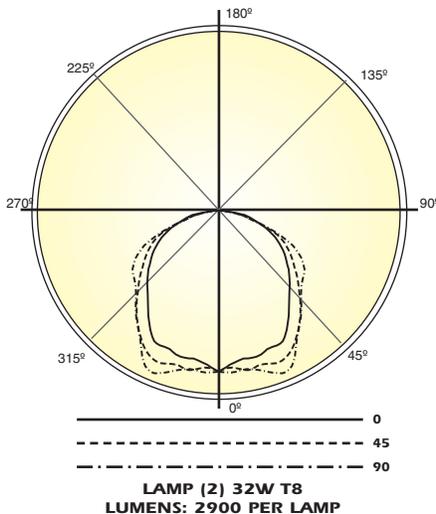

Candela Distribution:

Vert. Angle	0	22.5	45	67.5	90
0	1209	1209	1209	1209	1209
5	1135	1211	1134	1229	1197
10	1136	1161	1203	1240	1201
15	1139	1116	1197	1261	1258
20	1105	1123	1221	1283	1325
25	1056	1136	1208	1294	1303
30	1020	1056	1158	1191	1150
35	900	979	1059	1074	1062
40	810	893	962	971	972
45	722	819	866	859	892
50	662	737	768	801	830
55	593	646	685	761	792
60	520	577	597	709	721
65	442	486	535	602	622
70	375	388	420	443	422
75	282	293	284	256	246
80	189	187	158	167	174
85	90.3	79.0	84.0	83.2	79.7
90	17.8	15.5	14.0	17.2	12.4

Optical Distribution:
100% Direct

Coefficients of Utilization - Zonal Cavity Method:

pfc = 0.20

	.8	.7	.5	.3	.1	0												
pcc	.8	.7	.5	.3	.1	0												
pw	.7	.5	.3	.1	.5	.3	.1	.5	.3	.1	0							
RCR																		
0	78	78	78	78	76	76	76	76	73	73	73	70	70	70	67	67	67	66
1	71	68	65	62	69	66	64	61	64	61	59	61	59	57	59	57	56	54
2	64	59	54	50	63	57	53	50	55	51	48	53	50	47	51	48	46	45
3	59	51	46	41	57	50	45	41	48	44	40	46	43	39	45	41	39	37
4	53	45	39	35	52	44	39	34	43	38	34	41	37	33	40	36	33	31
5	49	40	34	30	48	40	34	29	38	33	29	37	32	29	36	32	28	27
6	45	36	30	26	44	35	30	26	34	29	25	33	29	25	32	28	25	23
7	42	33	27	23	41	32	26	22	31	26	22	30	26	22	29	25	22	21
8	39	30	24	20	38	29	24	20	28	23	20	28	23	20	27	23	20	18
9	36	27	22	18	35	27	21	18	26	21	18	25	21	18	25	21	18	16
10	34	25	20	16	33	25	20	16	24	19	16	23	19	16	23	19	16	15



Total Luminaire Optical
Efficiency = 66.1%

SCW-2