

Crescent Moon

CRES



TYPE

FEATURES

The Crescent Moon is an innovative architecturally designed wall sconce using aluminum and steel to create its unique design. It is designed to meet the American Disability Act. It mounts flush to the wall at each end and bevels out ever so gently with its sleek styling. The Crescent Moon beveled ends make it yet another safety feature for many applications. The high quality luminaire is suitable for horizontal or vertical mounting. The Crescent Moon is almost limitless in variety of selections of lamps and shielding to allow the versatility required in architectural design.

SPECIFICATIONS

- Housing:** A two piece construction of heavy gauge extruded aluminum 6063T5 that is 1/8" thick, which is attached to a 20-gauge steel housing for rigid wall mounted construction.
- Shielding:** Variations of shielding are offered from a white .020 transparent overlay to perforated metal. See shielding sheet for perforation options.
- Reflector:** A variable reflector system is designed into the series allowing the lighting to be controlled up or down to meet the aesthetic needs of the project.
- Electrical:** Ballast is electronic, high power factor, thermally protected class P, sound rated A, with less than 20% harmonic distortion. The minimum ballast will be used unless otherwise specified.
- Mounting:** Provided with wall mounting key slots and mounts to a standard switch box or conduit feed.
- Finish:** The steel components are finished in Candlelight Silver baked enamel applied over a five-stage pretreatment process. The aluminum fascia is polished natural aluminum clear coated.
- Lamps:** Fixtures are supplied with the use of one or two lamps in T5 and one lamp in compact fluorescent. Incandescent lamps are also available.
- Certification:** Luminaires are U. L. Listed, C. S. A. certified and are Union Made in the United States of America I. B. E. W.

ORDERING GUIDE

MODEL NO.	PROFILE	SHIELDING	NO. OF LAMPS	LAMPS	MOUNTING	LENGTH	FINISH	VOLTAGE	OPTIONS
CRES	O= Open	WOA= White Opal [For 'A' Profile]	1	9W CF	WM= Wall Mounted	1.5= Ft	AL= Polished Natural Aluminum	120v	See Options Below
CRES	A= Shielding Top and Bottom	Perforations See Shielding Chart [For 'A' Profile]	2* *[T5-] T5HO Only	13W CF 18W CF 36W CF 40W CF 14W T5 24W T5HO 21W T5 39W T5HO 28W T5 54W T5HO	S= Surface Mounted	2= Ft 3= Ft 4= Ft 5= Ft	CC= Custom Color	277v	
	B= Louver on Bottom	SCB= Steel Cross Blade [For 'B' Profile Only]							

Example: **CRES-O-124-T5HO-WM-2'-AL-120**
 Crescent Moon open for one 24 watt T5 HO lamp, wall mounted fixture finished in a fine polished natural aluminum with 120 volt electronic ballast less than 20% total harmonic distortion.


OPTIONS

- EMC=** Emergency Circuit
- TCW =** Two Circuit Wiring
- LSU =** Lamp Shield Up Light
- LSD =** Lamp Shield Down Light
- DCS=** Dust Cover Up Light

Crescent Moon


CRES

LINEAR SECTIONS AND SUSPENSION LOCATION

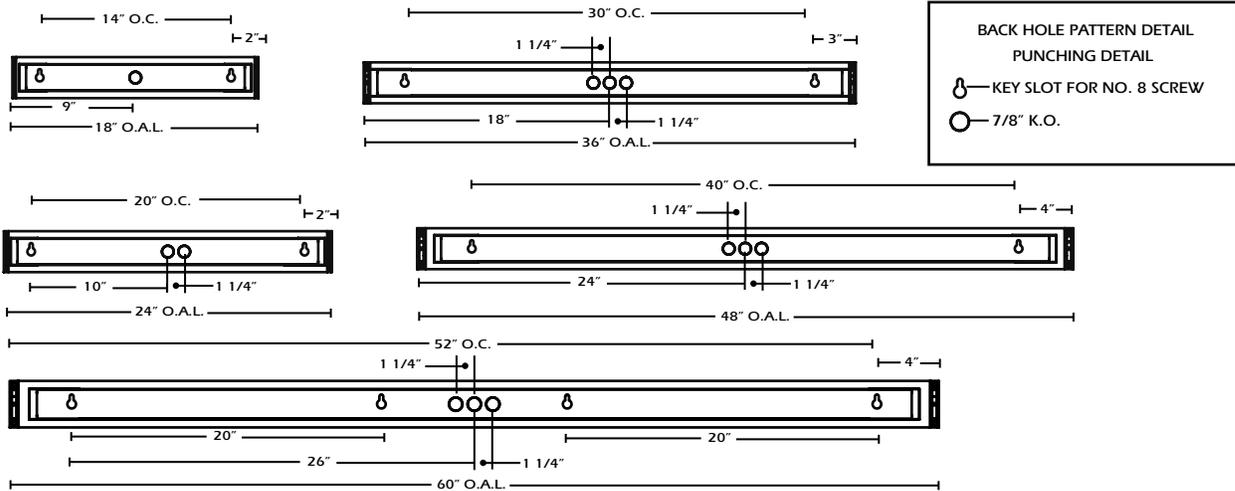


COMPACT FLUORESCENT

ONE LAMP OPTION

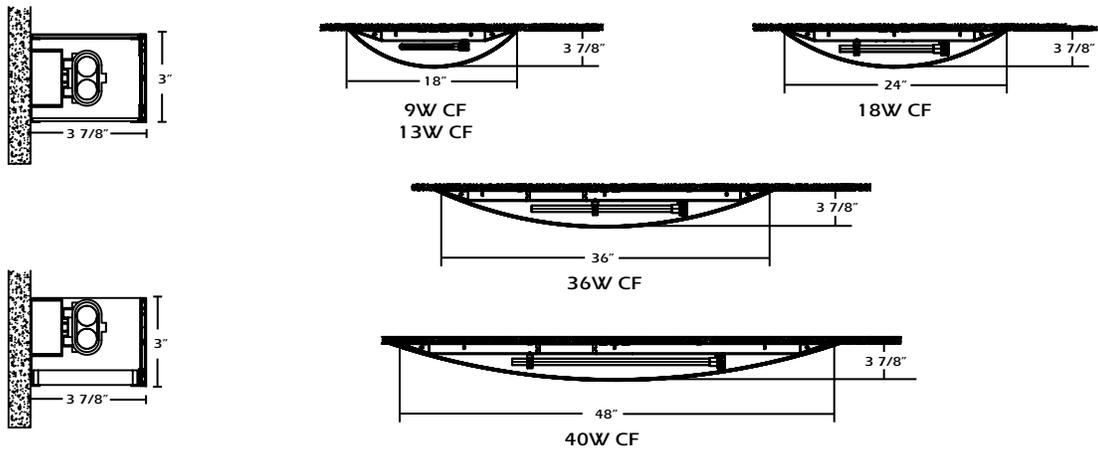

T5 FLUORESCENT

ONE OR TWO LAMP OPTION

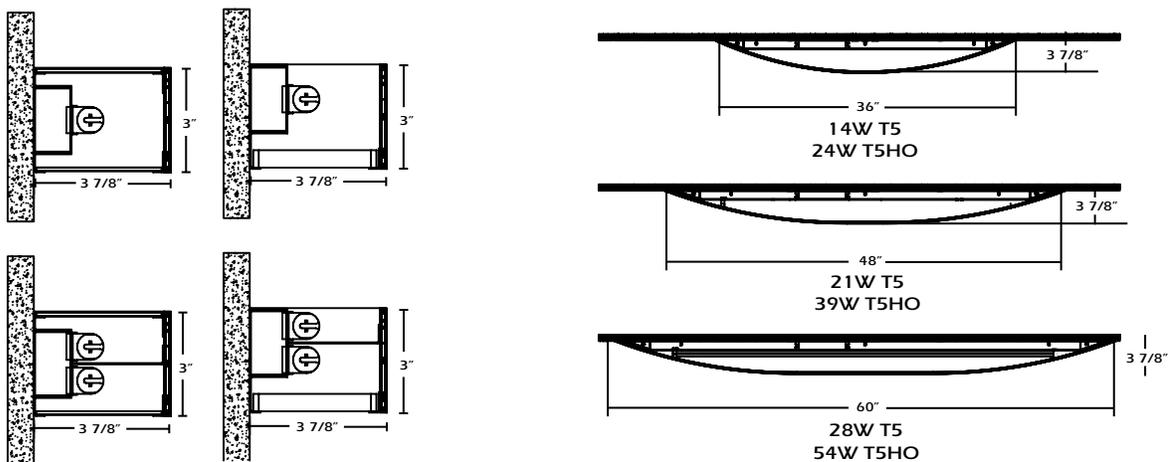

SCW-2