


Kalifa wall

Ernesto Gismondi 2008

Wall mounted luminaires for direct and indirect lighting.

- body in extruded aluminum with white or grey painted finish and 3/16" (0.4 cm) thick screen-printed tempered glass
- light distribution: 81% indirect and 19% direct
- equipped with thermally protected, class P, high power factor 120V electronic fluorescent ballast
- white backplate provided to cover junction box
- mounting to wall surface, over standard electrical junction box
- for 277/347V electronic fluorescent ballast, dimmable electronic ballast, and emergency lighting options, please consult your Artemide Sales Representative


for additional information on this model and matching Kalifa series, please refer to the Artemide Architectural Binder

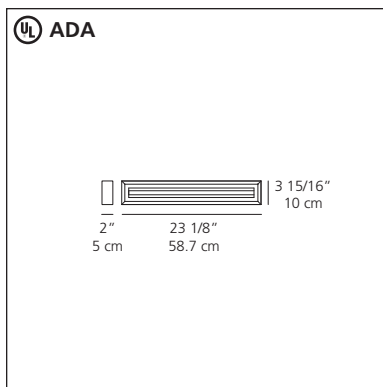

Kalifa 23 wall

fluorescent source

- 1 x 24W (G5/T5 HO).....

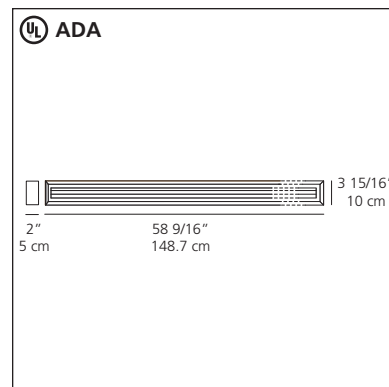

Kalifa 59 wall

fluorescent source

- 1 x 80W (G5/T5 HO).....

eco♥design

Artemide
ARCHITECTURAL INDOOR

