

Mikado track system

F.A. Porsche

Stem mounted, low voltage track system for directional halogen spotlighting.

Track

- double extruded aluminum profile track (line and neutral) with anodized finish in grey or black
- standard track lengths are 39" (100cm), 79" (200cm), 118" (300cm) with custom lengths available (max. 118")
- track is supported by electrified suspension feeder double rod and non-feeder single rod in chromed brass, standard lengths of 13", 25" and 48" which may be field cut for shorter length requirements
- feeder double rod in chromed brass connects to 120/12V transformer of 300W or 500W incorporated in ceiling canopy or 250W or 500W for remote installation (277/12V optional for remote installation)
- ceiling canopy housing transformer and support canopy in grey thermoplastic
- ceiling canopy mounts to standard electrical junction boxes, and support canopy mounts to rigid ceiling surface


Track Spotlights

- fully adjustable, low voltage spotlights with body in die-cast aluminum with metallic light grey lacquered finish with incorporated lamp rim in matte black lacquered steel available in two diffuser sizes: $\varnothing 12\text{cm}$ ($4\frac{3}{4}"$) and $\varnothing 16\text{cm}$ ($6\frac{1}{4}"$), with or without extension rods
- curved supporting arms and extension rods in chromed steel
- the Mikado track system is complemented by wall, ceiling and suspension mounted single spotlighting luminaires, utilizing the same body/diffuser design.

LISTING

Intertek ETL

Report No. 525256

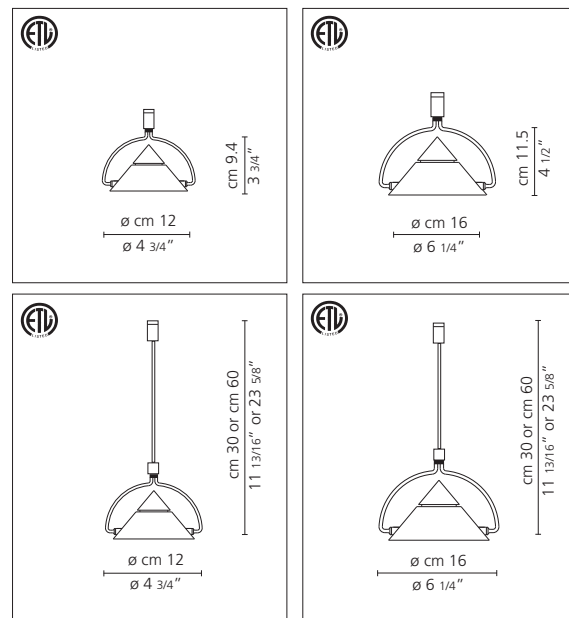

Mikado track spotlight
 $\varnothing 12\text{cm}$ ($4\frac{3}{4}"$)

Mikado track spotlight
 $\varnothing 16\text{cm}$ ($6\frac{1}{4}"$)

low voltage halogen source

- 1x50W/12V
(GU5.3/MR16 lensed)

low voltage halogen source

- 1x75W/12V
(GU5.3/MR16 lensed)

