

TAGORA

design S. & R. CORNELISSEN





TAGORA



Ø80 x 330MM




Ø570 x 190MM



Ø270 x 330MM


- A RANGE OF CEILING LIGHTS AVAILABLE IN THREE DIAMETER OPTIONS (80MM, 270MM AND 570MM), USING 12V HALOGEN, METAL HALIDE AND FLUORESCENT.
- ALUMINIUM BODY WITH 3 MIXED COLOUR OPTIONS: BEIGE/WHITE, GREY/WHITE AND BLACK/ORANGE.
- TAGORA 570 COMES WITH AN OPALINE POLYCARBONATE DIFFUSER, ANTI-UV TREATED.
- HIT VERSION INCLUDES PROTECTION GLASS.
- LAMPS CAN BE MAINTAINED WITHOUT THE NEED FOR TOOLS.
- ELECTRONIC CONTROL GEAR.

TAGORA 80

			
		⏚ ⚡ IP20 960°  black/orange  beige/white  grey/white	
MR16 (GU5,3)  CDMR16 (GX10) 	CODE	LIGHT SOURCE	WEIGHT
	USC-M018218H01CE*	MR16 (GU5,3) 12V 1xmax35W 	2,80kg
	USC-M018228H01CE*	MR16 (GU5,3) 12V 1xmax35W 	2,80kg
	USC-M018268H01CE*	MR16 (GU5,3) 12V 1xmax35W 	2,80kg
	USC-M018318S01CE	CDMR16 (GX10) 1xmax20W 	2,80kg
	USC-M018318S01CE	CDMR16 (GX10) 1xmax20W 	2,80kg
	USC-M018318S01CE	CDMR16 (GX10) 1xmax20W 	2,80kg
*Integral electronic transformer, 20-70W, 120V/12V. Class II. Dimmable by trailing edge external dimmers.			




TAGORA 270

				
	  IP20 960°  black/orange  beige/white  grey/white			
CFL (G24q-3) 26W = 1800lm		CODE	LIGHT SOURCE	WEIGHT
		USC-M018518S00CE	CFL (G24q-3) 2x26Wnon dimmable 	4,30kg
MHT6 70W = 6600lm 35W = 3300lm		USC-M018528S00CE	CFL (G24q-3) 2x26Wnon dimmable 	4,30kg
		USC-M018568S00CE	CFL (G24q-3) 2x26Wnon dimmable 	4,30kg
		USC-M018718H00CE	MHT6 (G12) 1x70W medium 	4,30kg
		USC-M018718S00CE	MHT6 (G12) 1X35W medium 	4,30kg
		USC-M018728H00CE	MHT6 (G12) 1x70W medium 	4,30kg
		USC-M018728S00CE	MHT6 (G12) 1X35W medium 	4,30kg
		USC-M018768H00CE	MHT6 (G12) 1x70W medium 	4,30kg
		USC-M018768S00CE	MHT6 (G12) 1X35W medium 	4,30kg
		USC-M018818H00CE	MHT6 (G12) 1x70W flood 	4,30kg
		USC-M018818S00CE	MHT6 (G12) 1x35W flood 	4,30kg
		USC-M018828H00CE	MHT6 (G12) 1x70W flood 	4,30kg
		USC-M018828S00CE	MHT6 (G12) 1x35W flood 	4,30kg
		USC-M018868H00CE	MHT6 (G12) 1x70W flood 	4,30kg
		USC-M018868S00CE	MHT6 (G12) 1x35W flood 	4,30kg


TAGORA 570



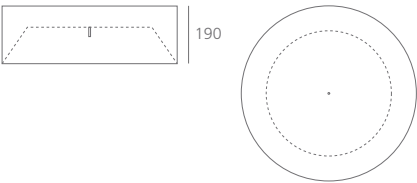

190

Ø570




90° 90° 30 60 90

CFL (2G11) Cd/Klm

CFL (2G10)
36W = 2900lm
18W = 1250lm



CODE	LIGHT SOURCE	WEIGHT
USC-M018118H00CE	CFL (2G10) 4x36W non dimmable 	6,00kg
USC-M018118S00CE	CFL (2G10) 4x18W non dimmable 	6,00kg
USC-M018128H00CE	CFL (2G10) 4x36W non dimmable 	6,00kg
USC-M018128S00CE	CFL (2G10) 4x18W non dimmable 	6,00kg
USC-M018168H00CE	CFL (2G10) 4x36W non dimmable 	6,00kg
USC-M018168S00CE	CFL (2G10) 4x18W non dimmable 	6,00kg



CFL (2G11) Cd/Klm