

Tolomeo off-center suspension

design

Michele De Lucchi
Giancarlo Piretti
1996

Artemide
www.artemide.net

Light emission



Colors



aluminum



fiber



parchment

Ceiling suspended luminaire for adjustable directional incandescent or fluorescent lighting, developed to offer maximum flexibility of adjustment in the positioning of the light source.


Materials: fully articulated arm in extruded natural polished anodized aluminum • joints and tension control knobs in polished die-cast aluminum, cables in stainless steel • rotatable ceiling supporting canopy in anodized matte aluminum • diffusers available: anodized matte aluminum in $\varnothing$ 8" (20 cm), parchment paper in $\varnothing$ 10" (25 cm), $\varnothing$ 12" (30.4 cm), $\varnothing$ 14" (36 cm) or $\varnothing$ 17" (42 cm) • mounting to standard electrical junction boxes • newly redesigned to incorporate compact fluorescent option utilizing GU24 base with integrated ballast and lampholder

Suspension à éclairage incandescent ou fluorescent directionnel ajustable, conçue pour offrir un maximum de flexibilité quant au positionnement de la source lumineuse.

Luminaria de techo para iluminación incandescente o fluorescente direccional ajustable, diseñada para ofrecer máxima flexibilidad de ajuste en el posicionamiento de la fuente de luz.

Matériaux: bras entièrement articulés, en aluminium naturel anodisé et extrudé poli • articulations et vis de tension de la tension en aluminium moulé poli, câbles en acier inoxydable • monture de soutien pivotante pour le plafond, en aluminium anodisé mat • diffuseurs offerts: aluminium anodisé mat avec diamètre de 8 po (20 cm), papier parchemin avec diamètre de 10 po (25 cm), de 12 po (30,4 cm), de 14 po (36 cm) ou de 17 po (42 cm) • se fixe aux boîtes de connexion électrique standard • modèle repensé compatible avec les ampoules fluorescentes compactes, base GU24 avec ballast et douille de lampe intégrés

Materiales: brazo completamente articulado de aluminio anodizado natural pulido y extruido • articulaciones y perillas de control de tensión de fundición de aluminio pulido, cables de acero inoxidable • cubierta de soporte de techo giratoria de aluminio mate anodizado • difusores disponibles: aluminio mate anodizado de $\varnothing$ 8" (20 cm), papel encerado de $\varnothing$ 10" (25 cm), $\varnothing$ 12" (30,4 cm), $\varnothing$ 14" (36 cm) o $\varnothing$ 17" (42 cm) • montaje en cajas de conexiones estándar • nuevo diseño que incorpora una opción fluorescente compacta que utiliza la base GU24 con balasto y portalámpara integrados

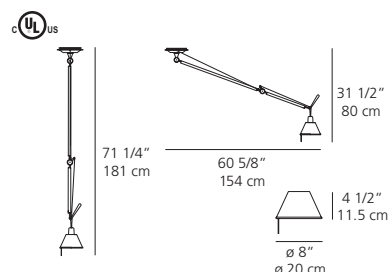

Tolomeo off-center suspension
(aluminum diffuser)



incandescent source

- 1 x 100W (E26/A19)

or

fluorescent source

- 1 x 13W (GX24q-1/T4)

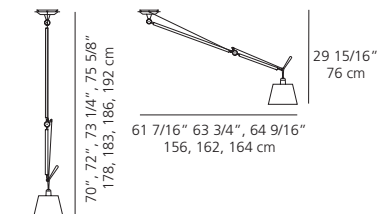

Tolomeo off-center suspension
(parchment and fiber diffusers)

incandescent source

- 1 x 100W (E26/A19)

or

fluorescent source

- 1 x 18W (GX24q-2/T4)

