

Landscape Areas
Path Lighting
Walkway Lighting
Accent Lighting



Specifications



- Certifications** ETL and CETL listed for wet location, direct burial, and concrete pour.
- Lamp Housing** Cast aluminum, minimum wall thickness of 3/16".
- Composite Ballast Housing** Compression molded Rhinolite™ composite material, structurally reinforced with glass fibers. Superior resistance to ultra violet degradation and corrosion resistant in harsh environments. 1/4-20 stainless steel cap screws and sealed with high temperature silicone gasket. Supplied with two 3/4" NPT conduit entrances and separated from the ballast compartment by the anti-wicking chamber hermetically sealed with high temperature sealing compound. (Supplied with HID fixtures).
- Lens** Clear prismatic tempered, sealed to lens guard with high temperature silicone.
- Lens Guard** Cast aluminum fastened to housing with three 1/4-20 stainless steel flat head screws.
- Lens Cover Plate** Cast aluminum fastened to lens guard with three 1/4-20 stainless steel flat head screws.
- Lampholder** Porcelain 4KV pulse rated medium base, for HID and Incandescent lamp source.
- Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.
- Safety** Caution: Care should be taken when specifying fixtures for use in pedestrian areas to avoid problems that may be caused by high lens temperatures. Consult factory for more information.
- Warnings** Caution: Care should be taken not to install in-ground ballast housings in areas where water can stand for prolonged periods of time. Sufficient drainage must be provided to avoid problems. Consult factory for more information.
- Caution: Care should be taken in the placement of the Pathlight to avoid pedestrian trip hazards. Consult factory for more information.

PROJECT
FIXTURE TYPE
CATALOG#

Product Order Guide


Series	Max Watts	Lamp Type ²	Voltage ¹	Finish ¹	
SL-21	100 INC	A19	120	BK Black	
	13 CFQ	CFQ ²	208	BZ Bronze	
	42 CFT	CFT ²	240	WH White	
	70 HPS	E-17	277	GR Green	
	70 MH		E-17		NA Natural Alum
					GY Gray
				CC Custom Color	

1 Consult factory for other colors and voltages (Note SL-21 INC 120v only)

2 CFQ = double biax, CFT = triple biax

Example: SL-21-70MH-E17-BZ-CBH

Photometric Data

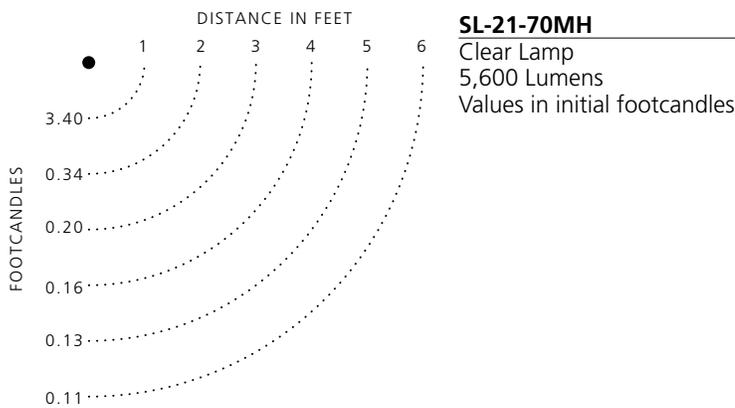

Luminaire Dimensions

Luminaire	A	B	C	D
SL-21-INC	9"	6-3/4"	4-1/2"	3-5/8"
SL-21-CBH	9-1/4"	6-3/4"	12"	3-5/8"

