

**Landscape Areas**  
**Path Lighting**  
**Walkway Lighting**  
**Accent Lighting**



**PATHLIGHT**

SL

### **Specifications**

---



**Certifications** ETL and CETL listed for wet location. Also meets IP65 standard.

**Lamp Housing** Dual wall die-cast aluminum construction.

**Lampholder** Porcelain 2-pin G12, with lamp retaining clips.

**Lens** Clear tempered glass and sealed to the housing with high temperature silicone gasket.

**Options** The following options are available: single or double aperture.

**Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

**Safety** Caution: Care should be taken when specifying fixtures for use in pedestrian areas to avoid problems that may be caused by high lens temperatures. Consult factory for more information.

**Warnings** Caution: Care should be taken not to install ground level fixtures in areas where water can stand for prolonged periods of time. Sufficient drainage must be provided to avoid problems. Consult factory for more information.

Caution: Care should be taken in the placement of the Pathlight to avoid pedestrian trip hazards. Consult factory for more information.

PROJECT
FIXTURE TYPE
CATALOG#



**Product Order Guide**

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>1</sup>	Options
SL-60	70 MH	T6	120/277 <sup>2</sup>	BZ Bronze BK Black WHWhite GR Green NA Natural Alum. GY Gray CC Custom Color	SL Single Side Lens DL Double Side Lens @ 180°

<sup>1</sup> Consult factory for other colors and voltages  
<sup>2</sup> Dual Tap Ballast only

**Example: SL-60-70MH-T6-120-BK-DL**

**Photometric Data**

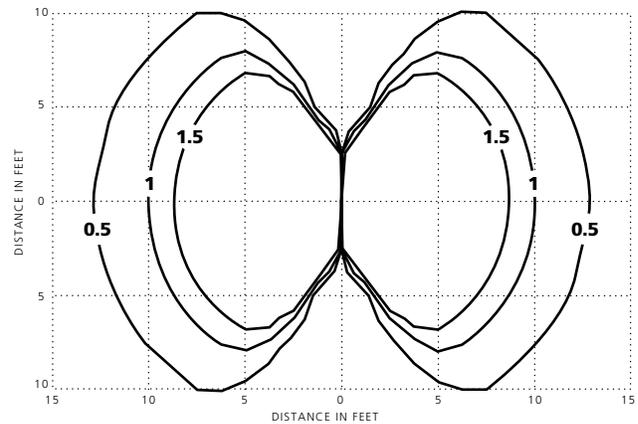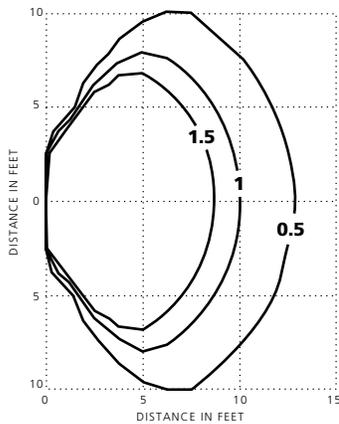

**SL-60-70MH-SL**

LLab Test Report 1202-4B 70 Watt Metal Halide CDM/T6

Lamp	Lumens	Conversion Factor
70Watt Metal Halide	6600	1
39Watt Metal Halide	3400	0.52




**SL-60-70MH-DL**

LLab Test Report 1202-4A 70 Watt Metal Halide CDM/T6

Lamp	Lumens	Conversion Factor
70Watt Metal Halide	6600	1
39Watt Metal Halide	3400	0.52

**Luminaire Dimensions**

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SL-60-SL	7.00"	178	10.50"	267	9.00"	229	16lbs	7.3kg
SL-60-DL	7.00"	178	10.50"	267	9.00"	229	16lbs	7.3kg

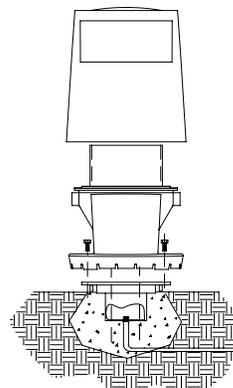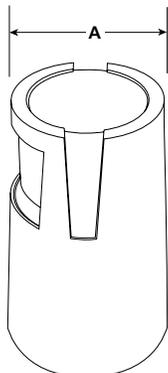

Mounting Detail  
1/2" or 3/4"  
Conduit by  
Others