
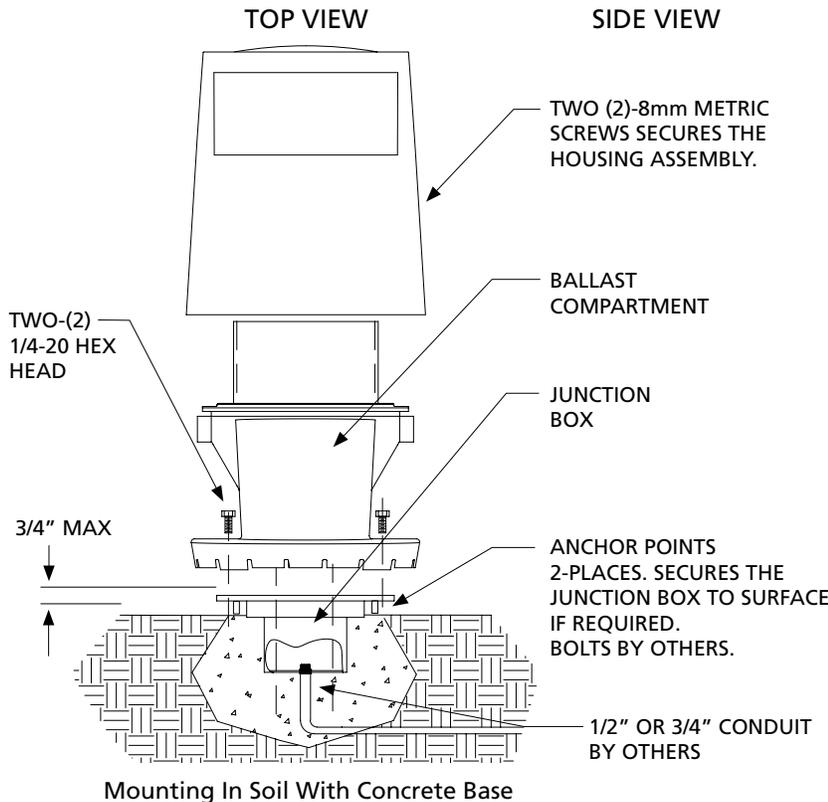


INSTALLATION SHEET

Safety, Warnings and Suggestions

- ¹ **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- ² **Avoid** installing fixtures in locations where water collects and stands for prolonged periods.
- ³ **Make** sure that electrical power is disconnected before any work is performed.
- ⁴ **All** gaskets and sealing surfaces must be kept clean during installation.
- ⁵ **All** wiring and installation should meet local, state and national electrical codes.
- ⁶ **Install** correct lamp type and wattage.

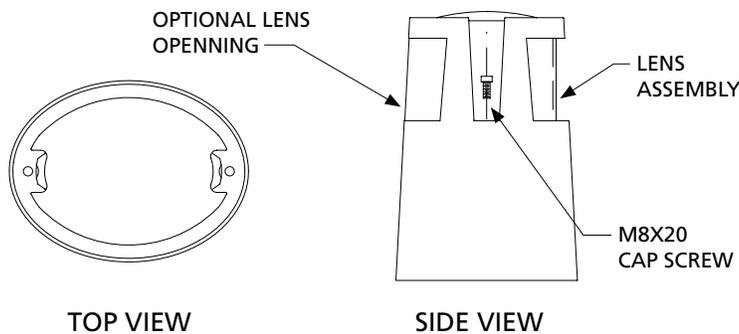

1. Prepare the site with adequate excavation.
2. Remove the fixture from box and unscrew two 8mm screws using a 6mm allen key and remove the housing. Remove the junction box by removing two 1/4-20 hex head bolts.
3. Connect conduit and install the junction box and bolts if required for extra strength and level. It is suggested that the junction-box is set in concrete for strength.
3. Take the ballast compartment and make power and ground connection using the supplied water-proof connectors. Secure it to the junction box with the (2)-1/4-20 hex bolts.
4. Install the correct lamp type and wattage. **MAKE SURE THAT THE CYLINDER GLASS LENS IS PROPERLY SEATED WITH THE GASKET IN PLACE.** Reinstall the housing cover with the (2)-8mm bolts.