



**Corridor**  
**Walkways**  
**Accent**  
**General Lighting**

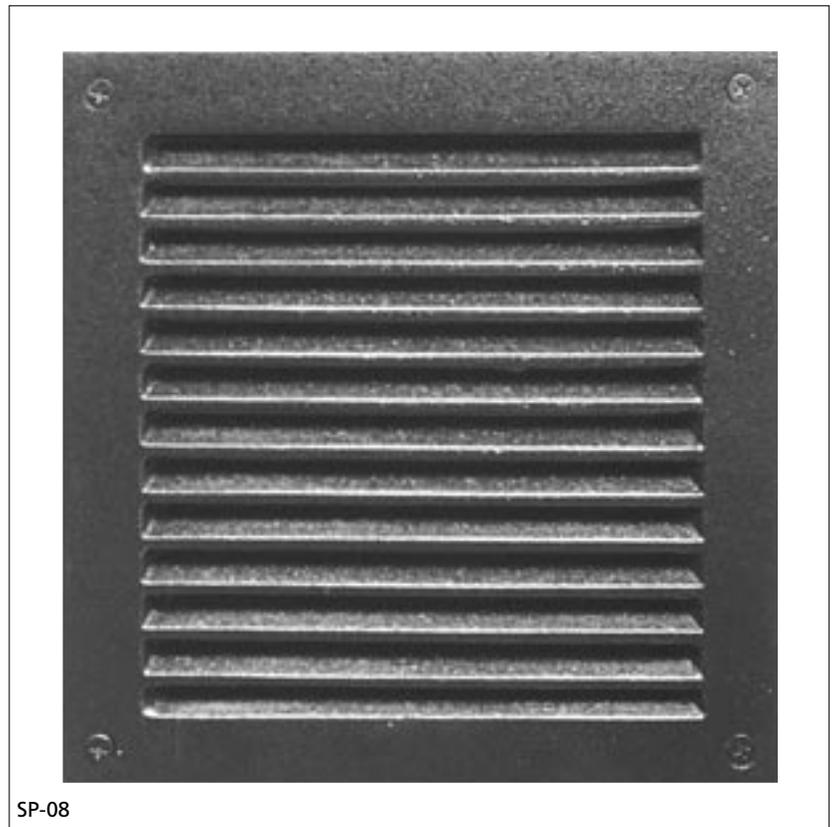

SP

**Specifications**

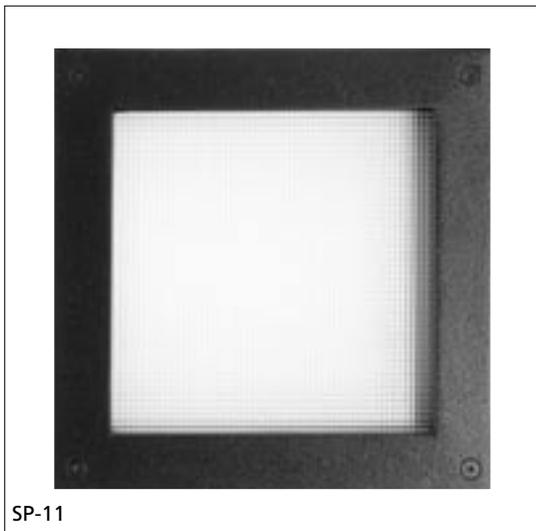

**Certifications**

The fixture shall be ETL and CETL listed for wet location and concrete pour. The fixture shall meet ADA requirements.

**Lamp/Ballast Housing**

Cast aluminum with two 3/4" NPT conduit entrances for through-wiring capability.

**Lens Frame**

Cast aluminum, with directional louvers (SP-08), fastened to lamp/ballast housing with two stainless steel tamper resistant screws.

**Lens**

Tempered prismatic glass sealed to lamp/ballast housing with extruded closed cell EDPM gasket.

**Lampholder**

Porcelain 4KV pulse rated medium base, for HID and Incandescent lamp source.

**Reflector**

Highly specular Alzak®, aluminum.

**Finish**

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 allighting@earthlink.net  
 http://www.allighting.com

# SP-08/11

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>1</sup>
SP-08	100 INC	A19	120	BK Black
SP-11	100 HPS	E17	208	BZ Bronze
	100 MH	E17	240	WH White
	(2) 26 CFQ	CFQ <sup>2</sup>	277	GR Green
	42 CFT	CFT <sup>2</sup>		NA Natural Aluminum
	(2) 13 CF	CF <sup>2</sup>		GY Gray
				CC Custom Color

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> CF = single biax, CFQ = double biax, CFT = triple biax

## Example: SP-08-35HPS-E17-120-BK

## Photometric Data

SP-08-50MH  
 Test height 4ft above grade  
 Clear Lamp 3500 Lumens

Values In Initial Footcandles

1	2.500	1.063	0.175	0.039	0.009	0.004	0.006
2	1.031	0.750	0.325	0.094	0.031	0.013	0.008
3	0.438	0.294	0.200	0.088	0.031	0.015	0.009
4	0.188	0.156	0.097	0.060	0.028	0.015	0.008
5	0.078	0.069	0.044	0.029	0.021	0.013	0.006
6	0.047	0.039	0.034	0.024	0.019	0.010	0.003

0 1 2 3 4 5 6  
 Distance in mounting Height

SP-11-50MH  
 Test height 4ft above grade  
 Clear Lamp 3500 Lumens


Values In Initial Footcandles

1	5.63	2.88	0.50	0.11	0.05	0.03	0.02
2	2.50	1.81	0.75	0.23	0.08	0.05	0.03
3	1.25	1.00	0.56	0.26	0.11	0.06	0.04
4	0.63	0.53	0.38	0.21	0.11	0.07	0.04
5	0.38	0.31	0.23	0.16	0.10	0.06	0.04
6	0.22	0.19	0.15	0.11	0.08	0.06	0.04
7	0.16	0.12	0.10	0.08	0.06	0.04	0.03
8	0.11	0.09	0.08	0.06	0.04	0.03	0.03

0 1 2 3 4 5 6  
 Distances in mounting heights

## Conversion Chart

	3'	4'	5'	6'
Conversion Factor				
50MH 3500 Lumens	1.78	1	0.64	0.44
70HPS 5600 Lumens	2.84	1.60	1.02	0.70

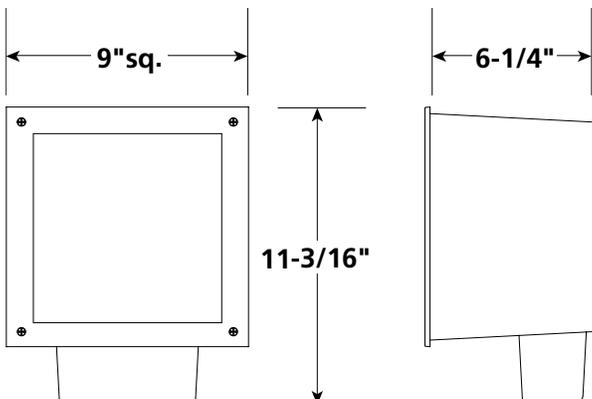

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 Email: allighting@earthlink.net