

Corridor
Walkways
Accent
General Lighting



Specifications



Certifications

The fixture shall be ETL and CETL listed for wet location and concrete pour. The fixture shall meet ADA requirements.

Lamp/Ballast Housing

Die-cast aluminum with two 3/4" NPT conduit entrances for through-wiring capability.

Face Plate

Die-cast aluminum, recessed with louvers, fastened to lamp/ballast housing with four stainless steel screws.

Lens

Tempered clear glass sealed to face plate with silicone.

Lampholder

Porcelain 4KV pulse rated medium base, for HID and Incandescent lamp source.

Reflector

Highly specular Alzak[®], aluminum.

Finish

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 allighting@earthlink.net
 http://www.allighting.com

SP-10


Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹	Options	
SP-10	175 MH	E17	120	BK	Black	QS Quartz Standby
	150 HPS	E17	208	BZ	Bronze	EMG Emergency battery Backup
	26 CFQ	CFQ ²	240	WH	White	
	42 CFT	CFT ²	277	GR	Green	
	13 CF	CF ²		NA	Natural Aluminum	
	18 LPS	T17		GY	Gray	
				CC	Custom Color	

- 1 Consult factory for other colors and voltages
- 2 CF = single biax, CFQ = double biax, CFT = triple biax

Example: SP-10-100HPS-E17-120-BK

Photometric Data

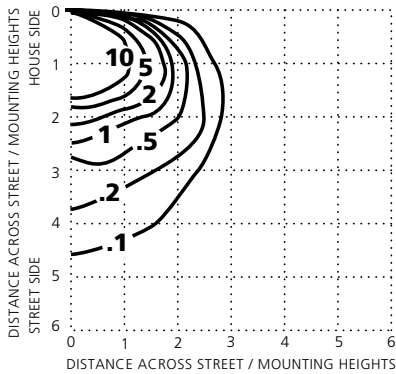

Conversion Factors
Lamp Type

Lamp Type	Lumens	Mounting Height				
		2.00	3.00	4.00	5.00	6.00
175W CTD MH	15000	4.00	1.78	1.00	0.64	0.44
100W CTD MH	8500	2.27	1.01	0.57	0.36	0.25
70W CTD MH	5300	1.41	0.63	0.35	0.23	0.16
150W CTD HPS	15000	4.00	1.78	1.00	0.64	0.44
100W CTD HPS	8800	2.35	1.04	0.59	0.38	0.26
70WCTD HPS	5950	1.59	0.71	0.40	0.25	0.18

SP-10-175MH

w/coated lamp (CTD)

4' Mounting Height

ISOLUX Curve—value in initial footcandles

