



Corridors
Walkways
Accent and
General Lighting



SP-105

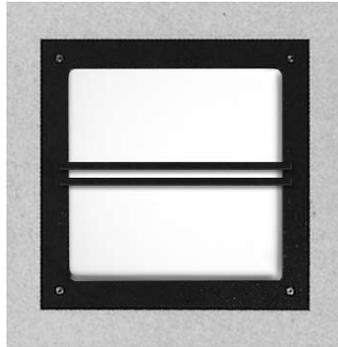

SP-106

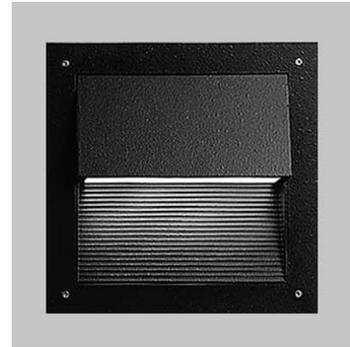

SP-107

METRIC

SP

Specifications

ETL, CETL, ADA, IP65

Certifications

The fixture shall be ETL and CETL listed for wet location and concrete pour with a protection rating of IP65, dust-tight and jet-water proof. The fixture shall meet ADA requirements.

Housing

The housing shall be constructed of die cast aluminum with two 1/2" NPT conduit entrances for through-wiring capability.

Ballast

The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.

Lens

The lens shall be opal polycarbonate (SP-105 and SP-106). The lens shall be clear glass (SP-107).

Hardware

All exposed hardware shall be stainless steel.

Finish

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 sales@allscape.net
 http://www.allighting.com

SP-105/106/107

Product Order Guide


Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹
SP-105 / SP-106	13 CF	CF ²	120	BK Black
	2(13) CF	CF ²	208	BZ Bronze
	26 CFQ	CFQ ²	240	WH White
	42 CFT	CFT ²	277	GR Green
				NA Natural Aluminum
			GY Gray	
				CC Custom Color
SP-107	75 Halogen 13 CF 26 CFQ	T3mini CF ² CFQ ²		

¹ Consult factory for other colors and voltages


² CF = single biax, CFQ = double biax, CFT = triple biax

Example: SP-105-13CF-120-BK-PL


Photometric Data

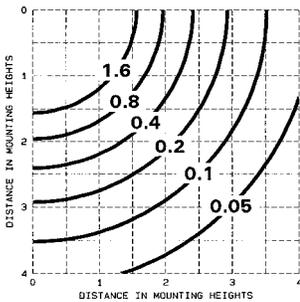

SP-105-(2)13CF-GL
 1,720 Lumens
 3.0 ft Mounting Height
 ISOLUX Curves - value in initial footcandles

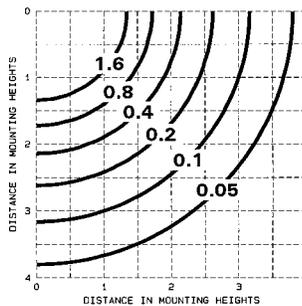


SP-106-60INC-GL
 890 Lumens
 3.0 ft Mounting Height
 ISOLUX Curves - value in initial footcandles

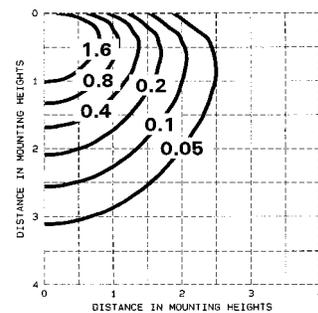


SP-107-13CF-BK
 860 Lumens
 3.0 ft Mounting Height
 ISOLUX Curves - value in initial footcandles

Luminaire Dimensions


Luminaire	A		B		B(large)		C		D		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-105	10.63	270	3.94	100	5.42"	138	9.72	247	1.18	30	9.3	4.2
SP-106	10.63	270	3.94	100	5.82"	148	9.72	247	1.57	40	9.3	4.2
SP-107	10.63	270	3.94	100	6.00"	153	9.72	247	1.57	40	8.8	4.0

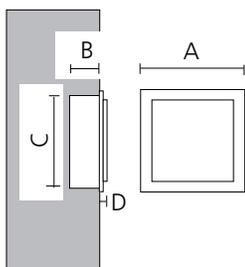

SP-105

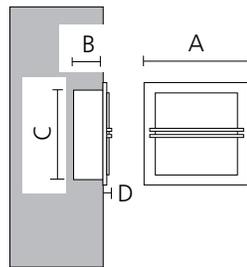

SP-106

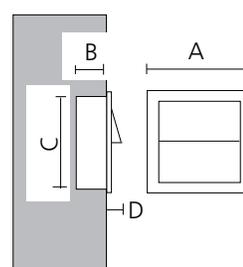

SP-107