


**Corridors**  
**Walkways**  
**Accent and**  
**General Lighting**



SP-108



SP-109

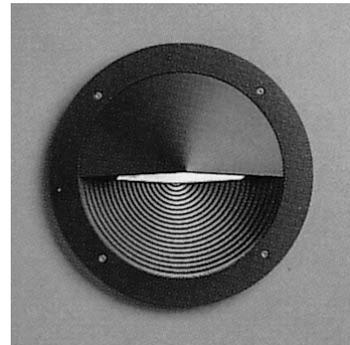

SP-110

# METRIC

SP

### Specifications

ETL, CETL, ADA, IP65

**Certifications** The fixture shall be ETL and CETL listed for wet location and concrete pour with a protection rating of IP65, dust-tight and jet-water proof. The fixture shall meet ADA requirements.

**Housing** The housing shall be constructed of die cast aluminum with two 1/2" NPT conduit entrances for through-wiring capability.

**Ballast** The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.

**Lens** The lens shall be opal polycarbonate (SP-108 and SP-109). The lens shall be clear glass (SP-110).

**Hardware** All exposed hardware shall be stainless steel.

**Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 sales@allscape.net  
 http://www.allighting.com

# SP-108/109/110

## Product Order Guide




Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>1</sup>
SP-108 / SP-109	13 CF	CF <sup>2</sup>	120	BK Black
	2(13) CF	CF <sup>2</sup>	208	BZ Bronze
	26 CFQ	CFQ <sup>2</sup>	240	WH White
	42 CFT	CFT <sup>2</sup>	277	GR Green
				NA Natural Aluminum
				GY Gray
				CC Custom Color
SP-110	75 Halogen	T3mini		
	13 CF	CF <sup>2</sup>		
	26 CFQ	CFQ <sup>2</sup>		

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> CF = single biax, CFQ = double biax, CFT = triple biax

### Example: SP-108-13CF-120-BK-PL

## Photometric Data




SP-108-(2)13CF-GL  
 1,720 Lumens  
 3.0 ft Mounting Height  
 ISOLUX Curves - value in initial footcandles

SP-109-60INC-GL  
 890 Lumens  
 3.0 ft Mounting Height  
 ISOLUX Curves - value in initial footcandles


SP-110-13CF-BK  
 860 Lumens  
 3.0 ft Mounting Height  
 ISOLUX Curves - value in initial footcandles

## Luminaire Dimensions


Luminaire	A		B		B(large)		C		D		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-108	10.63	270	3.94	100	5.42	138	9.72	247	1.18	30	7.1	3.2
SP-109	10.63	270	3.94	100	5.82	148	9.72	247	1.57	40	7.1	3.2
SP-110	10.63	270	3.94	100	6.00	153	9.72	247	1.97	50	6.7	3.0



SP-108



SP-109



SP-110