


## INSTALLATION SHEET

### Safety, Warnings and Suggestions

- <sup>1</sup> **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- <sup>2</sup> **Avoid** installing fixtures in locations where water collects and stands for prolonged periods.
- <sup>3</sup> **Make** sure that electrical power is disconnected before any work is performed.
- <sup>4</sup> **All** gaskets and sealing surfaces must be kept clean during installation.
- <sup>5</sup> **All** wiring and installation should meet local, state and national electrical codes.
- <sup>6</sup> **Install** correct lamp type and wattage.

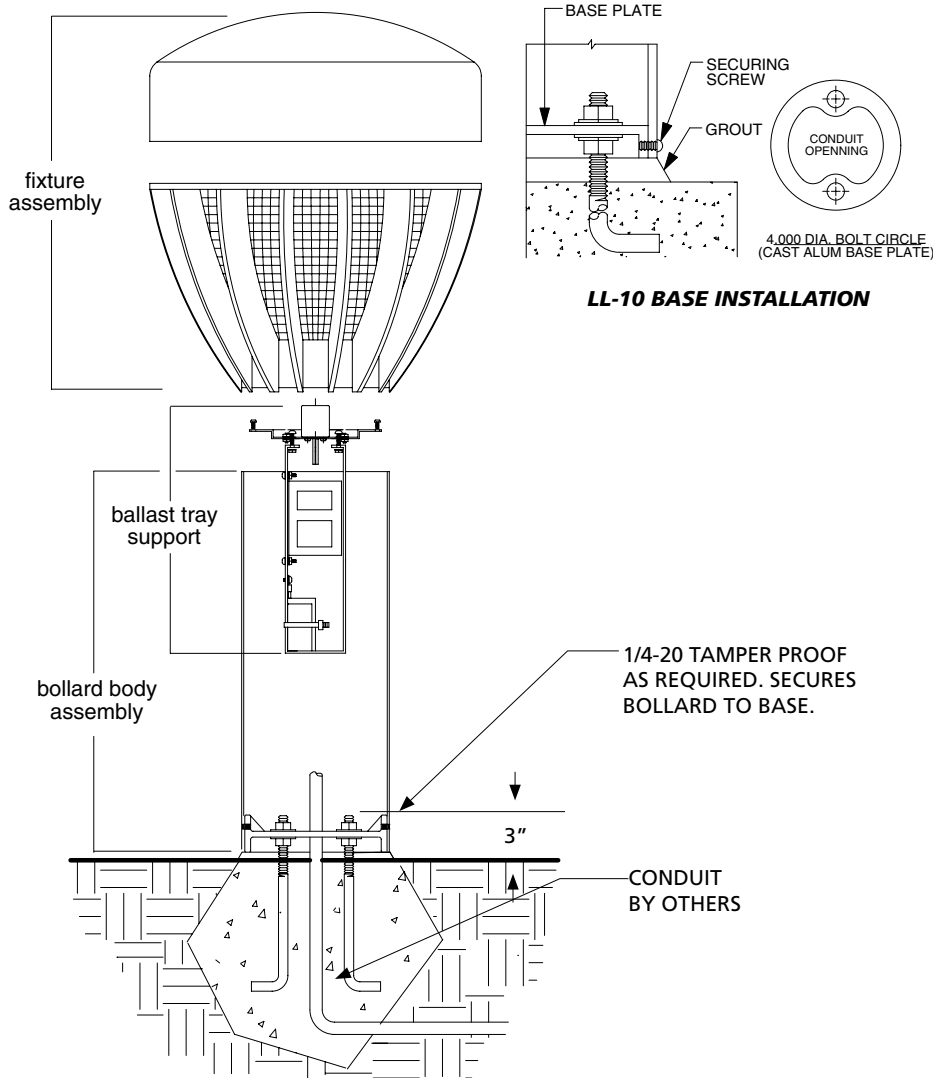

1. Prepare the site with adequate excavation and install the anchor bolts as per factory supplied template.
2. Remove the bollard from base by removing securing screws. Install the base to anchor bolts and level.
3. Remove the cast cover and the ballast tray support from the fixture housing by loosening the screws from the side of the cover.
4. Take the bollard body assembly and install over the cast base and secure the body with the 1/4-20 tamper proof screws.
5. Replace the ballast tray support and make power and ground connection using UL approved connectors. At this time install the lamp.
6. Replace the cast cover and make sure that it is properly secured.