
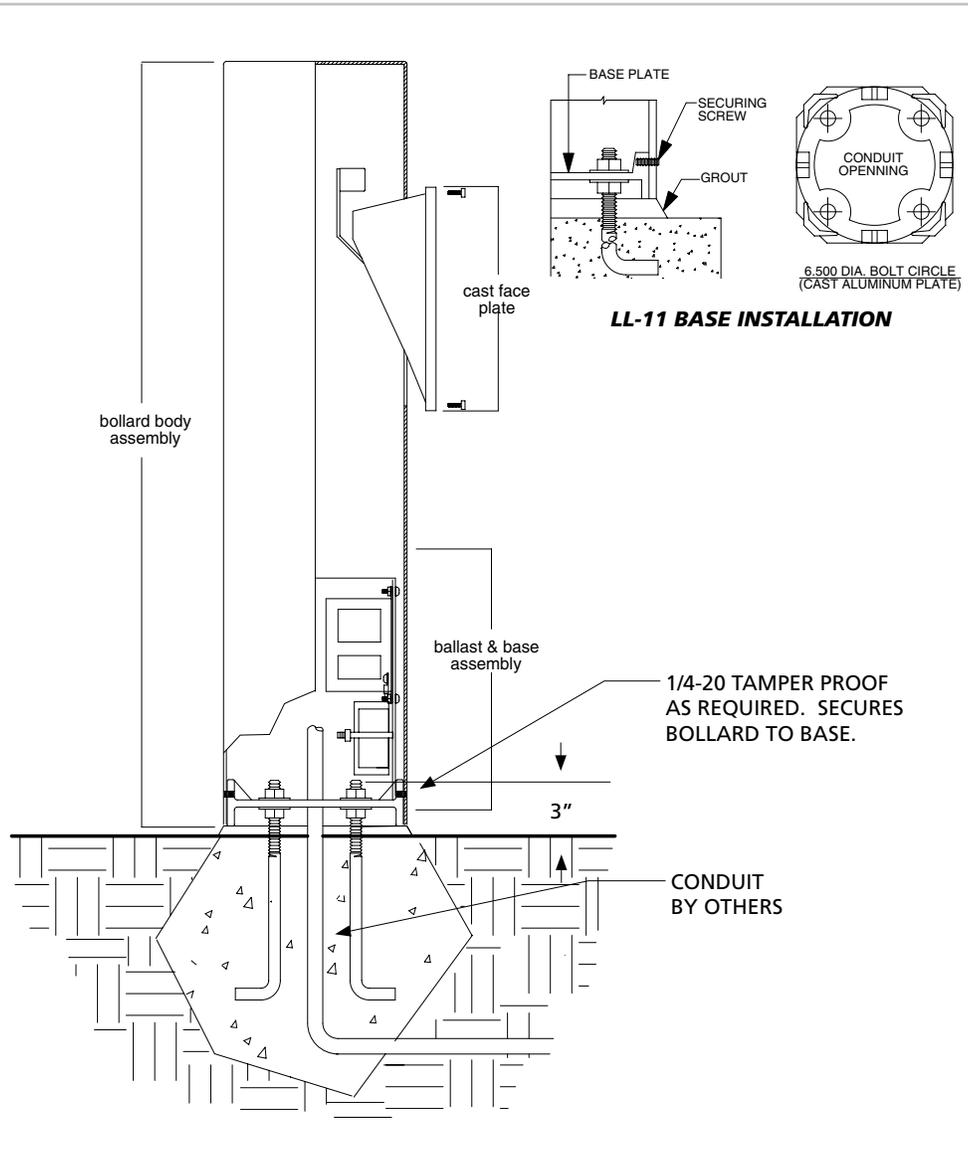


INSTALLATION SHEET

Safety, Warnings and Suggestions

- ¹ **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- ² **Avoid** installing fixtures in locations where water collects and stands for prolonged periods.
- ³ **Make** sure that electrical power is disconnected before any work is performed.
- ⁴ **All** gaskets and sealing surfaces must be kept clean during installation.
- ⁵ **All** wiring and installation should meet local, state and national electrical codes.
- ⁶ **Install** correct lamp type and wattage.



1. Prepare the site with adequate excavation and install the anchor bolts as per factory supplied template.
2. Remove the bollard from ballast & base assembly by removing (4)-securing screws. Install the base assembly to anchor bolts and level.
3. Remove the cast face plate from the fixture housing by loosening (4)-cap head screws.
4. Take the bollard body assembly and install over the cast base & ballast assembly and secure the body with the 1/4-20 tamper proof screws.
5. Install the lamp to the cast face plate. Make power and ground connection using UL approved connectors. Replace the cast face plate with the 1/4-20 cap screws. **NOTE: MAKE SURE BEFORE INSTALLING THE FACE PLATE, THAT THE GASKET IS PROPERLY SEATED.**