


PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 allighting@earthlink.net  
 http://www.allighting.com


# BL-36/37/38/39

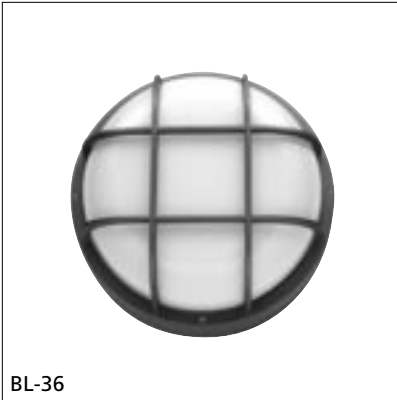

BL-36



BL-37

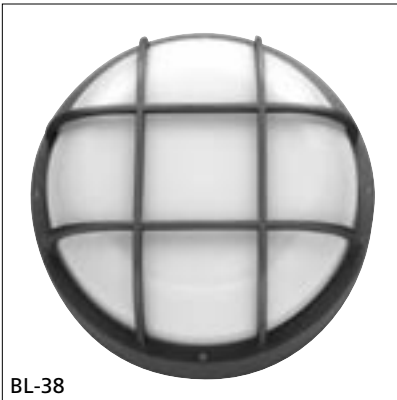

BL-38



BL-39

## Building Mount

10-1/2" or 14" Dia.

Corridor


Walkways

Accent

Building Entrances

## Luminaire Dimensions

Luminaire	A	B
BL-36	10-1/2"	7"
BL-37	10-1/2"	6-1/2"
BL-38	14"	7-1/2"
BL-39	14"	7"

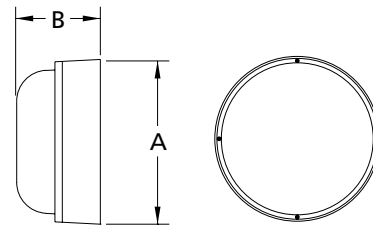

## Specifications



**Certifications** The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard.

**Ballast Housing** Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

**Lens Frame** Cast aluminum mounted to ballast housing with 1/4-20 stainless steel allen cap screws.

**Lens** Opal UV-stabilized polycarbonate (OP) is standard. Lens supplied with one-piece extruded silicone gasket.

**Ballast** Maximum HID-100 watts with polycarbonate lens. Fluorescent ballasts for 42CFT and 2-D lamps are electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

**Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Lens	Finish <sup>1</sup>	Options
BL-36	(2) 18 CFQ	CFQ <sup>2</sup>	120	OP Opal Polycarbonate	BK Black	EMG <sup>3</sup> Emergency Battery Backup
BL-37	(2) 26 CFQ <sup>3</sup>	CFQ <sup>2</sup>	208	OG Opal Glass	BZ Bronze	
BL-38	42 CFT <sup>3</sup>	CFT <sup>2</sup>	240		WH White	
BL-39	21 Watt 2-D	F212D	277		GR Green	
	38 Watt 2-D <sup>3</sup>	F382D			NA Natural Aluminum	
	100 MH <sup>3</sup>	E-17			GY Gray	
	100 HPS <sup>3</sup>	E-17			CC Custom Color	

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> CF = single biax, CFQ = double biax, CFT = triple biax

<sup>3</sup> These options apply to BL-38 and BL-39 only. Also note BL-36 and BL-37 up to 70W MH or HPS